

PFL VARIES

TERRAM 1000 GEOTEXTILE
SEPARATOR

TYPICAL GRAVEL ROAD CONSTRUCTION
SCALE 1:20

A 18.06.21 PLANNING ISSUE MN MMcC

Rev Date Description By Chkd.

1. FIGURED DIMENSIONS ONLY TO BE TAKEN

3. ENGINEER/EMPLOYERS REPRESENTATIVE, AS

APPROPRIATE, TO BE INFORMED BY THE

CONTRACTOR OF ANY DISCREPANCIES

2. ALL DRAWINGS TO BE CHECKED BY THE

BEFORE ANY WORK COMMENCES

4. THE CONTRACTOR SHALL UNDERTAKE A

THOROUGH CHECK FOR THE ACTUAL

5. ALL LEVELS SHOWN RELATE TO ORDNANCE

SURVEY DATUM AT MALIN HEAD

LOCATION OF ALL SERVICES/UTILITIES,

ABOVE AND BELOW GROUND, BEFORE ANY

FROM THIS DRAWING.

CONTRACTOR ON SITE

WORK COMMENCES



Project:

NOTES:

PROFILE PARK POWER PLANT

Title:

TYPICAL CAR PARK & ROAD CONSTRUCTION DETAILS

Scale @ A1: As Shown

Prepared by: Checked: Date:
M. Nolan M. McCarthy June 2021

Project Director: S. Tinnelly

Drawing Status: Planning

TOBIN

CONSULTING ENGINEERS

Block 10-4, Blanchardstown Corporate Park,
Dublin 15, Ireland.
tel: +353-(0)1-8030406
fax:+353-(0)1-8030409
e-mail: dublin@tobin.ie


TOBIN Consulting Engineers will not be liable for any use of this document for any purpose other than that for which it was originally prepared and provided. Except where specifically and explicitly agreed in writing by TOBIN Consulting Engineers, as copyright holder, no part of this document may be reproduced or transmitted in any form and this document shall not be relied upon by any third party for any purpose.

VARIES FROM 310mm TO 375mm
(DEPENDING ON GULLY STRENGTH
CLASS)

MIN. 150mm THICK GRADE
20 CONCRETE SURROUND
AND BED


NOTE 1: TRAPPED GULLIES TO BE USED WHERE CONNECTED TO A COMBINED SEWER
NOTE 2: FOR STRENGTH CLASS OF GULLY REFER TO EN 124: 1994, CLAUSE 5

TYPICAL GULLY CONSTRUCTION
SCALE 1:20

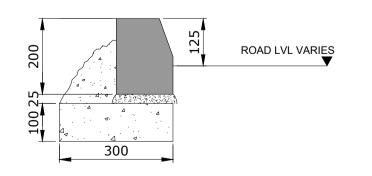

TYPE 2 - EDGE RESTRAINT CARPARK/LIGHT VEHICLES

TYPICAL EDGE RESTRAINT DETAILS
SCALE 1:10

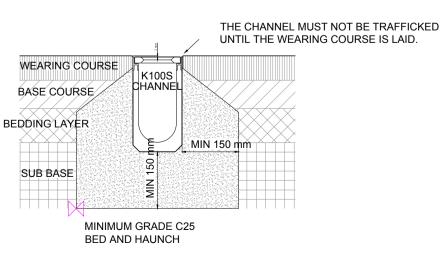

INSTALLATION EXAMPLE
FLEXIBLE PAVEMENT
SCALE 1:10