


TREE PLANTING NOTES:

1. SELECTED STANDARD TREES SHALL HAVE A TOTAL HEIGHT OF 3.5 TO 4.5 METRES AND A GIRTH OF 14 -16 CM AT 1M ABOVE GROUND LEVEL AND SHALL BE PLANTED AT LOCATIONS INDICATED.
2. EXCAVATE TREE PITS TO 1.0 CUBIC METRE VOLUME (1.2M DIA. X 0.75M DEEP). BREAK UP THE BASE OF THE PIT TO A DEPTH OF 150MM AND ROUGHEN GLAZED SIDES.
3. POSITION TREE, CENTRED IN THE PLANTING PIT AND IN AN UPRIGHT POSITION.
4. SET 3NR. PRESSURE TREATED STAKES (1.8M X 75MM DIA.) VERTICALLY IN THE PIT AND DRIVE IN TO 1.2M BELOW GROUND, 0.6M ABOVE GROUND.
5. BACKFILL THE PLANTING PIT USING THE EXCAVATED MATERIAL, INCORPORATING 500G/CU.M OF SOIL, OF 0:10:20 FERTILIZER, 200G/CU.M. OF SOIL, OF I.B.D.U FERTILIZER AND 0.3CU.M. MOIST ORGANIC MATTER. FIRM THE BACKFILLED MATERIAL TO ENSURE THERE IS GOOD CONTACT BETWEEN THE PLANT ROOTS AND THE SOIL SUBSTRATE.
6. TREES SHALL BE PLANTED AT THE SAME DEPTH AS IN NURSERY, AS INDICATED BY THE SOIL MARK ON THE STEM OF THE TREES.
7. FIT TREE TIE. TREE TIES SHALL BE OF RUBBER, P.V.C. OR BIODEGRADABLE FABRIC COMPOSITION AND SHALL BE SECURED TO THE STAKE USING GALVANISED NAILS. SECURE TREE TIES TO ALLOW MOVEMENT BUT PREVENT DAMAGE TO THE TREE TRUNK. REMOVE TIES AFTER ONE FULL GROWING SEASON OR WHEN TREES IS FIRMLY ESTABLISHED
8. MULCH THE BASE OF THE TREE TO A DEPTH OF 75MM AT A 0.5M RADIUS AROUND EACH TREE.

D0 HEAVY STANDARD TREE (14-16cm girth) Scale 1:25 (Section)

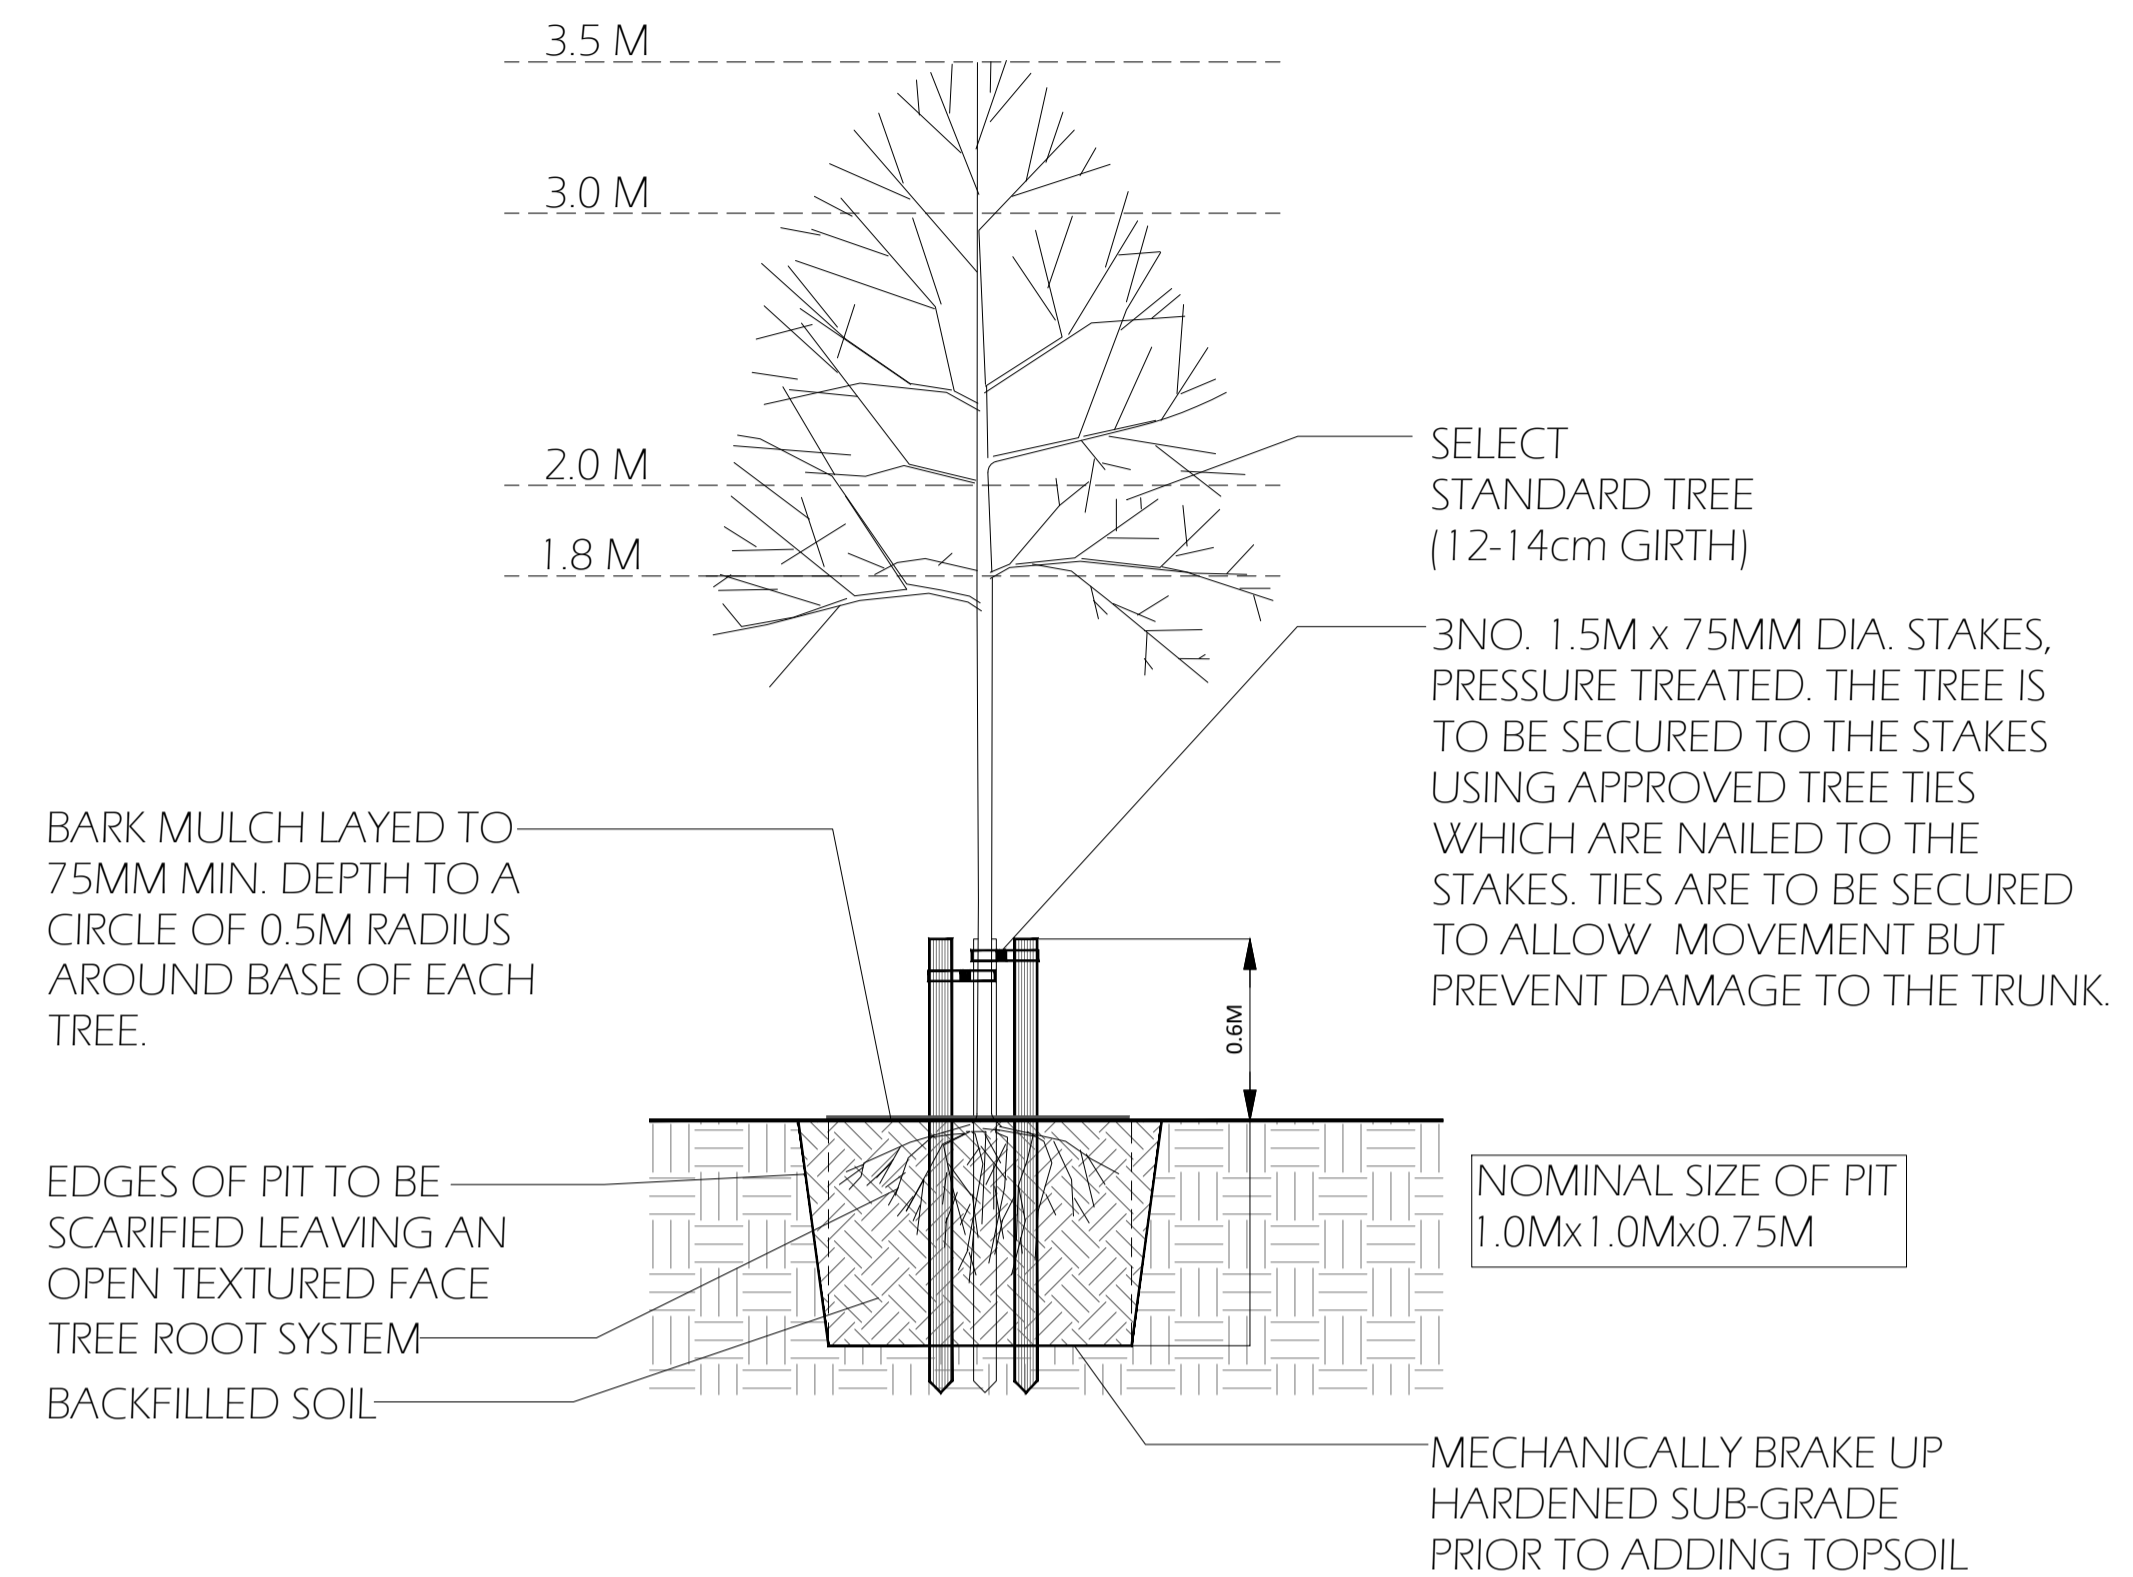

TREE PLANTING NOTES:

1. SELECTED STANDARD TREES SHALL HAVE A TOTAL HEIGHT OF 3.0 TO 3.5 METRES AND A GIRTH OF 12-14 CM AT 1M ABOVE GROUND LEVEL AND SHALL BE PLANTED AT LOCATIONS INDICATED.
2. EXCAVATE TREE PITS TO 0.75 CUBIC METRES VOLUME (1000MM DIA. X 750MM DEEP). BREAK UP THE BASE OF THE PIT TO A DEPTH OF 150MM AND ROUGHEN GLAZED SIDES.
3. POSITION TREE, CENTRED IN THE PLANTING PIT AND IN AN UPRIGHT POSITION.
4. SET 3NR. PRESSURE TREATED STAKES (1.5M X 75MM DIA.) VERTICALLY IN THE PIT AND DRIVE IN TO 0.9M BELOW GROUND, 0.6M ABOVE GROUND.
5. BACKFILL THE PLANTING PIT USING THE EXCAVATED MATERIAL, INCORPORATING 500G/CU.M OF SOIL, OF 0:10:20 FERTILIZER, 200G/CU.M. OF SOIL, OF I.B.D.U FERTILIZER AND 0.3CU.M. MOIST ORGANIC MATTER. FIRM THE BACKFILLED MATERIAL TO ENSURE THERE IS GOOD CONTACT BETWEEN THE PLANT ROOTS AND THE SOIL SUBSTRATE.
6. TREES SHALL BE PLANTED AT THE SAME DEPTH AS IN NURSERY, AS INDICATED BY THE SOIL MARK ON THE STEM OF THE TREES.
7. FIT TREE TIE. TREE TIES SHALL BE OF RUBBER, P.V.C. OR BIODEGRADABLE FABRIC COMPOSITION AND SHALL BE SECURED TO THE STAKE USING GALVANISED NAILS. SECURE TREE TIES TO ALLOW MOVEMENT BUT PREVENT DAMAGE TO THE TREE TRUNK. REMOVE TREE TIES AFTER ONE FULL GROWING SEASON OR WHEN TREE IS FIRMLY ESTABLISHED
8. MULCH THE BASE OF THE TREE TO A DEPTH OF 75MM AT A 0.5M RADIUS AROUND EACH TREE.

D0 SELECT STANDARD TREE (12-14cm girth) Scale 1:25 (Section)

Rev	Date	Drawn	Checked	Description
0	28/01/2022	AP	MM	Issued for Compliance

Notes	

COPYRIGHT © ALL RIGHTS RESERVED.
THIS WORK IS COPYRIGHT AND CANNOT BE REPRODUCED OR COPIED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF THE ENGINEER.
DO NOT SCALE FROM THIS DRAWING. WORK ONLY FROM FIGURED DIMENSIONS.
THIS DRAWING IS TO BE READ IN CONJUNCTION WITH RELEVANT CONSULTANT'S DRAWINGS.

Ordnance Survey Ireland Licence No AR 0001522
© Ordnance Survey Ireland/Government of Ireland

Project	Microsoft Dub 14/15 and CAB Building	Project No.	6816
Orig.	Planting Details (Sheet 2 of 4)	Drawing No.	529
Scale	1:25	Status	Issued for Compliance
Date	28/01/2022	Rev.	0
Mountpleasant Business Centre, Ranelagh, Dublin D06 X7P8 Tel: +353(0)1 2081900	mail@bradyshippmanmartin.com www.bradyshippmanmartin.com	Dir.	AP
		Chd.	Passed

