


NOTES


- ① To have a clear stem height of 2000mm.
- ② 2no. 75mm diameter stakes pressure treated driven 1300mm below ground 600mm above ground with specified biodegradable adjustable tie affixed to tree & stake.
- ③ 6cm diameter perforated flexible plastic drainage pipe positioned as shown over rootball with one end open to surface to facilitate watering.
- ④ Pits to be size 1x1x1mm or 15cm wider than rootball whichever is greater. Remove the full depth of topsoil and set aside for reuse. Scarify sides, break up base of pit to a depth of 200mm and incorporate a soil ameliorant into base. Back fill pit with topsoil mixed with soil ameliorants in 150mm firm-in layers. All planting to receive a minimum of 25lt water per m² immediately after planting.
- ⑤ 50mm bark mulch in 80cm dia circle to base of trunk.

*FOR SEMI-MATURE TREES INCREASE TREE PIT SIZE ACCORDINGLY


V01 Tree Pit Detail 14-20cm Gth.- Soft Areas, Verges, Topsoil Buildouts
SCALE: 1:25@A1/1:50@A3

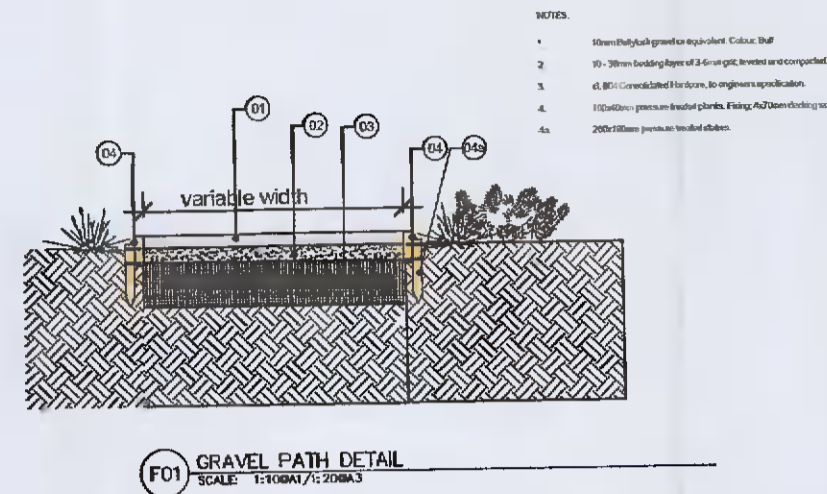

V01 GRAVEL PATH DETAIL

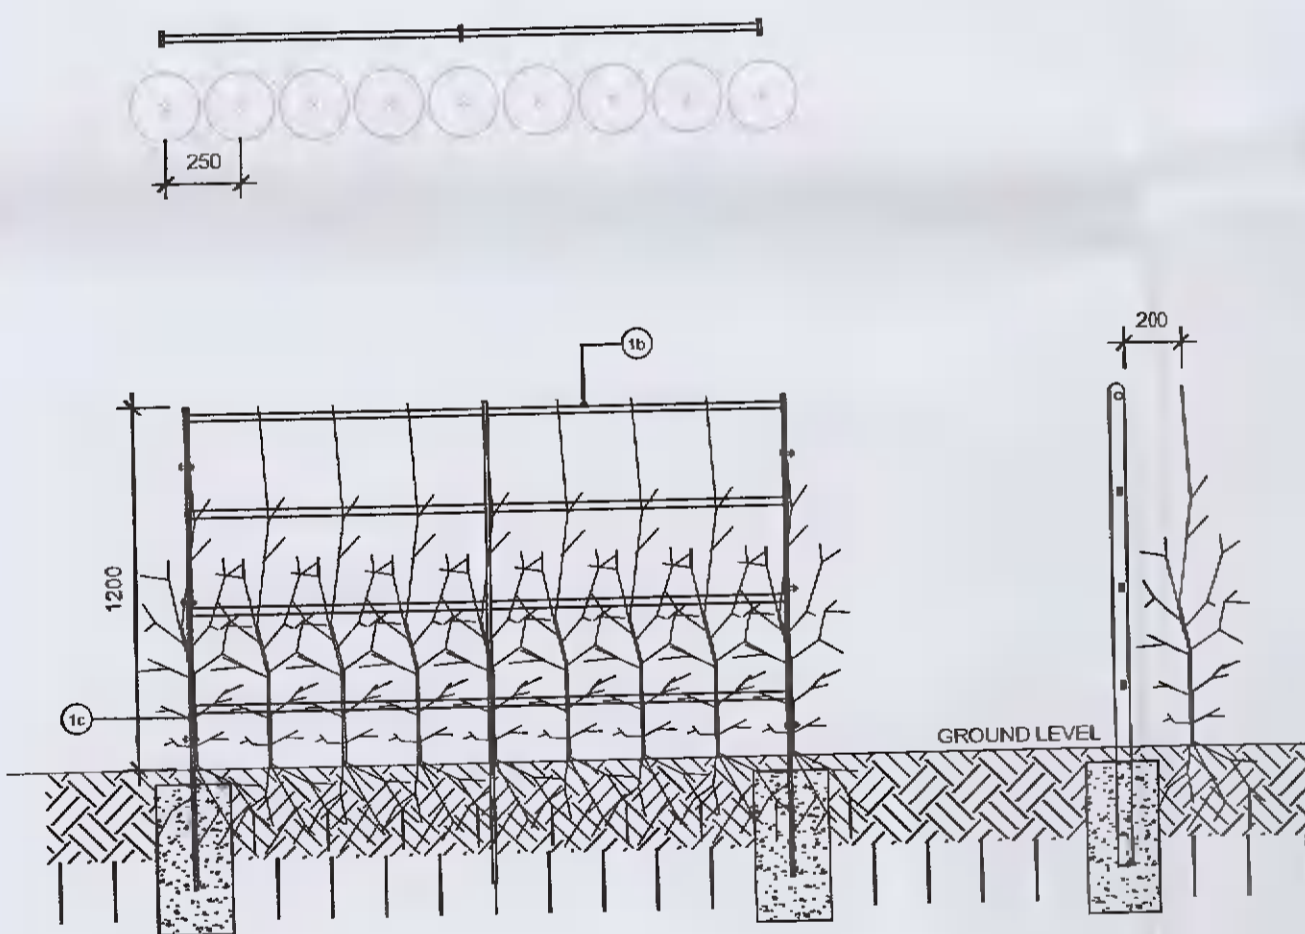


V03 Hedge Detail
SCALE: 1:25 @ A1, 1:50 @A3

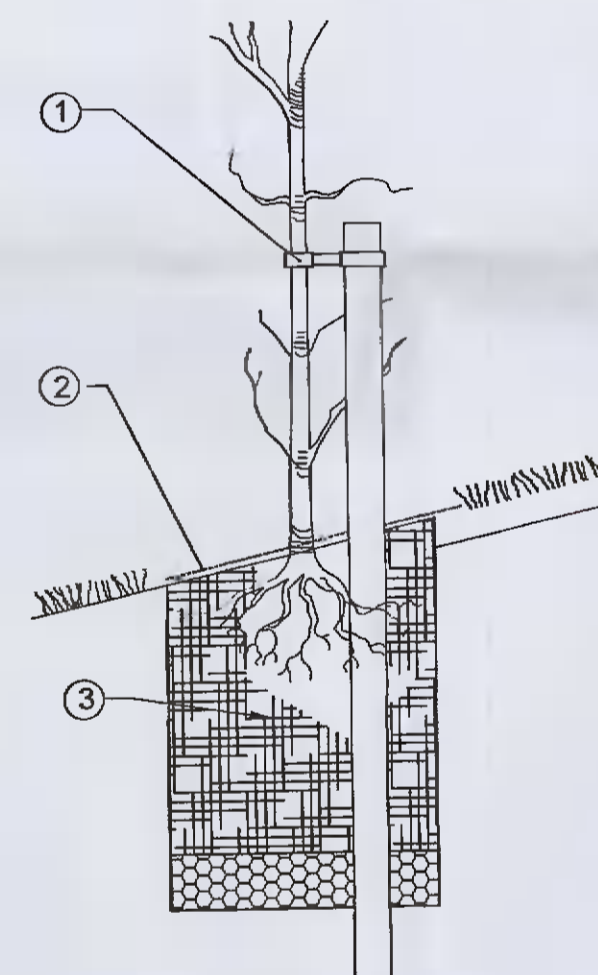

NOTES:

- ① Biodegradable adjustable tie secured to 750mm x 50mm dia. timber post driven 500mm into ground. Post to be positioned 150mm from trunk.
- ② 50mm bark mulch in 50cm dia circle to base.
- ③ Pits to have a diameter of at least 150mm wider than, and the same depth as, the rootball. Remove the full depth of topsoil and set aside for reuse. Scarify sides, break up base of pit to a depth of 150mm and incorporate a soil ameliorant, see notes for type. Back fill pit with topsoil mixed with soil ameliorants in 150mm firm-in layers. On sloping ground maintain horizontal bases and vertical sides with no less than minimum depth throughout. All planting to receive a minimum of 8lt water per tree immediately after planting.


V04 Tree Pit Detail for Feathered Trees & 6-8cm Gth.
SCALE: 1:25@A1/1:50@A3

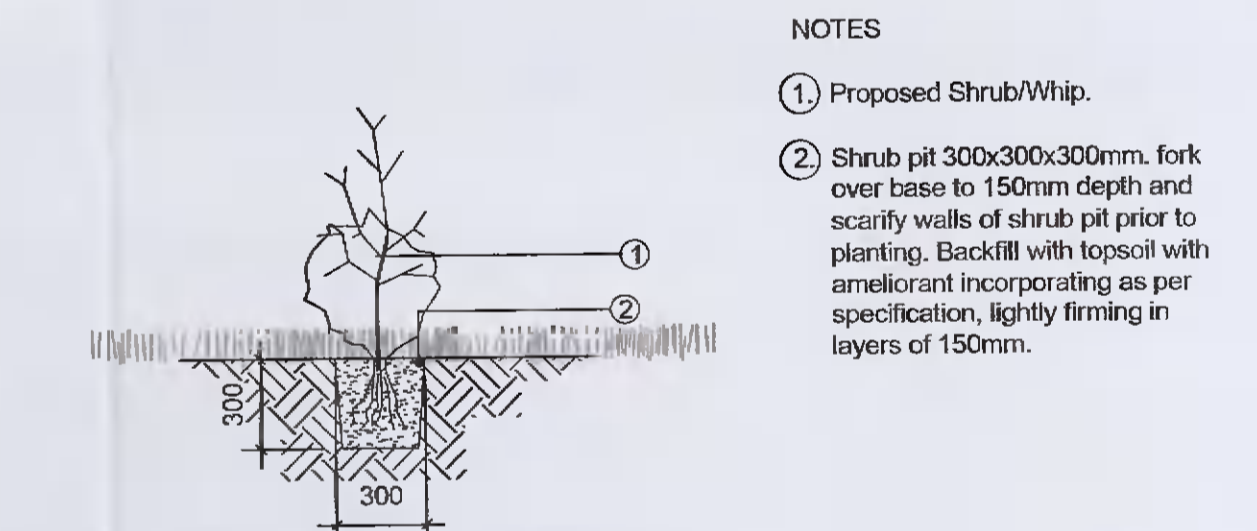

NOTES

- ① Proposed Shrub/Whip.
- ② Shrub pit 300x300x300mm. fork over base to 150mm depth and scarify walls of shrub pit prior to planting. Backfill with topsoil with ameliorant incorporating as per specification, lightly firming in layers of 150mm.


V07 Shrub/Whip Planting Detail
SCALE: 1:25@A1/1:50@A3

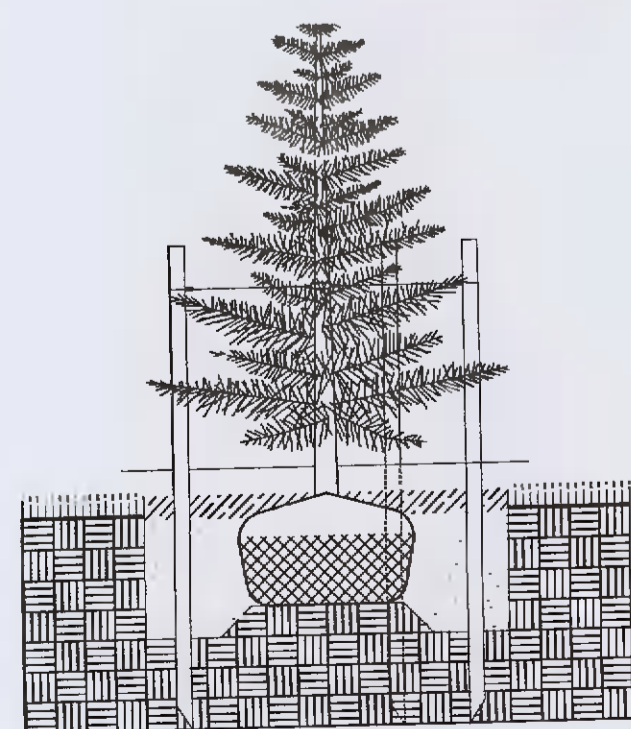

V05 Conifer & Multi-Stem Planting Detail
SCALE: 1:25@A1/1:50@A3

NOTES

- ① 3no. 7.5cm Ø stakes pressure treated driven 1300 below ground 40-60cm above ground, (depending on the height of the tree) with specified biodegradable rubber hose around wire at tree and nailed to stakes. Locate stakes 45cm from tree trunk.
- ② 6cm diameter perforated flexible plastic drainage pipe positioned as shown over rootball with one end open to surface to facilitate watering.
- ③ 50mm mulch, as per spec., to base in 60cm dia. circle.
- ④ Pits to be size 700mmsq, or 15cm wider than rootball. Remove the full depth of topsoil and set aside for reuse. Scarify sides, break up base of pit to a depth of 200mm and incorporate a soil ameliorant. Fold down or cut and remove top 1/3 of buttlap if non-biodegradable wrap is used, remove totally. All planting to receive a minimum of 5-10lt water per m² immediately after planting.

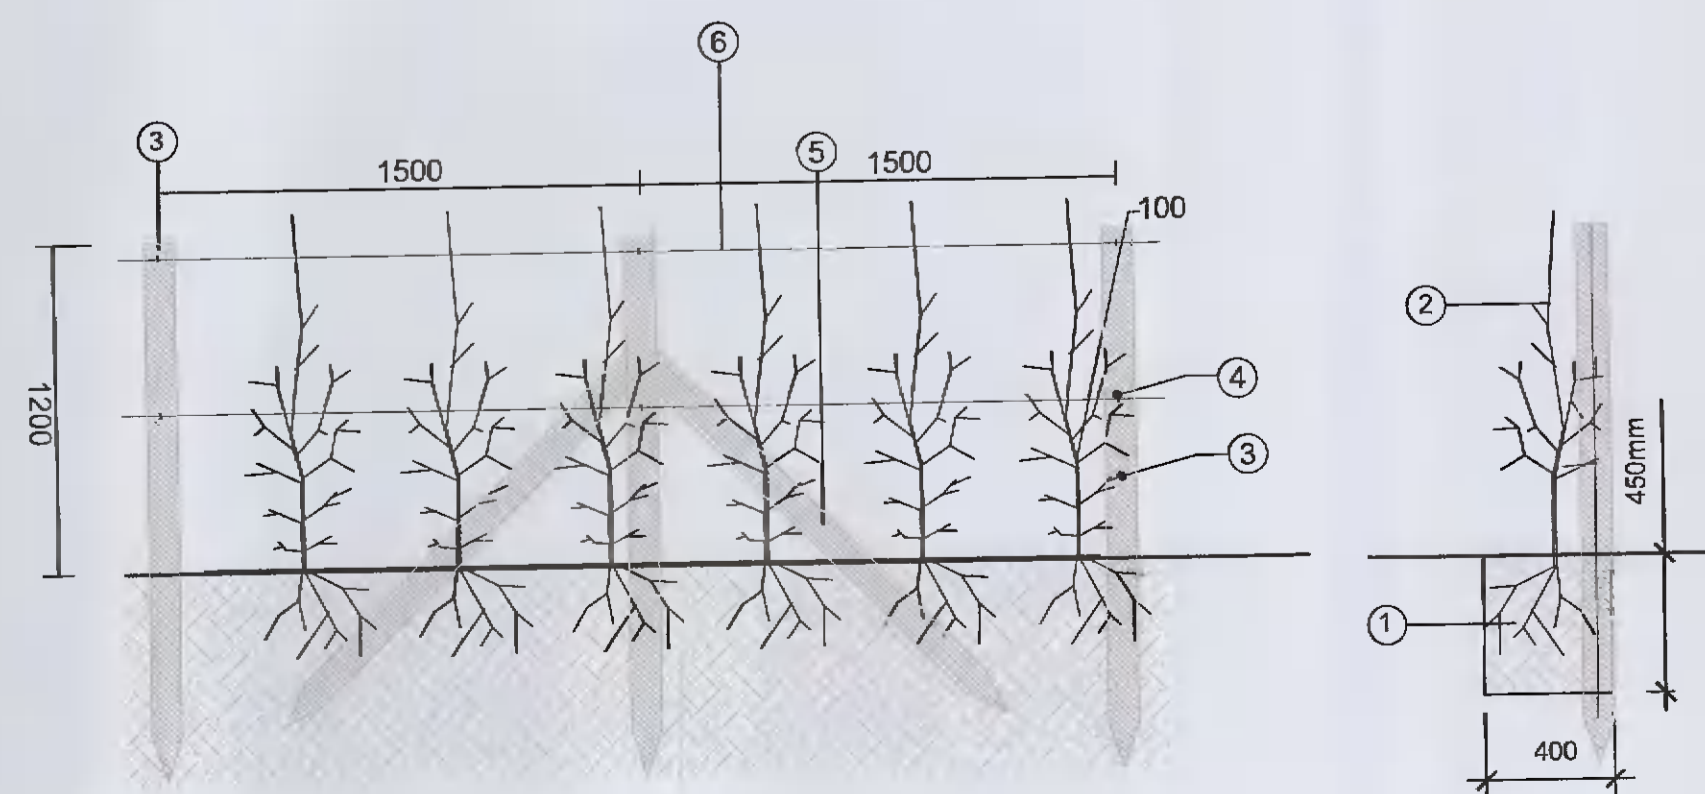

V06 Transplants with 1.2m high temporary support fence
SCALE: 1:25@A1/1:50@A3

NOTES:

Planting Transplants:

- ① The transplant planting is to be carried out single trenches dug 400 mm wide x 300 mm deep and to the required length. Mix the dug soil with the spec. ameliorants. Break up the soil in the base of the trench by 150 mm.
- ② Prepare the plants by: pruning back any damaged roots to healthy growth; placing roots of waiting plants in water whilst planting; applying an approved root-clip. Place the plants in the trench, 300 mm between the plants in the row. Backfill the trench to half its depth and firm by treading. Continue planting the trench. Once planted, backfill with the remaining soil and firm as before. Prior to new growth cut the plants hard back to within 300 mm of the ground to encourage bushy growth from the base.

FENCING NOTES: (if required for wind conditions on bund)

- ③ 1800 mm treated timber stakes driven securely into existing ground. Fencing to be positioned where there is no other wall / fence / railing beside a hedge.
- ④ Galvanized steel 100 mm gauge 'single wire' tensioned and securely fastened to posts using galvanized steel staples.
- ⑤ 1800 mm treated timber strainer posts every 15 m, change of direction, and for end of each run.
- ⑥ Plants to be tied to wire using 50mm Hessian Tree Ties or equivalent.

REV	DATE	AMENDMENT
-----	------	-----------

CUNNANE STRATTON REYNOLDS
LAND PLANNING & DESIGN

DUBLIN OFFICE
3 MOLESWORTH PLACE DUBLIN 2
TEL: 01 661 0419 FAX: 01 661 0431
EMAIL: info@cslrandplan.ie



PROJECT: PROPOSED RESIDENTIAL DEVELOPMENT AT GORDON PARK	DATE: OCTOBER 2021
DRAWING: TYPICAL PLANTING DETAILS	SCALE: VARIES @ A1
CHECKED:	DRAWN: RF
	DOL
DRAWING NO:	21578-2-700