



CRITICAL ACTIONS: (must be resolved prior to manufacture sign off and final artwork)


Sign (5) Non-illuminated FedEx Rim & Return Letterset

SPECIFICATION

- ① **LETTERS** to be 3mm x 200mm deep aluminium lid finished RAL 7044 Satin. C/W Orange 3M #180mC-3134 Opaque vinyl to & 'Ex' and White vinyl @ applied. Purple 3M #180mC-9077 Opaque vinyl to 'Fed'.
- ② **LETTER BACK TRAYS** to be 3mm full aluminium back trays with return depth to suit an overall depth of 200mm, finished RAL 7044 Satin.
- ③ **ILLUMINATION** to be non-illuminated.
- ④ **FIXING METHOD** letter back trays to be mounted to cladding using screw fixings to suit site conditions / requirements, c/w with heads painted to match returns.

NOTES:

- Full site survey required prior to installation.

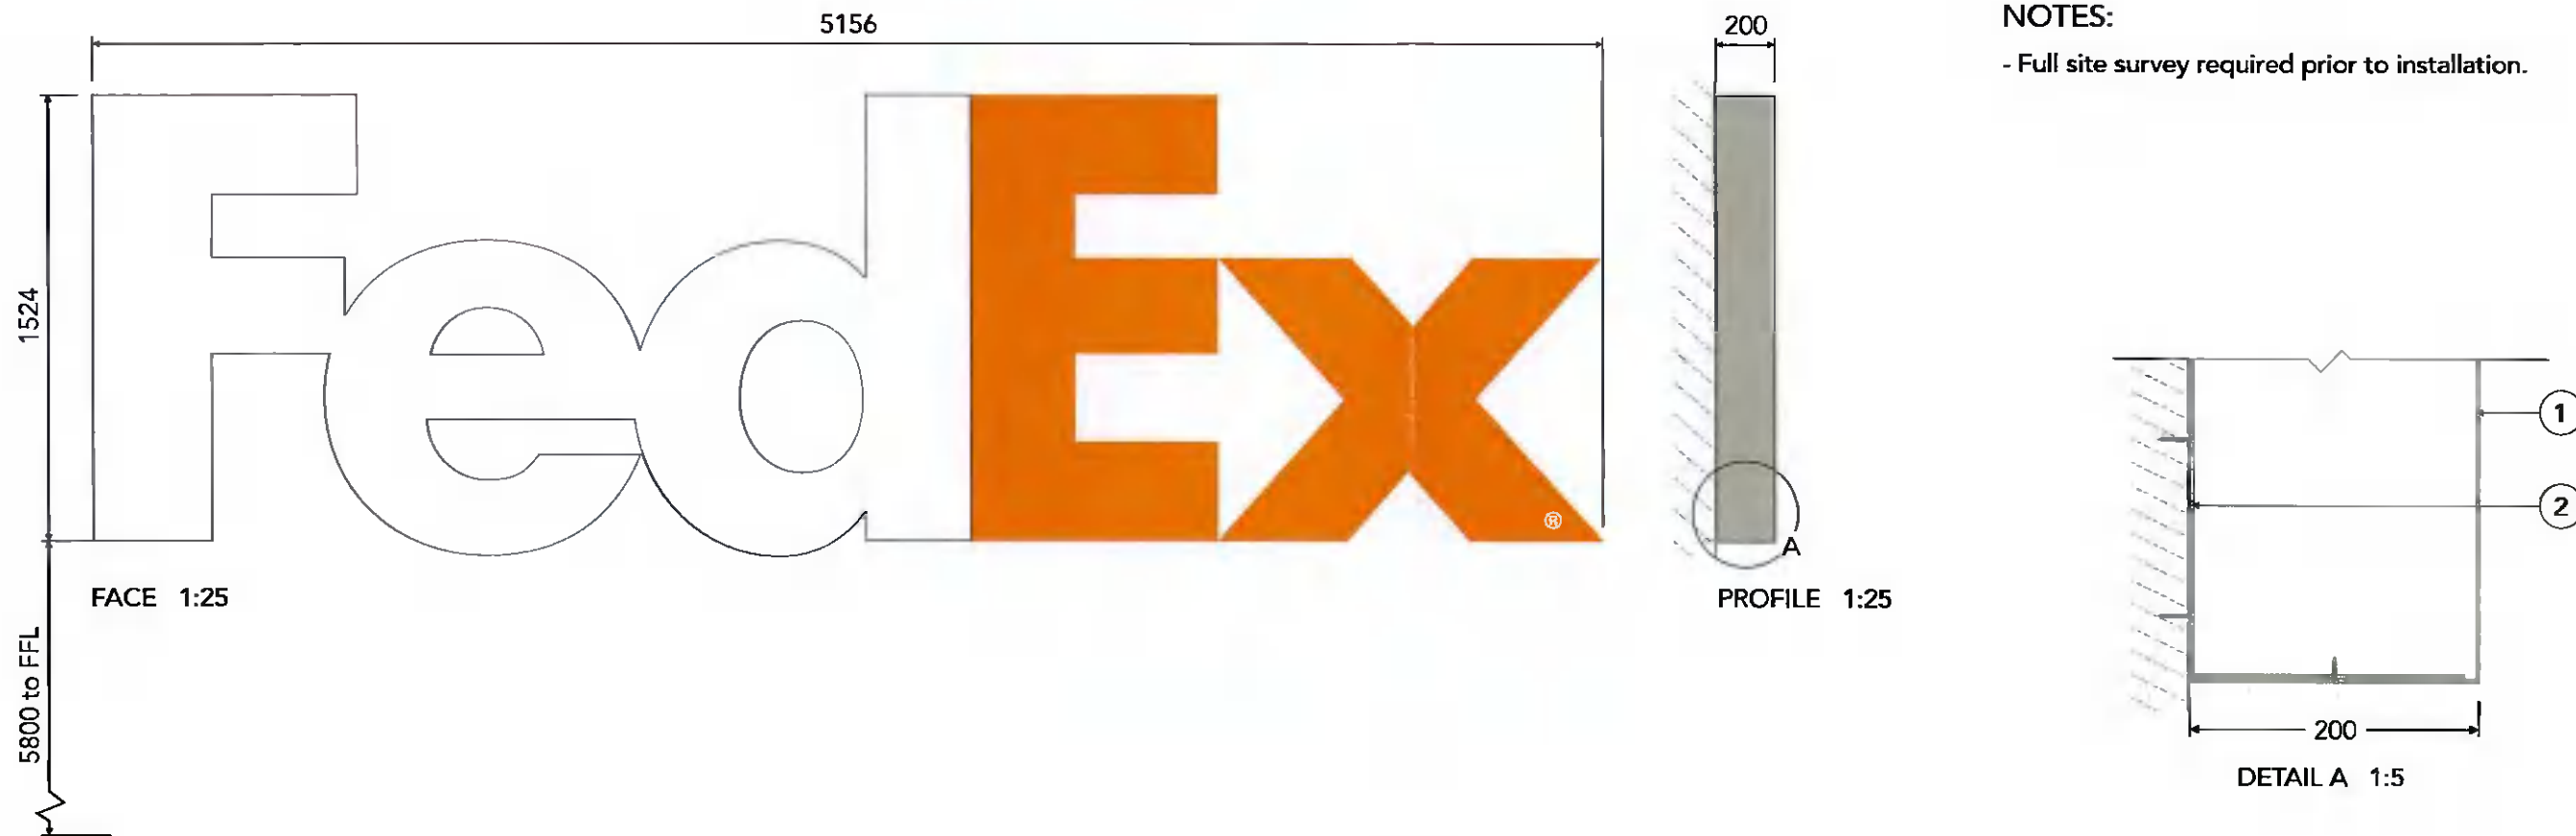

| | | | | |
|-------------|---------------------------------------------------------------------------------------|----------------------------|------------------------|--------------|
| MA | McGahon Architects Ltd | info@mcgahonarchitects.com | Registered Office | |
| | Registered in Ireland No 346586 | +353 42 933 46 77 | 19 Jocelyn Street | |
| | Directors F.McGahon, J.McGahon | mcgahonarchitects.com | Dundalk Co. Louth | |
| Project: | New signs at Unit 1 belgard industrial estate, belgard road, belgard, dublin, ireland | | | |
| Drwg title: | Sign (5) | Client: | | Pearce Signs |
| Drwg. No | 1290/PP/08 | Scale: 1:250 | Issue date: 20/01/2022 | Rev.Date |
| Rev. No | | Rev.Details | Status: Planning | |