



Appendix C

Solar Module Glare and Reflectance Technical Memo

- Hazard zone boundaries shown in the Glare Hazard plot are an approximation and visual aid. Actual ocular impact outcomes encompass a continuous, not discrete, spectrum.
- Glare locations displayed on receptor plots are approximate. Actual glare-spot locations may differ.
- Refer to the **Help page** for detailed assumptions and limitations not listed here.

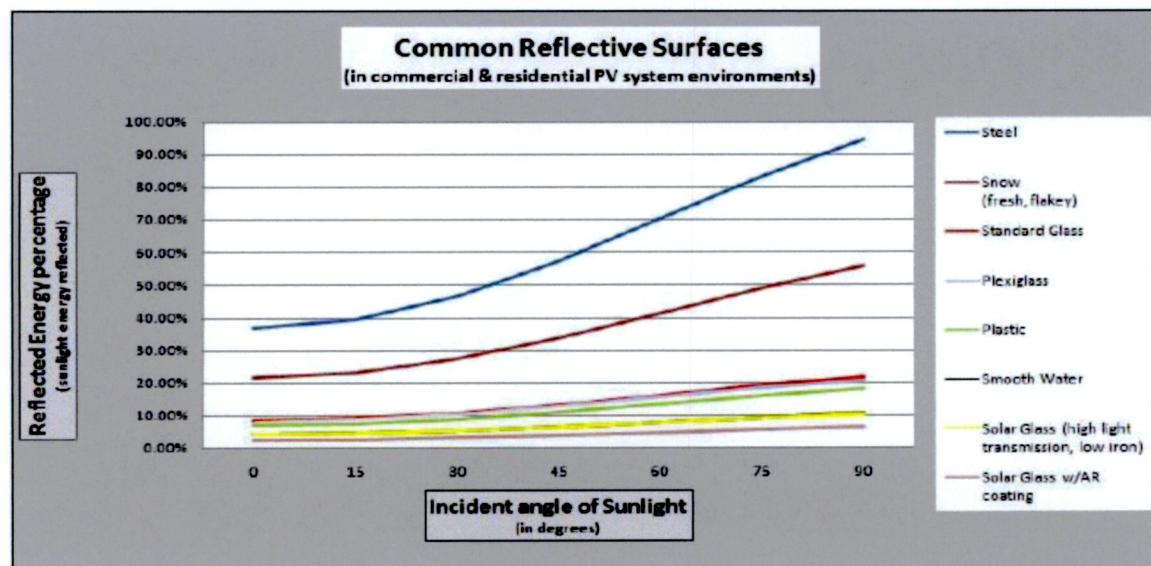

It should be noted that the reflected energy percentage of Solar Glass is far below that of a standard glass and more on the level of smooth water. Also, below are the ratios of the common reflective surfaces:

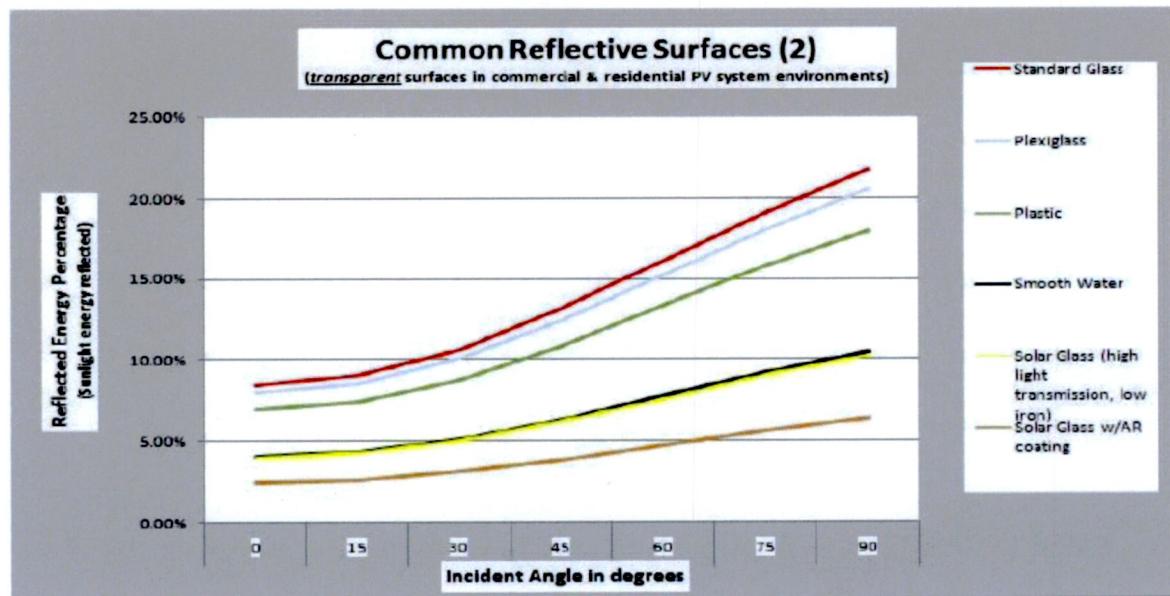

Light beam physics resolves that the least amount of light is reflected when the beam is the normal, in other words, least light energy is reflected when the beam is at 0 degrees to the normal. The chart below is a result of light beam physics calculations:



Technical Notification

TITLE: SunPower Solar Module Glare and Reflectance**AUTHORS:** Technical Support**APPLICATION:** Residential/ Commercial**SCOPE:** SunPower Modules**SUMMARY:**

The objective of this document is to increase awareness concerning the possible glare and reflectance impact of PV Systems on their surrounding environment.

The glare and reflectance levels from a given PV system are decisively lower than the glare and reflectance generated by the standard glass and other common reflective surfaces in the environments surrounding the given PV system. Concerning random glare and reflectance observed from the air: SunPower has several large projects installed near airports or on air force bases. Each of these large projects has passed FAA or Air Force standards and all projects have been determined as "No Hazard to Air Navigation". Although the possible glare and reflectance from PV systems are at safe levels and are usually decisively lower than other standard residential and commercial reflective surfaces, SunPower suggests that customers and installers discuss any possible concerns with the neighbors/cohabitants near the planned PV system installation.

DETAILED EXPLANATION:

In general, since the whole concept of efficient solar power is to absorb as much light as possible while reflecting as little light as possible, standard solar module produces less glare and reflectance than standard window glass. This is pointed out very well in US Patent #6359212 which explains the differences in the refraction and reflection of solar module glass versus standard window glass. Solar modules use "high-transmission, low iron glass" which absorbs more light, producing small amounts of glare and reflectance than normal glass.

In the graph below, we show the reflected energy percentages of sunlight, of some common residential and commercial surfaces. The legend and the graph lists the items from top to bottom in order of the highest percentage of reflected energy.

Northwest Array - Receptor (Casement Baldonnel RWY 28)*No glare found***Northwest Array - Receptor (Dublin RWY 10L)***No glare found***Northwest Array - Receptor (Dublin RWY 10R)***No glare found***Northwest Array - Receptor (Dublin RWY 16)***No glare found***Northwest Array - Receptor (Dublin RWY 28L)***No glare found***Northwest Array - Receptor (Dublin RWY 28R)***No glare found***Northwest Array - Receptor (Dublin RWY 34)***No glare found***Northwest Array - Receptor (Weston RWY 07)***No glare found***Northwest Array - Receptor (Weston RWY 25)***No glare found***Northwest Array - OP Receptor (1-ATCT)***No glare found***Northwest Array - OP Receptor (2-ATCT)***No glare found***Northwest Array - OP Receptor (3-ATCT)***No glare found***Northwest Array - OP Receptor (4-ATCT)***No glare found*







Assumptions

- Times associated with glare are denoted in Standard time. For Daylight Savings, add one hour.
- Glare analyses do not automatically account for physical obstructions between reflectors and receptors. This includes buildings, tree cover and geographic obstructions.
- Detailed system geometry is not rigorously simulated.
- The glare hazard determination relies on several approximations including observer eye characteristics, angle of view, and typical blink response time. Actual values and results may vary.
- The system output calculation is a DNI-based approximation that assumes clear, sunny skies year-round. It should not be used in place of more rigorous modeling methods.
- Several V1 calculations utilize the PV array centroid, rather than the actual glare spot location, due to algorithm limitations. This may affect results for large PV footprints. Additional analyses of array sub-sections can provide additional information on expected glare.
- The subtended source angle (glare spot size) is constrained by the PV array footprint size. Partitioning large arrays into smaller sections will reduce the maximum potential subtended angle, potentially impacting results if actual glare spots are larger than the sub-array size. Additional analyses of the combined area of adjacent sub-arrays can provide more information on potential glare hazards. (See previous point on related limitations.)

Northwest Array - Receptor (Casement Baldonnel RWY 10)

PV array is expected to produce the following glare for observers on this flight path:

- 1,688 minutes of "green" glare with low potential to cause temporary after-image.
- 0 minutes of "yellow" glare with potential to cause temporary after-image.

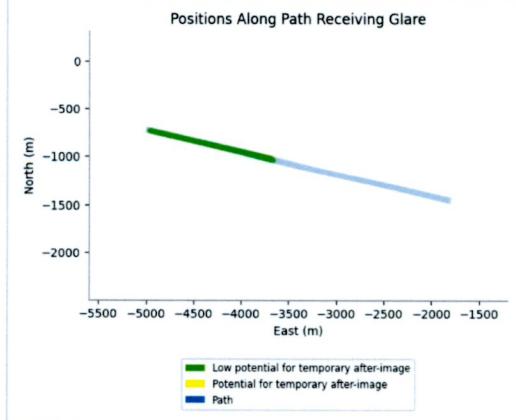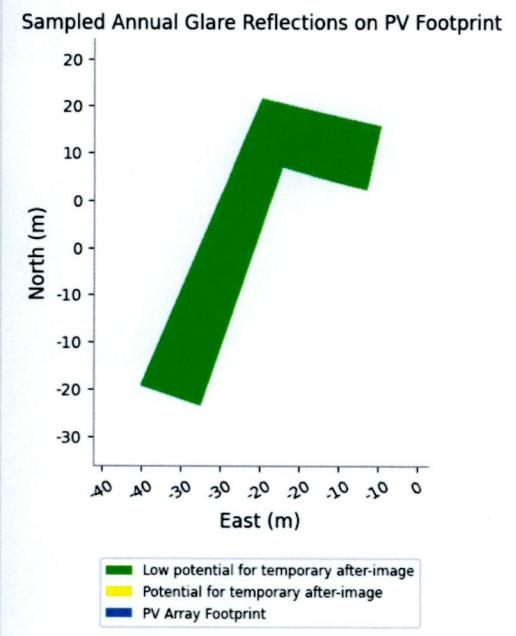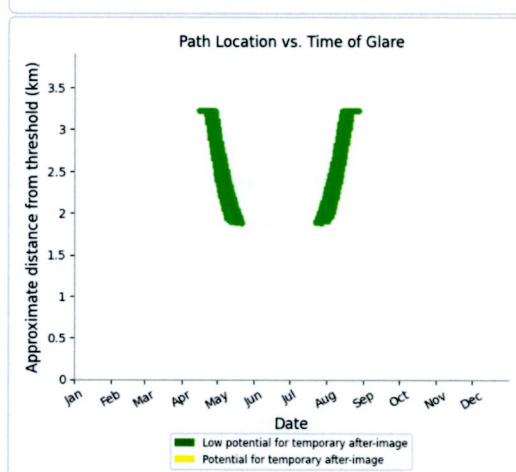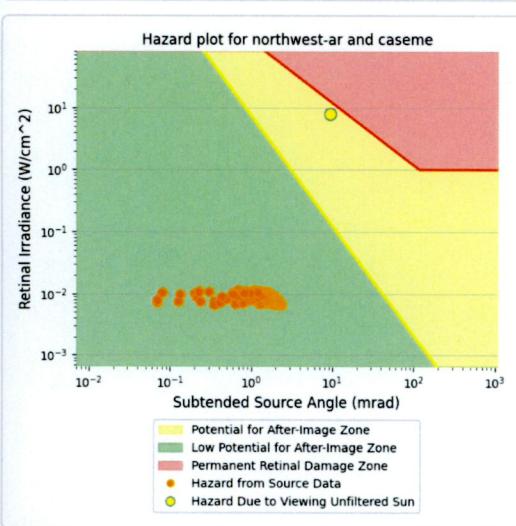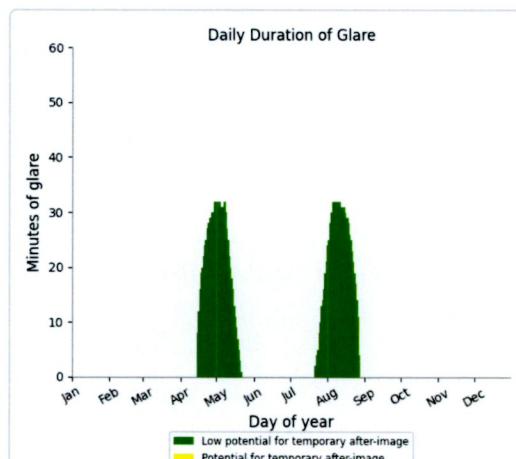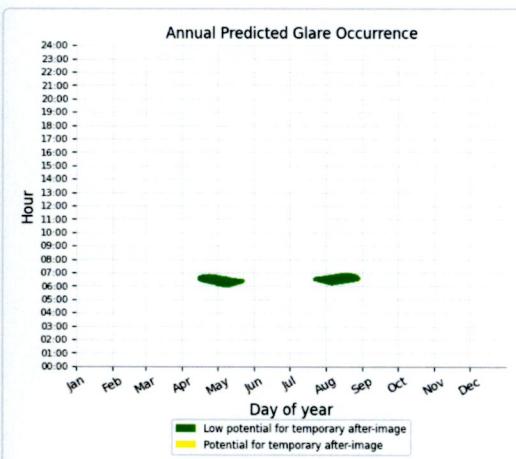

Northwest Array - Receptor (Casement Baldonnel RWY 22)

No glare found

FP: Dublin RWY 34	0	0
FP: Weston RWY 07	0	0
FP: Weston RWY 25	0	0
OP: 1-ATCT	0	0
OP: 2-ATCT	0	0
OP: 3-ATCT	0	0
OP: 4-ATCT	0	0

Northwest Array - Receptor (Casement Baldonnel RWY 04)*No glare found*







East Array - Receptor (Casement Baldonnel RWY 28)*No glare found***East Array - Receptor (Dublin RWY 10L)***No glare found***East Array - Receptor (Dublin RWY 10R)***No glare found***East Array - Receptor (Dublin RWY 16)***No glare found***East Array - Receptor (Dublin RWY 28L)***No glare found***East Array - Receptor (Dublin RWY 28R)***No glare found***East Array - Receptor (Dublin RWY 34)***No glare found***East Array - Receptor (Weston RWY 07)***No glare found***East Array - Receptor (Weston RWY 25)***No glare found***East Array - OP Receptor (1-ATCT)***No glare found***East Array - OP Receptor (2-ATCT)***No glare found***East Array - OP Receptor (3-ATCT)***No glare found***East Array - OP Receptor (4-ATCT)***No glare found***Northwest Array** low potential for temporary after-image

Component	Green glare (min)	Yellow glare (min)
FP: Casement Baldonnel RWY 04	0	0
FP: Casement Baldonnel RWY 10	1688	0
FP: Casement Baldonnel RWY 22	0	0
FP: Casement Baldonnel RWY 28	0	0
FP: Dublin RWY 10L	0	0
FP: Dublin RWY 10R	0	0
FP: Dublin RWY 16	0	0
FP: Dublin RWY 28L	0	0
FP: Dublin RWY 28R	0	0

East Array - Receptor (Casement Baldonnel RWY 10)

PV array is expected to produce the following glare for observers on this flight path:

- 1,784 minutes of "green" glare with low potential to cause temporary after-image.
- 0 minutes of "yellow" glare with potential to cause temporary after-image.

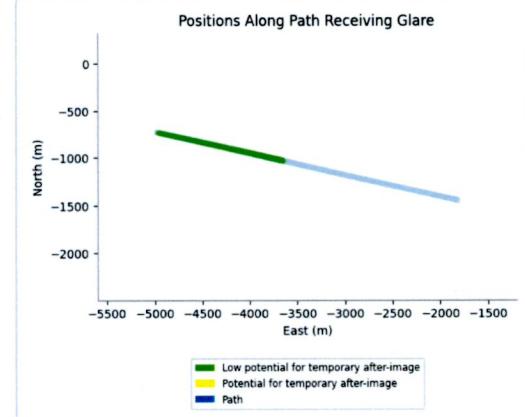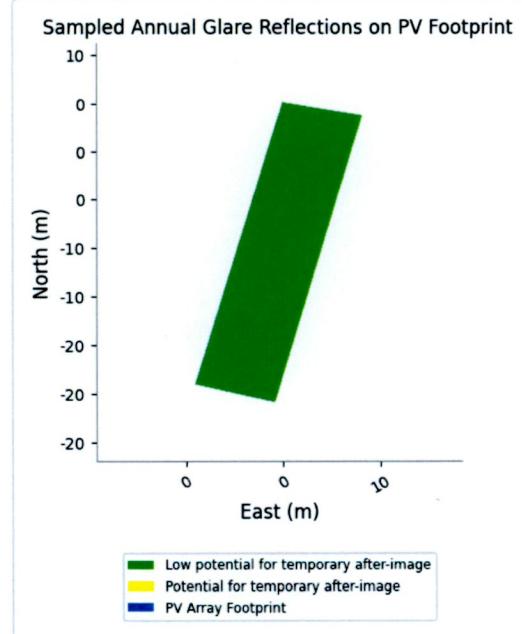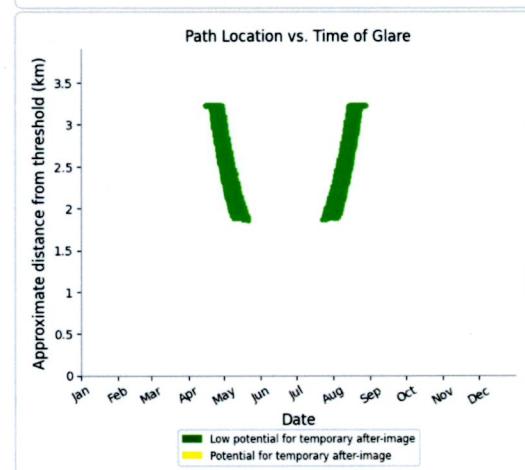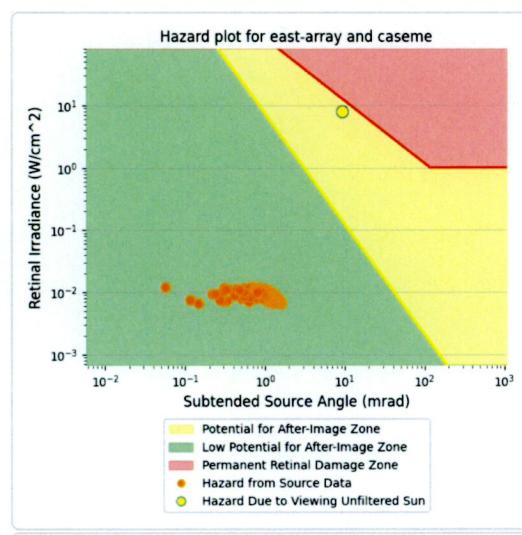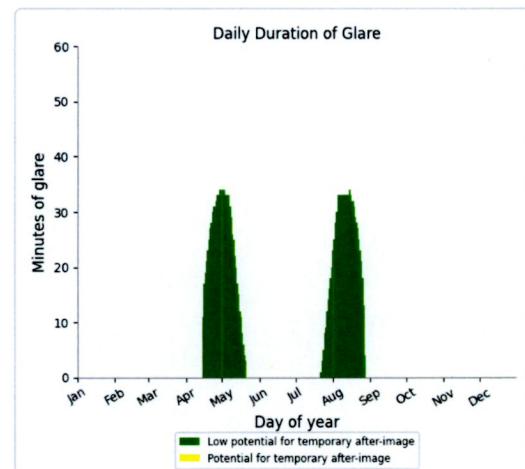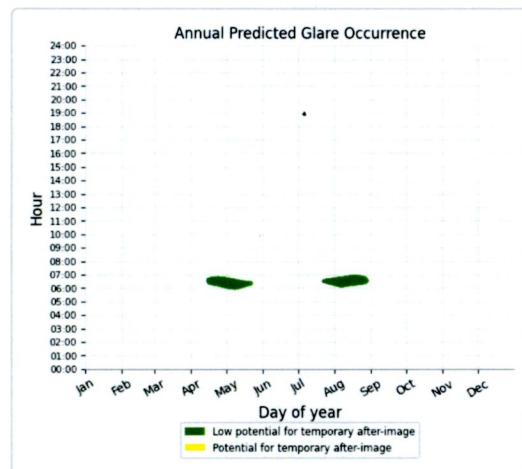

East Array - Receptor (Casement Baldonnel RWY 22)

No glare found

Summary of PV Glare Analysis

PV configuration and total predicted glare

PV Name	Tilt	Orientation	"Green" Glare	"Yellow" Glare	Energy Produced	Data File
	deg	deg	min	min	kWh	
East Array	10.0	200.0	1,784	0	-	-
Northwest Array	10.0	200.0	1,688	0	-	-

Distinct glare per month

Excludes overlapping glare from PV array for multiple receptors at matching time(s)

PV	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
east-array (green)	0	0	0	429	463	0	106	786	0	0	0	0
east-array (yellow)	0	0	0	0	0	0	0	0	0	0	0	0
northwest-ar (green)	0	0	0	383	461	0	112	732	0	0	0	0
northwest-ar (yellow)	0	0	0	0	0	0	0	0	0	0	0	0

PV & Receptor Analysis Results

Results for each PV array and receptor

East Array low potential for temporary after-image

Component	Green glare (min)	Yellow glare (min)
FP: Casement Baldonnel RWY 04	0	0
FP: Casement Baldonnel RWY 10	1784	0
FP: Casement Baldonnel RWY 22	0	0
FP: Casement Baldonnel RWY 28	0	0
FP: Dublin RWY 10L	0	0
FP: Dublin RWY 10R	0	0
FP: Dublin RWY 16	0	0
FP: Dublin RWY 28L	0	0
FP: Dublin RWY 28R	0	0
FP: Dublin RWY 34	0	0
FP: Weston RWY 07	0	0
FP: Weston RWY 25	0	0
OP: 1-ATCT	0	0
OP: 2-ATCT	0	0
OP: 3-ATCT	0	0
OP: 4-ATCT	0	0


East Array - Receptor (Casement Baldonnel RWY 04)

No glare found

Discrete Observation Receptors

Number	Latitude	Longitude	Ground elevation	Height above ground	Total Elevation
					deg m
1-ATCT	53.305502	-6.441790	93.54	0.00	93.54
2-ATCT	53.355589	-6.489455	49.60	15.00	64.60
3-ATCT	53.429047	-6.264260	65.32	87.00	152.32
4-ATCT	53.428536	-6.262179	65.68	22.00	87.68


1-ATCT map image

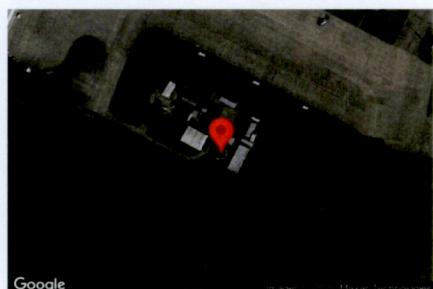

4-ATCT map image



2-ATCT map image

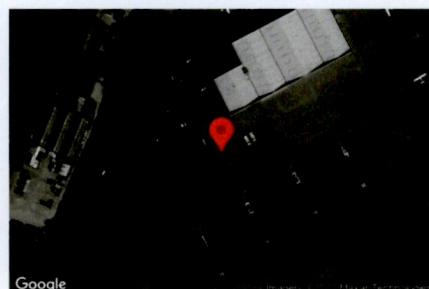

3-ATCT map image



Name: Dublin RWY 34
Description:
Threshold height: 15 m
Direction: 336.6 deg
Glide slope: 3.0 deg
Pilot view restricted? Yes
Vertical view restriction: 30.0 deg
Azimuthal view restriction: 25.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	m	m	m
Threshold	53.419987	-6.249537	62.20	15.24	77.44
2-mile point	53.393453	-6.230247	49.01	197.11	246.12



Name: Weston RWY 07
Description:
Threshold height: 15 m
Direction: 63.0 deg
Glide slope: 3.0 deg
Pilot view restricted? Yes
Vertical view restriction: 30.0 deg
Azimuthal view restriction: 25.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	m	m	m
Threshold	53.350432	-6.494490	47.64	15.24	62.88
2-mile point	53.337306	-6.537698	50.72	180.85	231.56



Name: Weston RWY 25
Description:
Threshold height: 15 m
Direction: 243.0 deg
Glide slope: 3.0 deg
Pilot view restricted? Yes
Vertical view restriction: 30.0 deg
Azimuthal view restriction: 25.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	m	m	m
Threshold	53.354180	-6.482137	46.75	15.24	61.99
2-mile point	53.367306	-6.438926	28.88	201.80	230.68



Name: Dublin RWY 16
Description:
Threshold height : 15 m
Direction: 156.6 deg
Glide slope: 3.0 deg
Pilot view restricted? Yes
Vertical view restriction: 30.0 deg
Azimuthal view restriction: 25.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	m	m	m
Threshold	53.435666	-6.260973	66.03	15.24	81.27
2-mile point	53.462200	-6.280271	68.00	181.96	249.96



Name: Dublin RWY 28L
Description:
Threshold height : 15 m
Direction: 275.2 deg
Glide slope: 3.0 deg
Pilot view restricted? Yes
Vertical view restriction: 30.0 deg
Azimuthal view restriction: 25.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	m	m	m
Threshold	53.420346	-6.251662	61.98	15.24	77.22
2-mile point	53.417740	-6.203287	42.82	203.08	245.90



Name: Dublin RWY 28R
Description:
Threshold height : 15 m
Direction: 275.3 deg
Glide slope: 3.0 deg
Pilot view restricted? Yes
Vertical view restriction: 30.0 deg
Azimuthal view restriction: 25.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	m	m	m
Threshold	53.434967	-6.238481	67.87	15.24	83.11
2-mile point	53.432297	-6.190100	32.16	219.64	251.80



Name: Casement Baldonnel RWY 28
Description:
Threshold height: 15 m
Direction: 281.4 deg
Glide slope: 3.0 deg
Pilot view restricted? Yes
Vertical view restriction: 30.0 deg
Azimuthal view restriction: 25.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	m	m	m
Threshold	53.301637	-6.444621	96.06	15.24	111.30
2-mile point	53.295923	-6.397139	110.47	169.51	279.98



Name: Dublin RWY 10L
Description:
Threshold height: 15 m
Direction: 95.2 deg
Glide slope: 3.0 deg
Pilot view restricted? Yes
Vertical view restriction: 30.0 deg
Azimuthal view restriction: 25.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	m	m	m
Threshold	53.437366	-6.284126	73.08	15.24	88.32
2-mile point	53.439986	-6.332518	78.30	178.71	257.01



Name: Dublin RWY 10R
Description:
Threshold height: 15 m
Direction: 95.2 deg
Glide slope: 3.0 deg
Pilot view restricted? Yes
Vertical view restriction: 30.0 deg
Azimuthal view restriction: 25.0 deg


Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	m	m	m
Threshold	53.422441	-6.289949	74.08	15.24	89.32
2-mile point	53.425062	-6.338325	79.46	178.55	258.01



2-Mile Flight Path Receptor(s)


Name: Casement Baldonnel RWY 04
Description:
Threshold height : 15 m
Direction: 41.4 deg
Glide slope: 3.0 deg
Pilot view restricted? Yes
Vertical view restriction: 30.0 deg
Azimuthal view restriction: 25.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	m	m	m
Threshold	53.293834	-6.453437	98.24	15.24	113.48
2-mile point	53.272160	-6.485489	153.86	128.30	282.16

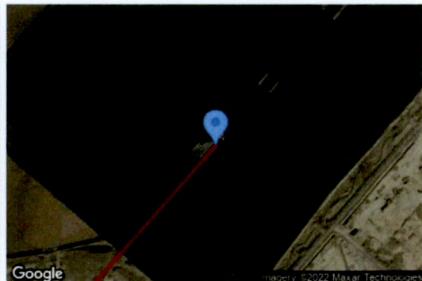


Name: Casement Baldonnel RWY 10
Description:
Threshold height : 15 m
Direction: 102.9 deg
Glide slope: 3.0 deg
Pilot view restricted? Yes
Vertical view restriction: 30.0 deg
Azimuthal view restriction: 25.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	m	m	m
Threshold	53.304637	-6.468321	86.26	15.24	101.50
2-mile point	53.311101	-6.515536	72.86	197.32	270.18

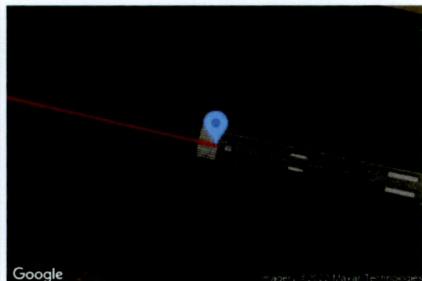

Name: Casement Baldonnel RWY 22
Description:
Threshold height : 15 m
Direction: 221.3 deg
Glide slope: 3.0 deg
Pilot view restricted? Yes
Vertical view restriction: 30.0 deg
Azimuthal view restriction: 25.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	m	m	m
Threshold	53.303279	-6.439777	93.37	15.24	108.61
2-mile point	53.325000	-6.407807	62.87	214.43	277.30

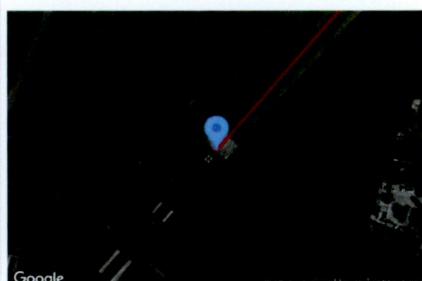

Component Data

PV Array(s)

Total PV footprint area: 494 m²

Name: East Array
Footprint area: 159 m²
Axis tracking: Fixed (no rotation)
Tilt: 10.0 deg
Orientation: 200.0 deg

Rated power: -
Panel material: Light textured glass with AR coating
Vary reflectivity with sun position? Yes
Correlate slope error with surface type? Yes
Slope error: 9.16 mrad

Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
			deg	deg	m
1	53.317642	-6.440949	74.09	16.00	90.09
2	53.317433	-6.441056	74.00	16.00	90.00
3	53.317420	-6.440960	74.29	16.00	90.29
4	53.317632	-6.440853	74.17	16.00	90.17



Name: Northwest Array
Footprint area: 334 m²
Axis tracking: Fixed (no rotation)
Tilt: 10.0 deg
Orientation: 200.0 deg

Rated power: -
Panel material: Light textured glass with AR coating
Vary reflectivity with sun position? Yes
Correlate slope error with surface type? Yes
Slope error: 9.16 mrad

Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
			deg	deg	m
1	53.317738	-6.441185	74.30	16.00	90.30
2	53.317757	-6.441319	74.33	16.00	90.33
3	53.317430	-6.441550	73.94	16.00	89.94
4	53.317408	-6.441437	73.89	16.00	89.89
5	53.317680	-6.441282	74.28	16.00	90.28
6	53.317654	-6.441121	74.22	16.00	90.22
7	53.317725	-6.441094	74.43	16.00	90.43





ForgeSolar

Profile Park DUB13 Solar Array

Profile Park DUB13 Solar Array Aviation

Created Sept. 22, 2022

Updated Sept. 27, 2022

Time-step 1 minute

Timezone offset UTC0

Site ID 76315.13502

Project type Advanced

Project status: active

Category 1 MW to 5 MW



Misc. Analysis Settings

DNI: **varies** (1,000.0 W/m² peak)

Ocular transmission coefficient: **0.5**

Pupil diameter: **0.002 m**

Eye focal length: **0.017 m**

Sun subtended angle: **9.3 mrad**

Analysis Methodology: **Version 2**

Enhanced subtended angle calculation: **On**

Summary of Results

Glare with low potential for temporary after-image predicted

PV Name	Tilt	Orientation	"Green" Glare	"Yellow" Glare	Energy Produced
			deg	deg	min
East Array	10.0	200.0	1,784	0	-
Northwest Array	10.0	200.0	1,688	0	-



AERODROME CHART - ICAO 53 21 08.25 N 006 29 17.92 W			ELEV 155FT	TWR 122.4 GND 119.425 ATIS 118.875	CONSULT NOTAM FOR LATEST INFORMATION	WESTON AIRPORT / DUBLIN
RWY	DIRECTION	THR	BEARING STRENGTH		LEGEND	
07	068°	53 21 01.48 N 006 29 40.17 W	PCN 45/F/A/W/T		HELICOPTER STANDS	1 

BEARINGS ARE MAGNETIC.

LINEAR DIMENSIONS IN METRES.

ELEVATIONS IN FEET AMSL.

HEIGHTS IN FEET ABOVE AERODROME ELEVATION SHOWN IN BRACKETS.

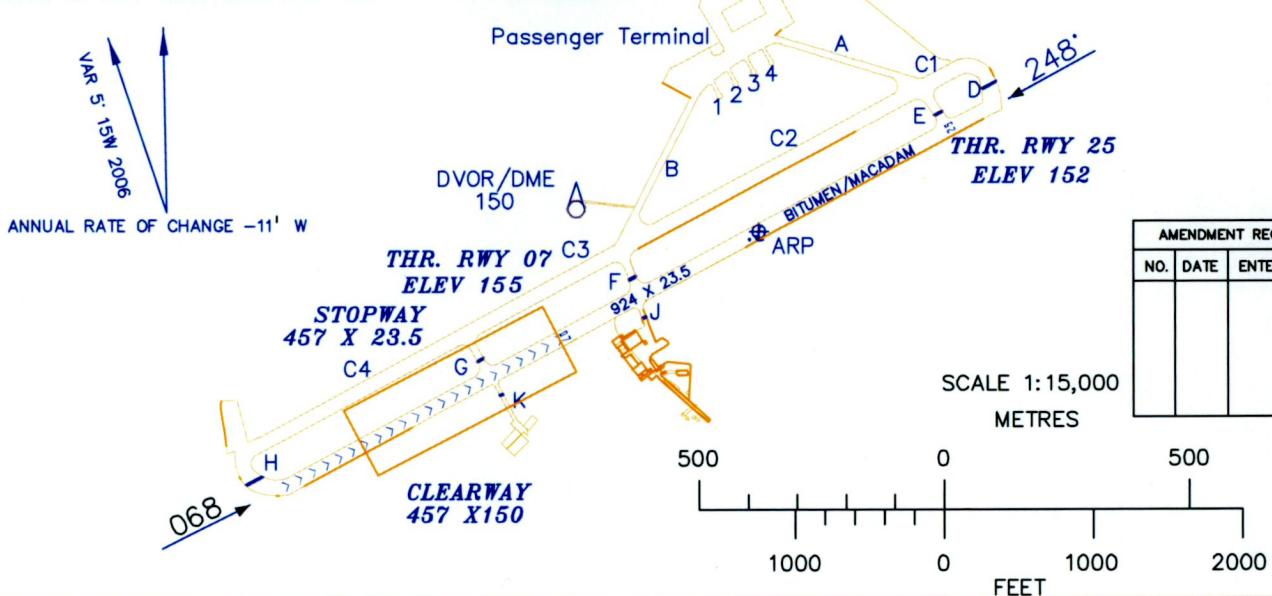

MARKING AIDS RUNWAY 07/25

NIL

LIGHTING AIDS RUNWAY 07/25

Helicopter Stand	Latitude	Longitude	Max Wingspan	Max Length	Conditions
01	53 21 17.18 N	006 29 22.05 W			
02	53 21 17.96 N	006 29 20.18 W			
03	53 21 18.67 N	006 29 18.25 W			
04	53 21 19.31 N	006 29 16.26 W			

NOTE 1: TAXIWAY AND APRON : PCN 45/F/A/W/T.

NOTE 2: TAXIWAY C1, C2, C3 AND C4: 30M WIDE.

NOTE 3: TAXIWAY A, B, D, E, F, G, H AND J: 16M WIDE.

NOTE 4: TAXIWAY K: 7M WIDE.

CHANGES: NEW APP COORDINATES: NEW THRESHOLD COORDINATES FOR RUNWAY 25 AND 07;

IRISH AIR CORPS

RNAV STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO


TRANS ALT 5000ft
TRANS LEVEL by ATC


TWR	123.500
BAL RADAR	122.000
ATIS	122.805
DUBLIN LOWER SOUTH	120.755
DUBLIN LOWER NORTH	132.580


EIME AD 2.24-29


BALDONNEL/CASEMENT (MIL)
RWY 22/28


NIMAT 1K, BOYNE 1K, BAGSO 1K, LIPGO 1S, VATRY 1S,
BUNED 1S, SUTEX 1S, OSGAR 1S, OLAP 1K, BAMLI 1K.

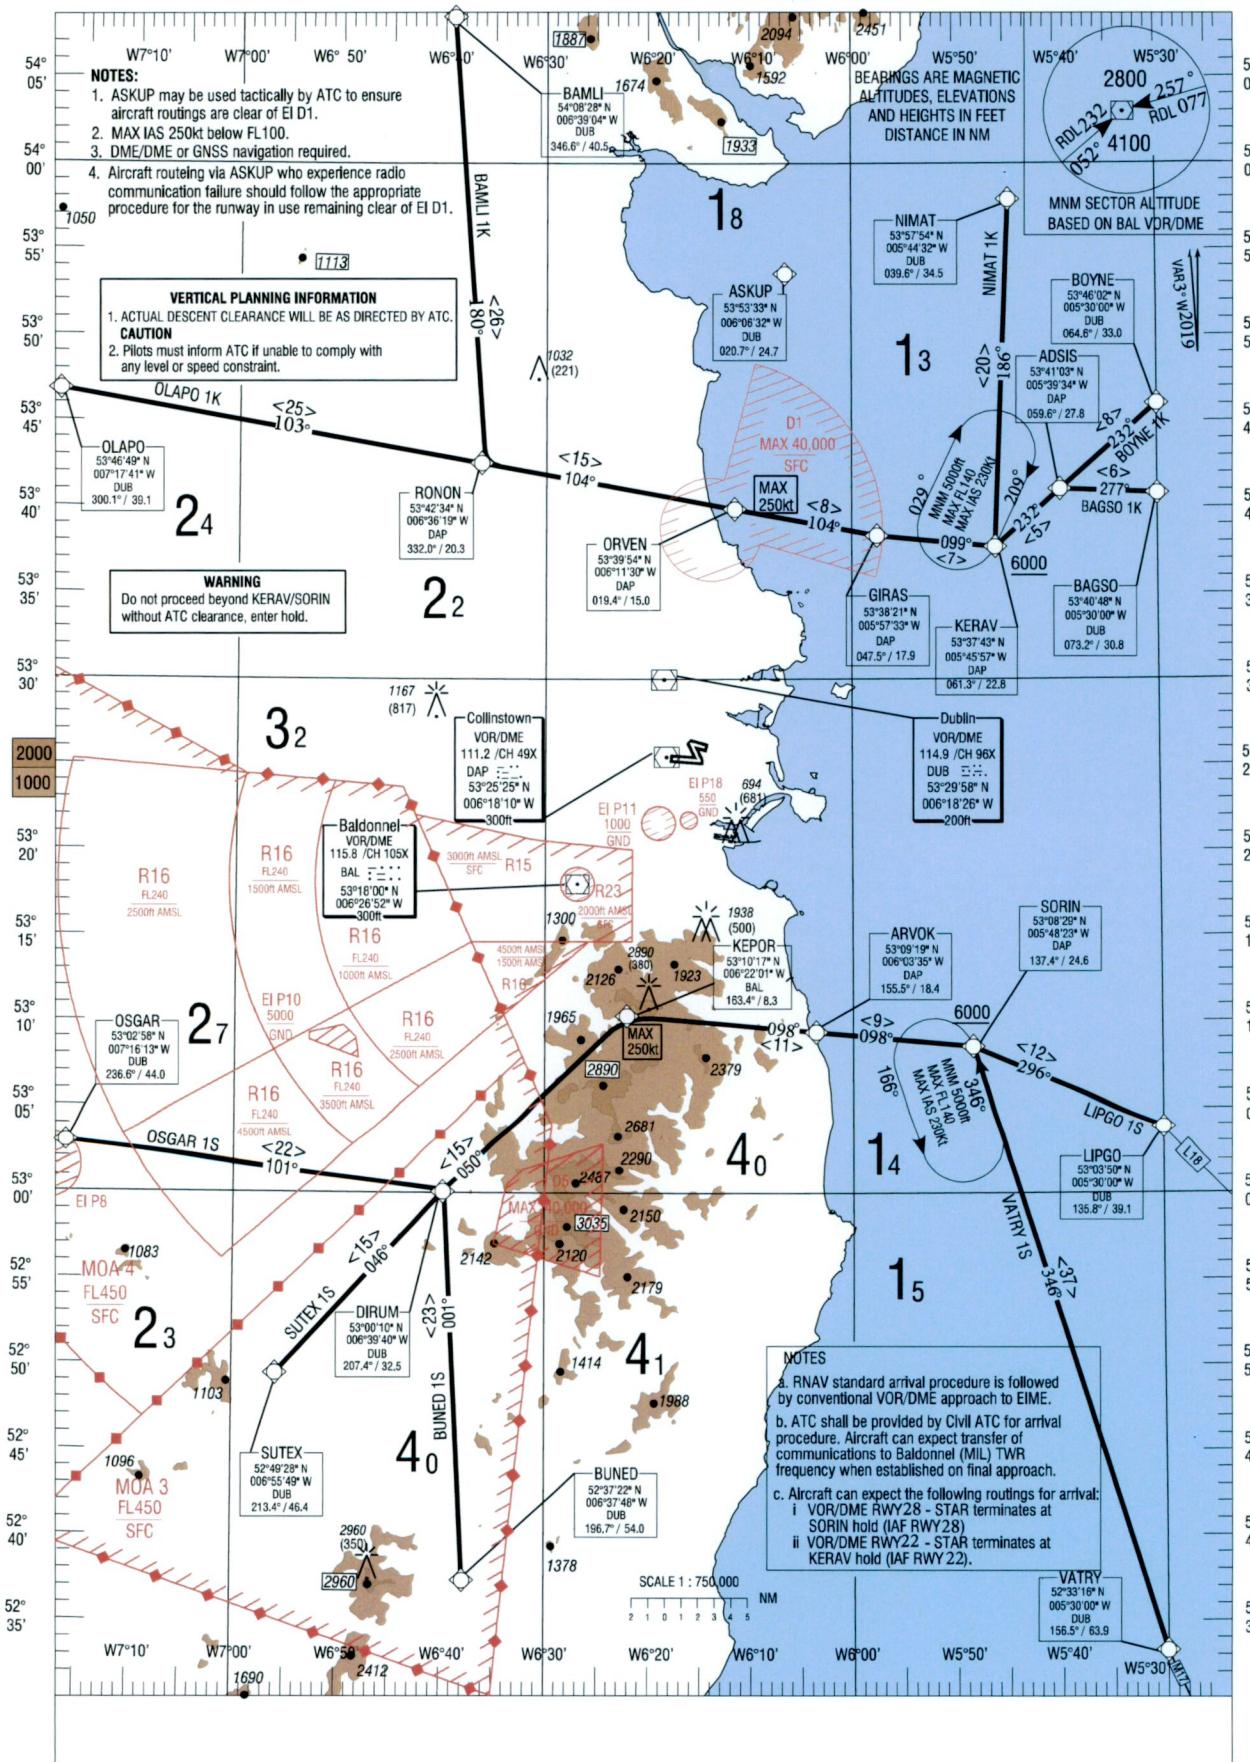


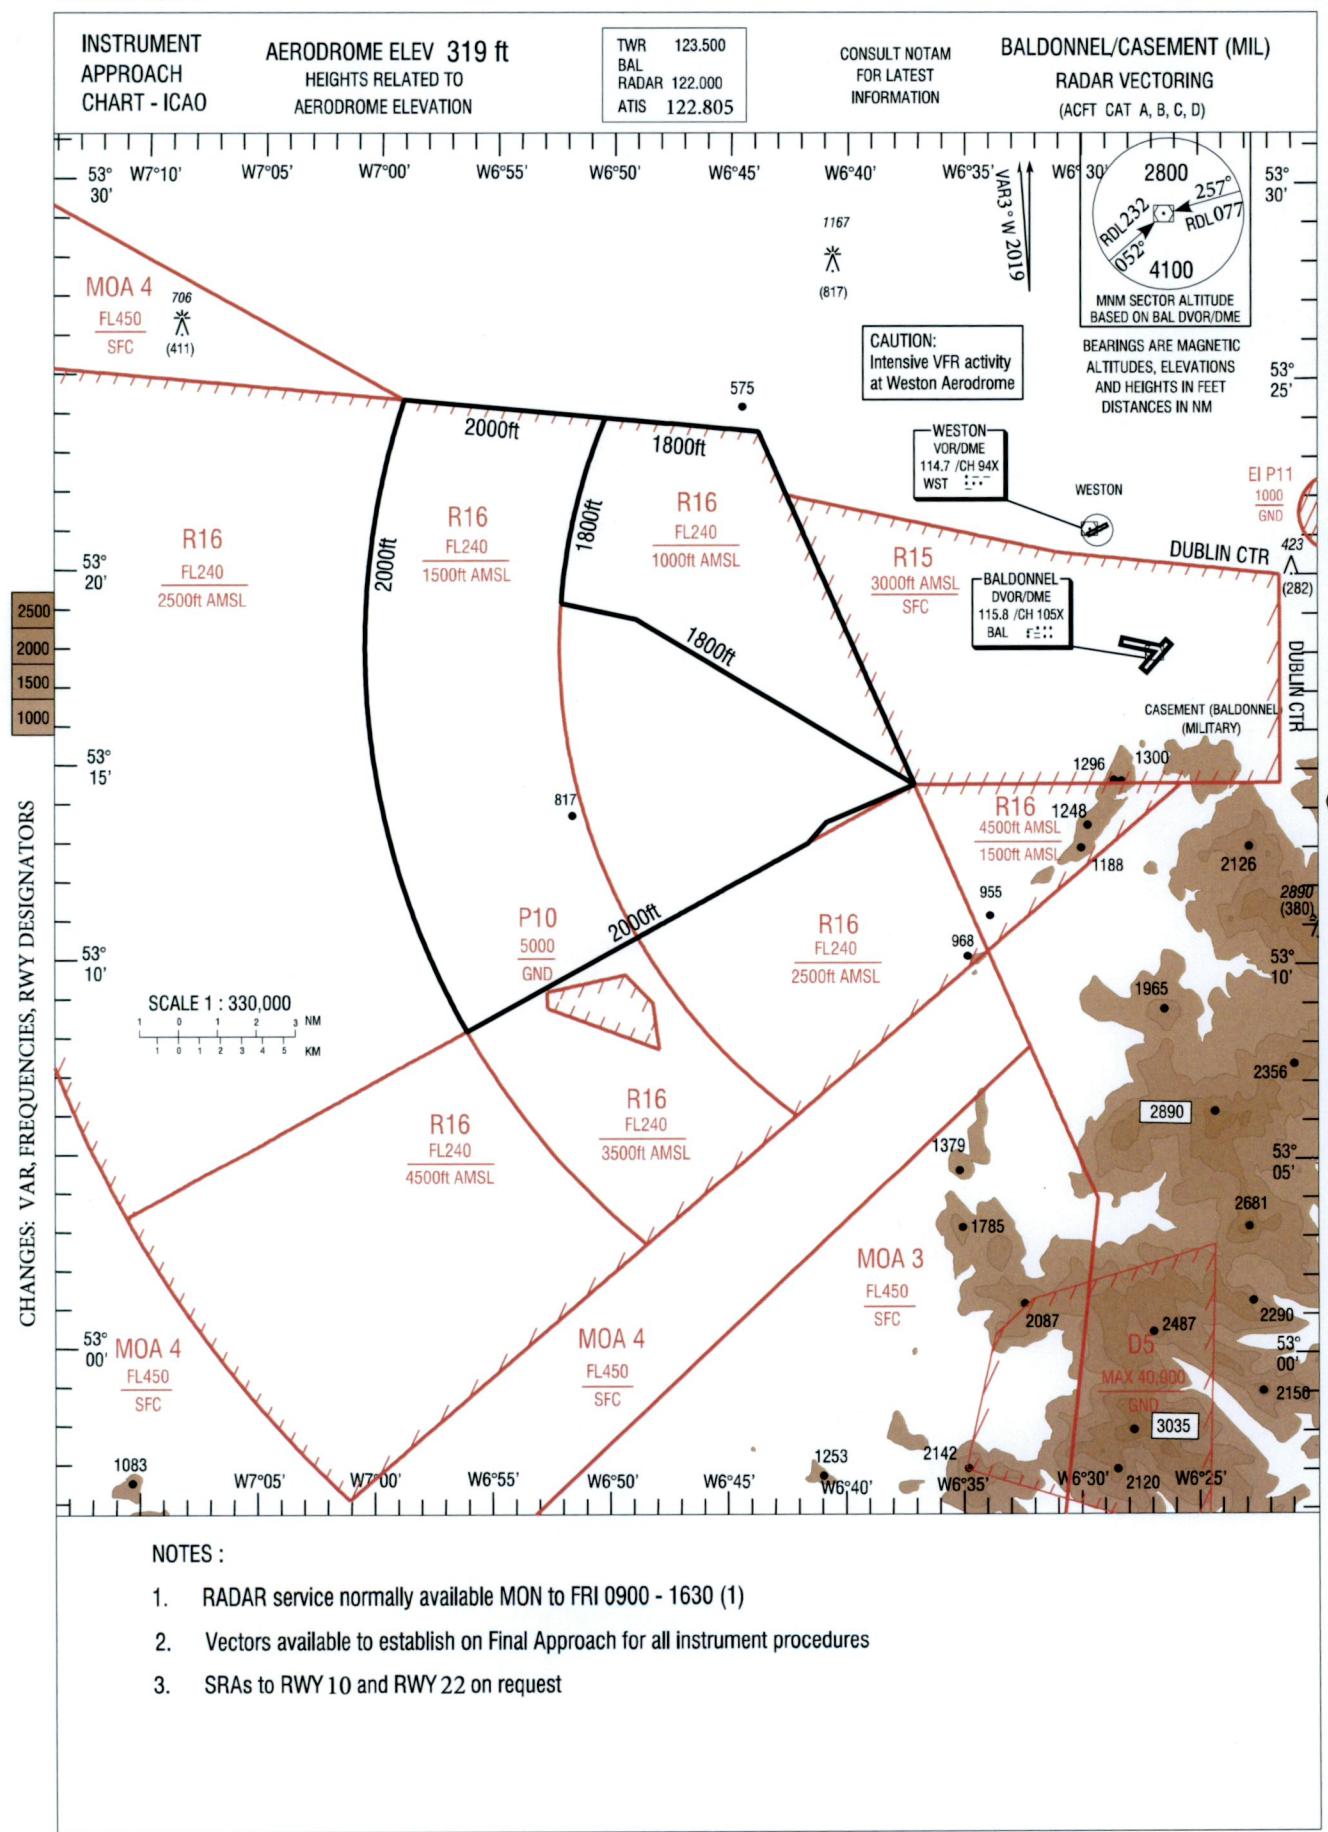

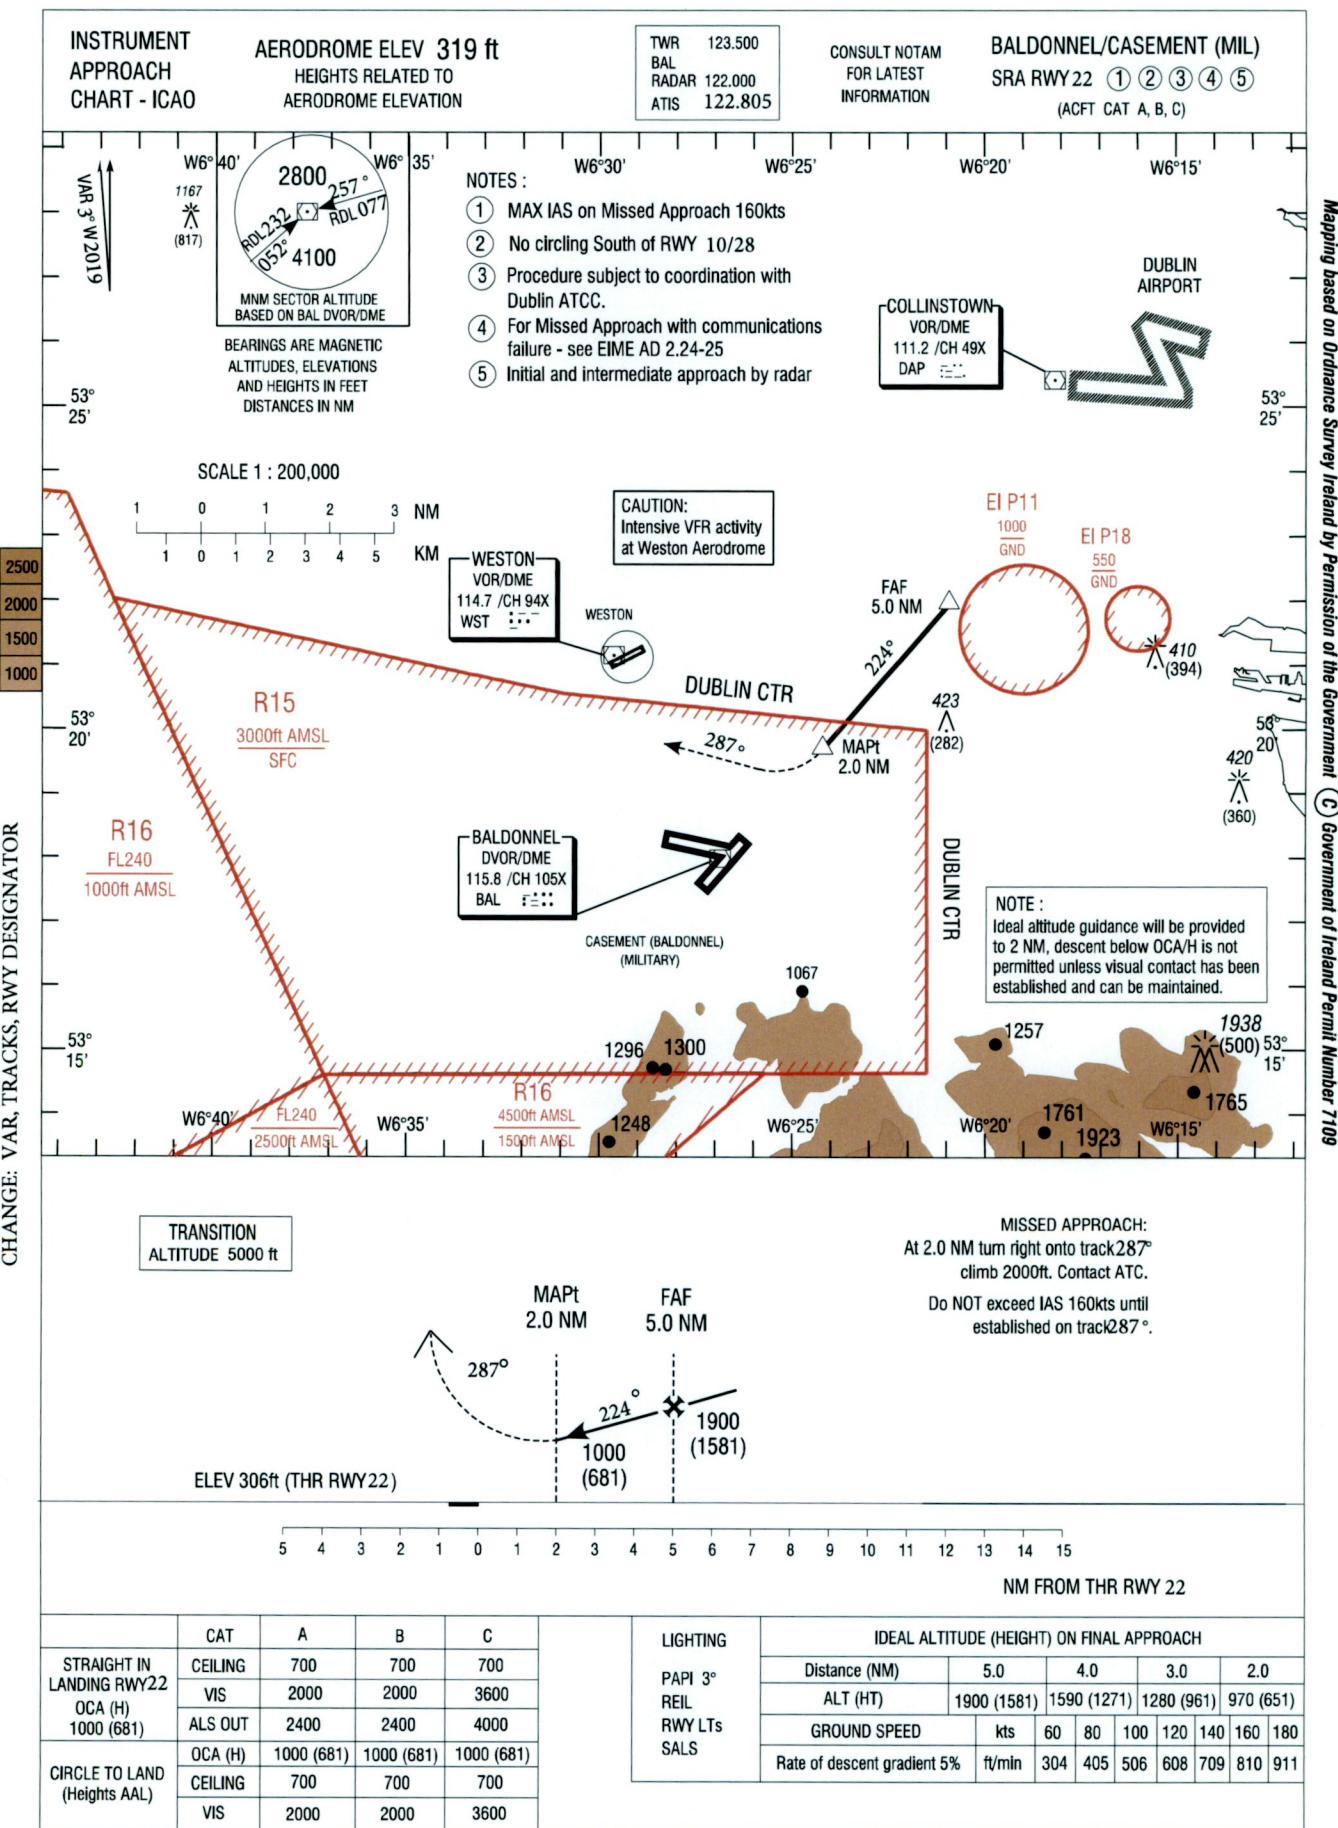

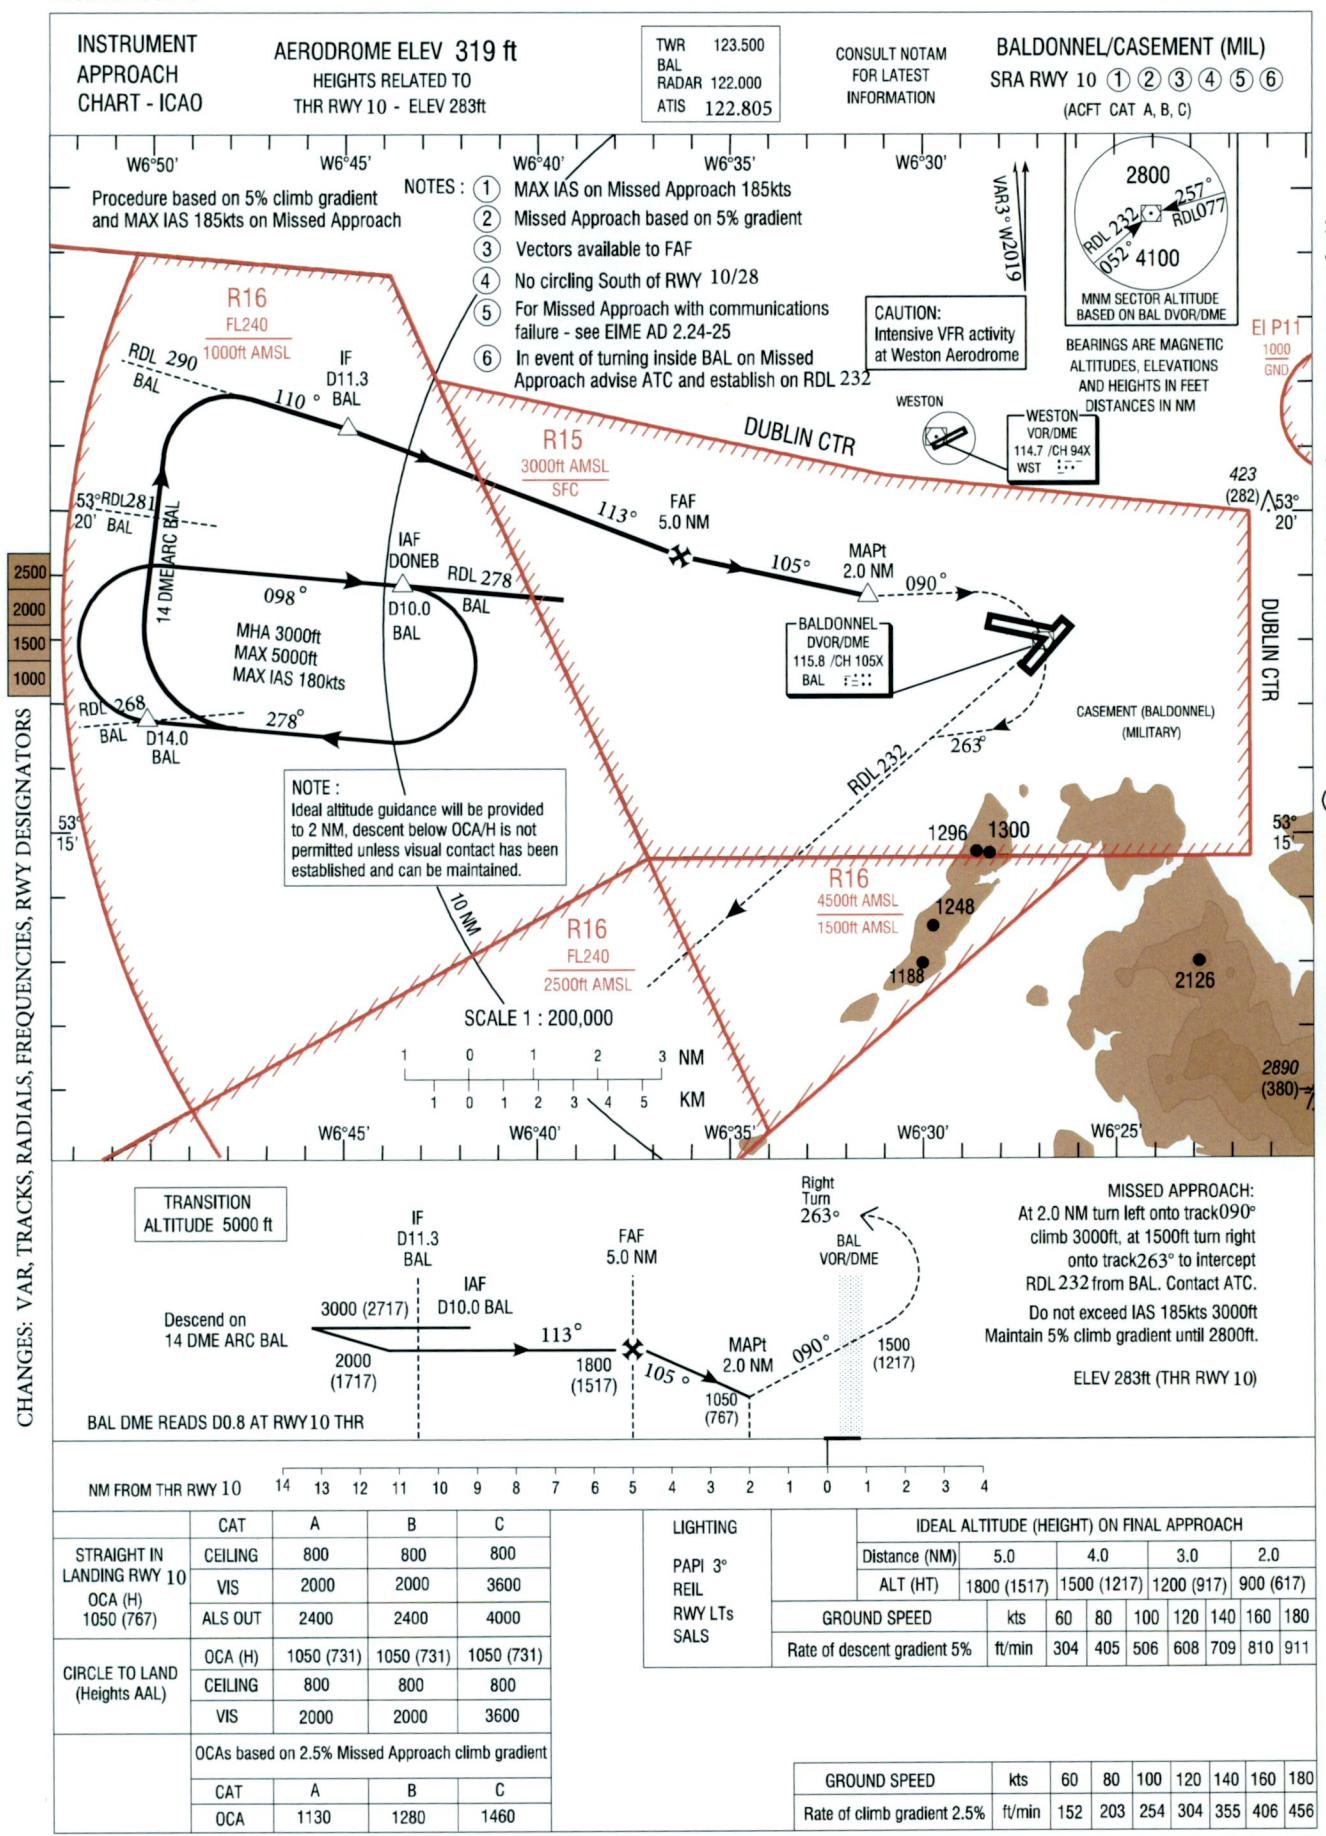

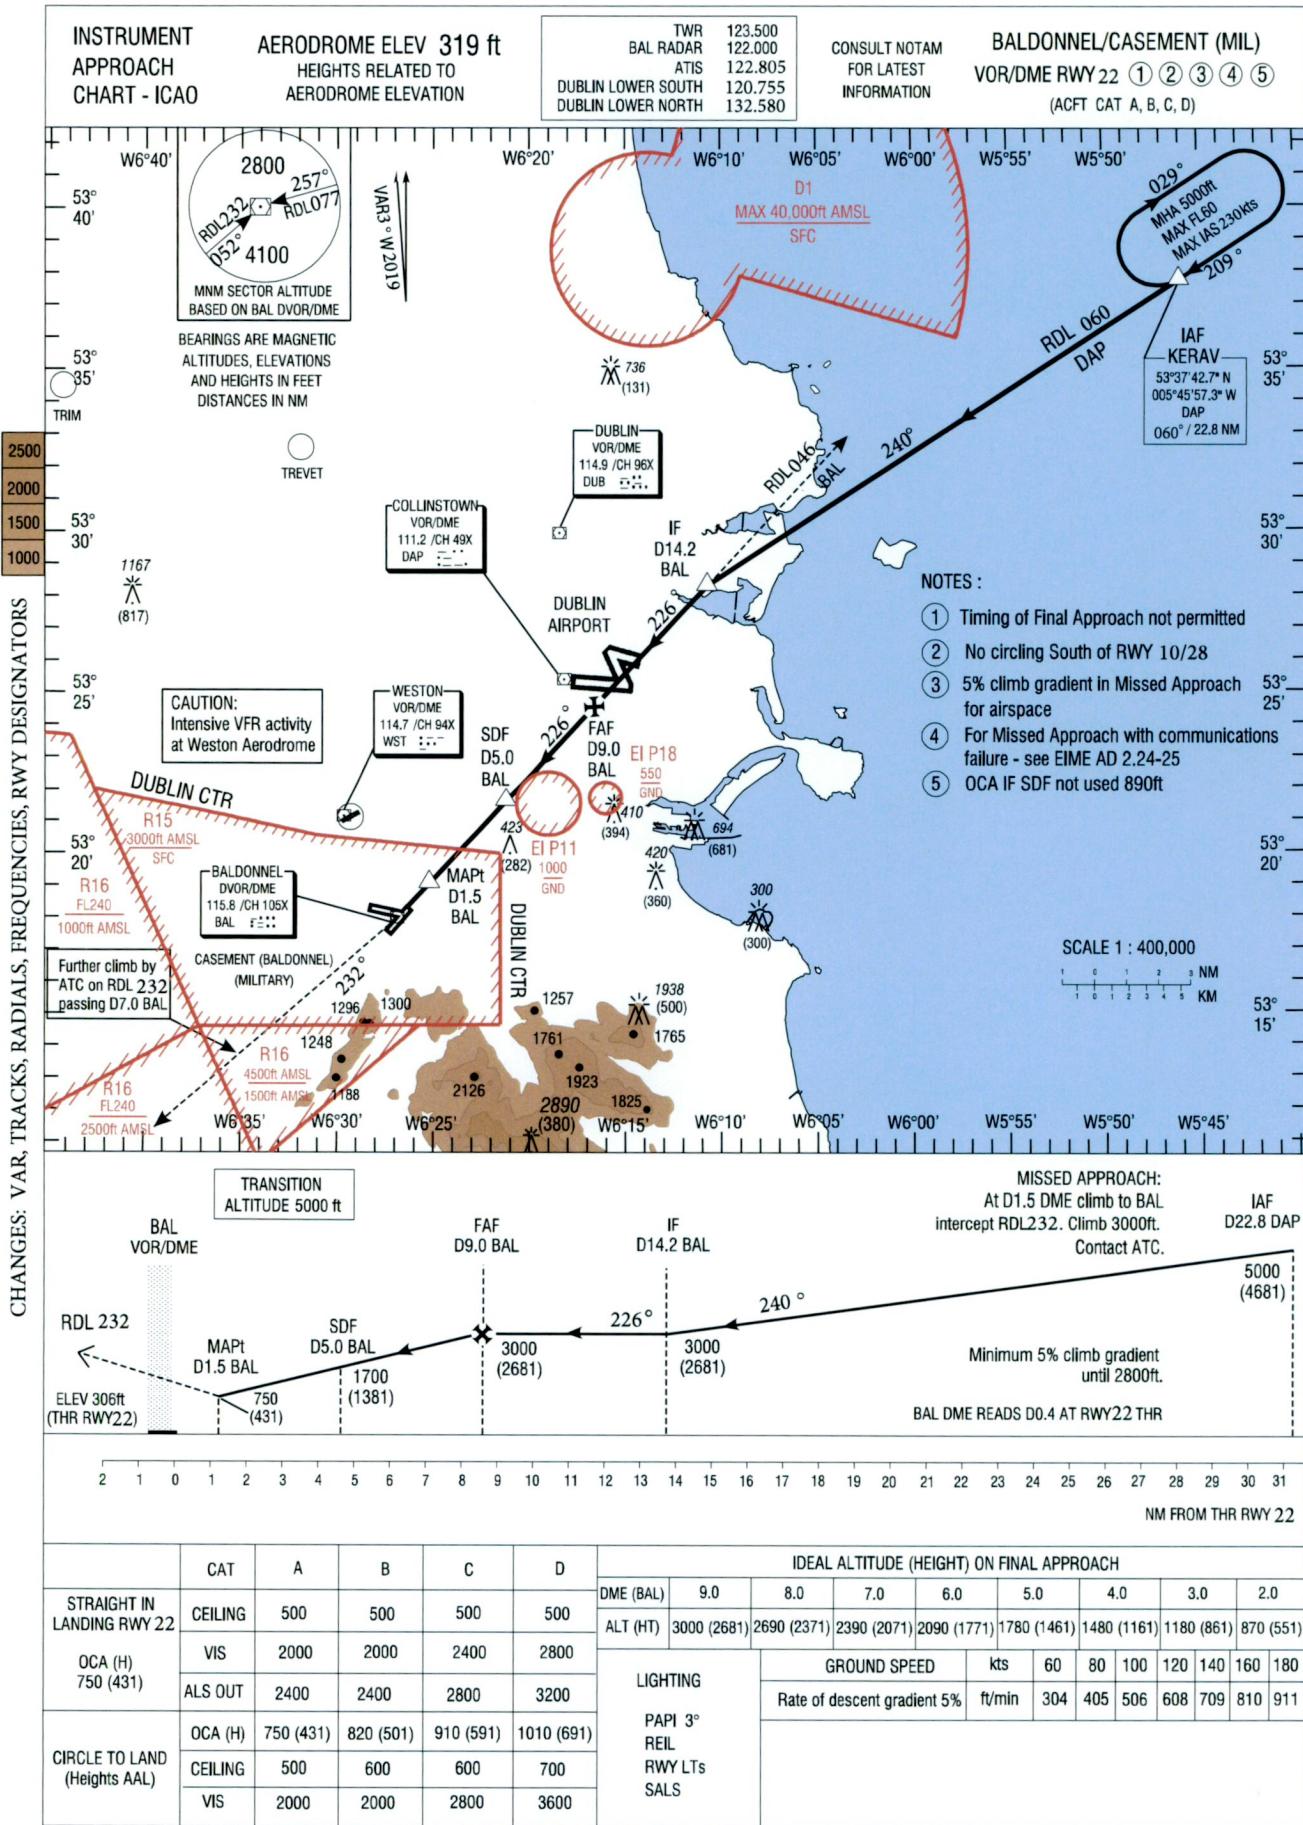

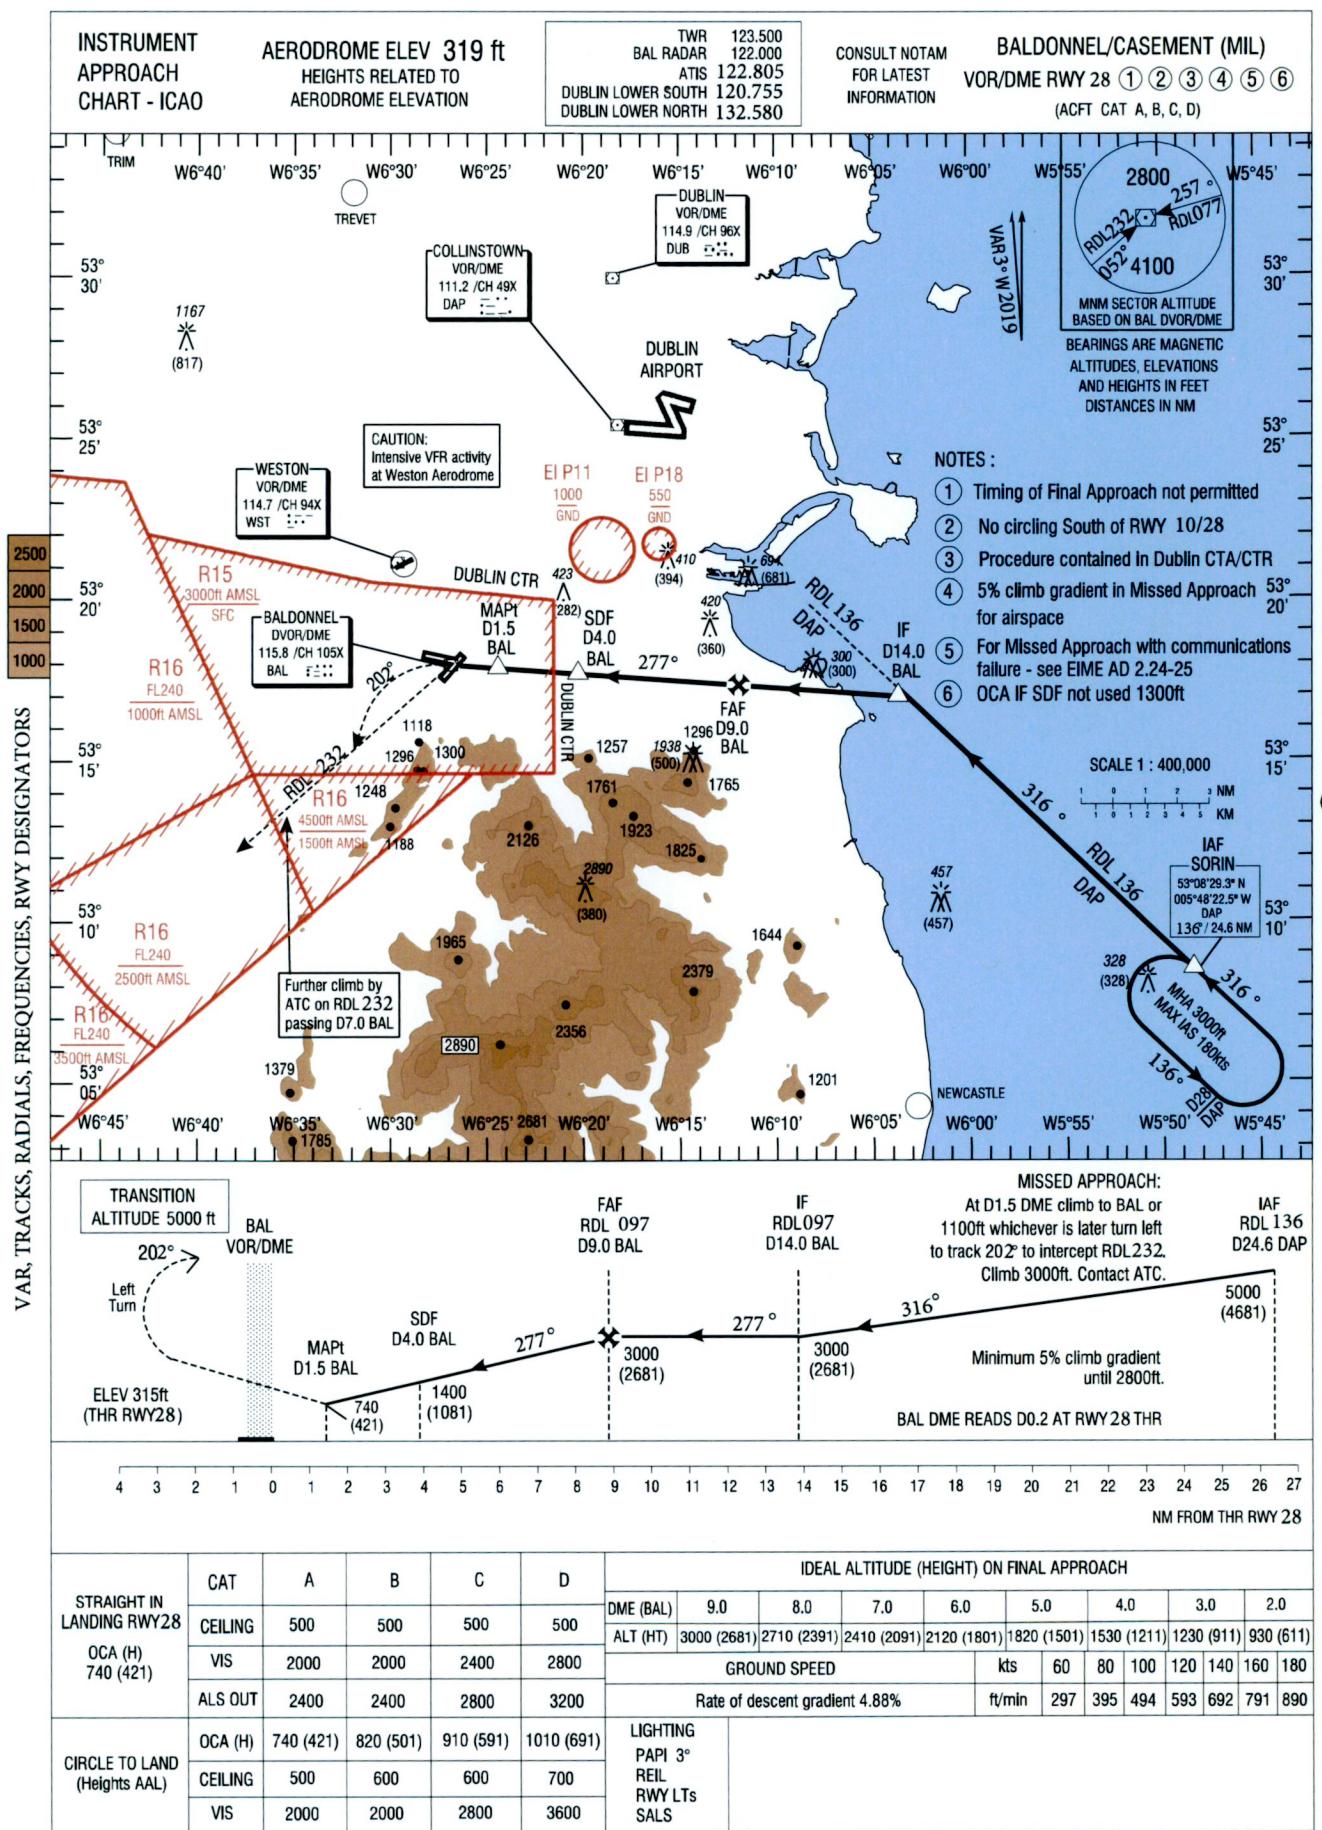

INSTRUMENT APPROACH CHART - ICAO

AERODROME ELEV 319 ft
HEIGHTS RELATED TO THR RWY 10 - ELEV 283ft

TWR 123.500
BAL
RADAR 122.000
ATIS 122.805

CONSULT NOTAM FOR LATEST INFORMATION

BALDONNEL/CASEMENT (MIL)
VOR/DME RWY 10 ① ② ③ ④ ⑤
(ACFT CAT A, B, C, D)

NOTES :

- MAX IAS on Missed Approach 185kts
- Missed Approach based on 5% gradient
- Timing of Final Approach not permitted
- No circling South of RWY 10/28
- For Missed Approach with communications failure - see EIME AD 2.24-25

CAUTION: Intensive VFR activity at Weston Aerodrome

W6°50' **W6°45'** **W6°40'** **W6°35'** **W6°30'** **W6°25'**

Procedure based on 5% climb gradient and MAX IAS 185kts on Missed Approach

R16 FL240 1000ft AMSL
IF D11.3 BAL
IAF DONEB D10.0 BAL
FAF D6.3 BAL
MAPT D1.7 BAL
RDL 232 05° 4100

MHA 3000ft MAX 5000ft MAX IAS 180kts
14 DME ARC BAL
RDL 268 D14.0 BAL
278° 098° 110°

R15 3000ft AMSL SFC
D7.0 BAL
263° 1188 1248 1296 1300

DUBLIN CTR
BALDONNEL DVOR/DME 115.8 CH 105X BAL F:::

BEARINGS ARE MAGNETIC ALTITUDES, ELEVATIONS AND HEIGHTS IN FEET DISTANCES IN NM

EI P11
1000 GND

SCALE 1 : 200,000
1 0 1 2 3 4 5 NM KM

TRANSITION ALTITUDE 5000 ft

W6°45' **W6°40'** **W6°35'** **W6°30'** **W6°25'**

10 NM

W6°50' **W6°45'** **W6°40'** **W6°35'** **W6°30'** **W6°25'**

IF D11.3 BAL
FAF D6.3 BAL
MAPT D1.7 BAL
BAL VOR/DME
Right Turn 263°

Descend on 14 DME ARC BAL
3000 (2717) 2000 (1717) 2000 (1717) 110° 110° 110°

BAL DME READS D0.8 AT RWY 10 THR

Further climb by ATC on RDL232 passing D7.0 BAL


MISSSED APPROACH:
Initial climb 3000ft At D1.7 climb on track 110°, at 1500ft climbing to 3000ft, turn right onto track 263° to intercept BAL RDL 232 Contact ATC. Maintain 5% climb gradient until 2800ft. Do not exceed IAS 185kts in turn.
ELEV 283ft (THR RWY10)


NM FROM THR RWY 10	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	1	2	3	4
CAT	C	A	B	C	D														
Straight in Landing RWY 10	CEILING	500	500	500	500	LIGHTING	IDEAL ALTITUDE (HEIGHT) ON FINAL APPROACH												
OCA (H) 720 (437)	VIS	2000	2000	2400	2800	PAPI 3°	DME (BAL)	6.0	5.0	4.0	3.0	2.0							
ALS OUT	2400	2400	2800	3200	REILS	ALT (HT)	1910 (1627)	1610 (1327)	1300 (1017)	1000 (717)	700 (417)								
CIRCLE TO LAND (Heights AAL)	OCA (H)	720 (401)	820 (501)	910 (591)	1010 (691)	RWY LTs	GROUND SPEED		kts	60	80	100	120	140	160	180			
	CEILING	500	600	600	700	SALS	Rate of descent gradient 5%	ft/min	304	405	506	608	709	810	911				
	VIS	2000	2000	2800	3600														
OCAs based on 2.5% Missed Approach climb gradient																			
CAT	C	A	B	C	D														
OCA	1000	1230	1400	1420	GROUND SPEED	kts	60	80	100	120	140	160	180						
					Rate of climb gradient 2.5%	ft/min	152	203	254	304	355	406	456						


CHANGE: MAGVAR, TRACKS AND RADIALS, RUNWAY DESIGNATORS, PROCEDURE NAME, ATIS FREQUENCY


Approved by GOC Air Corps

31 DEC 2020

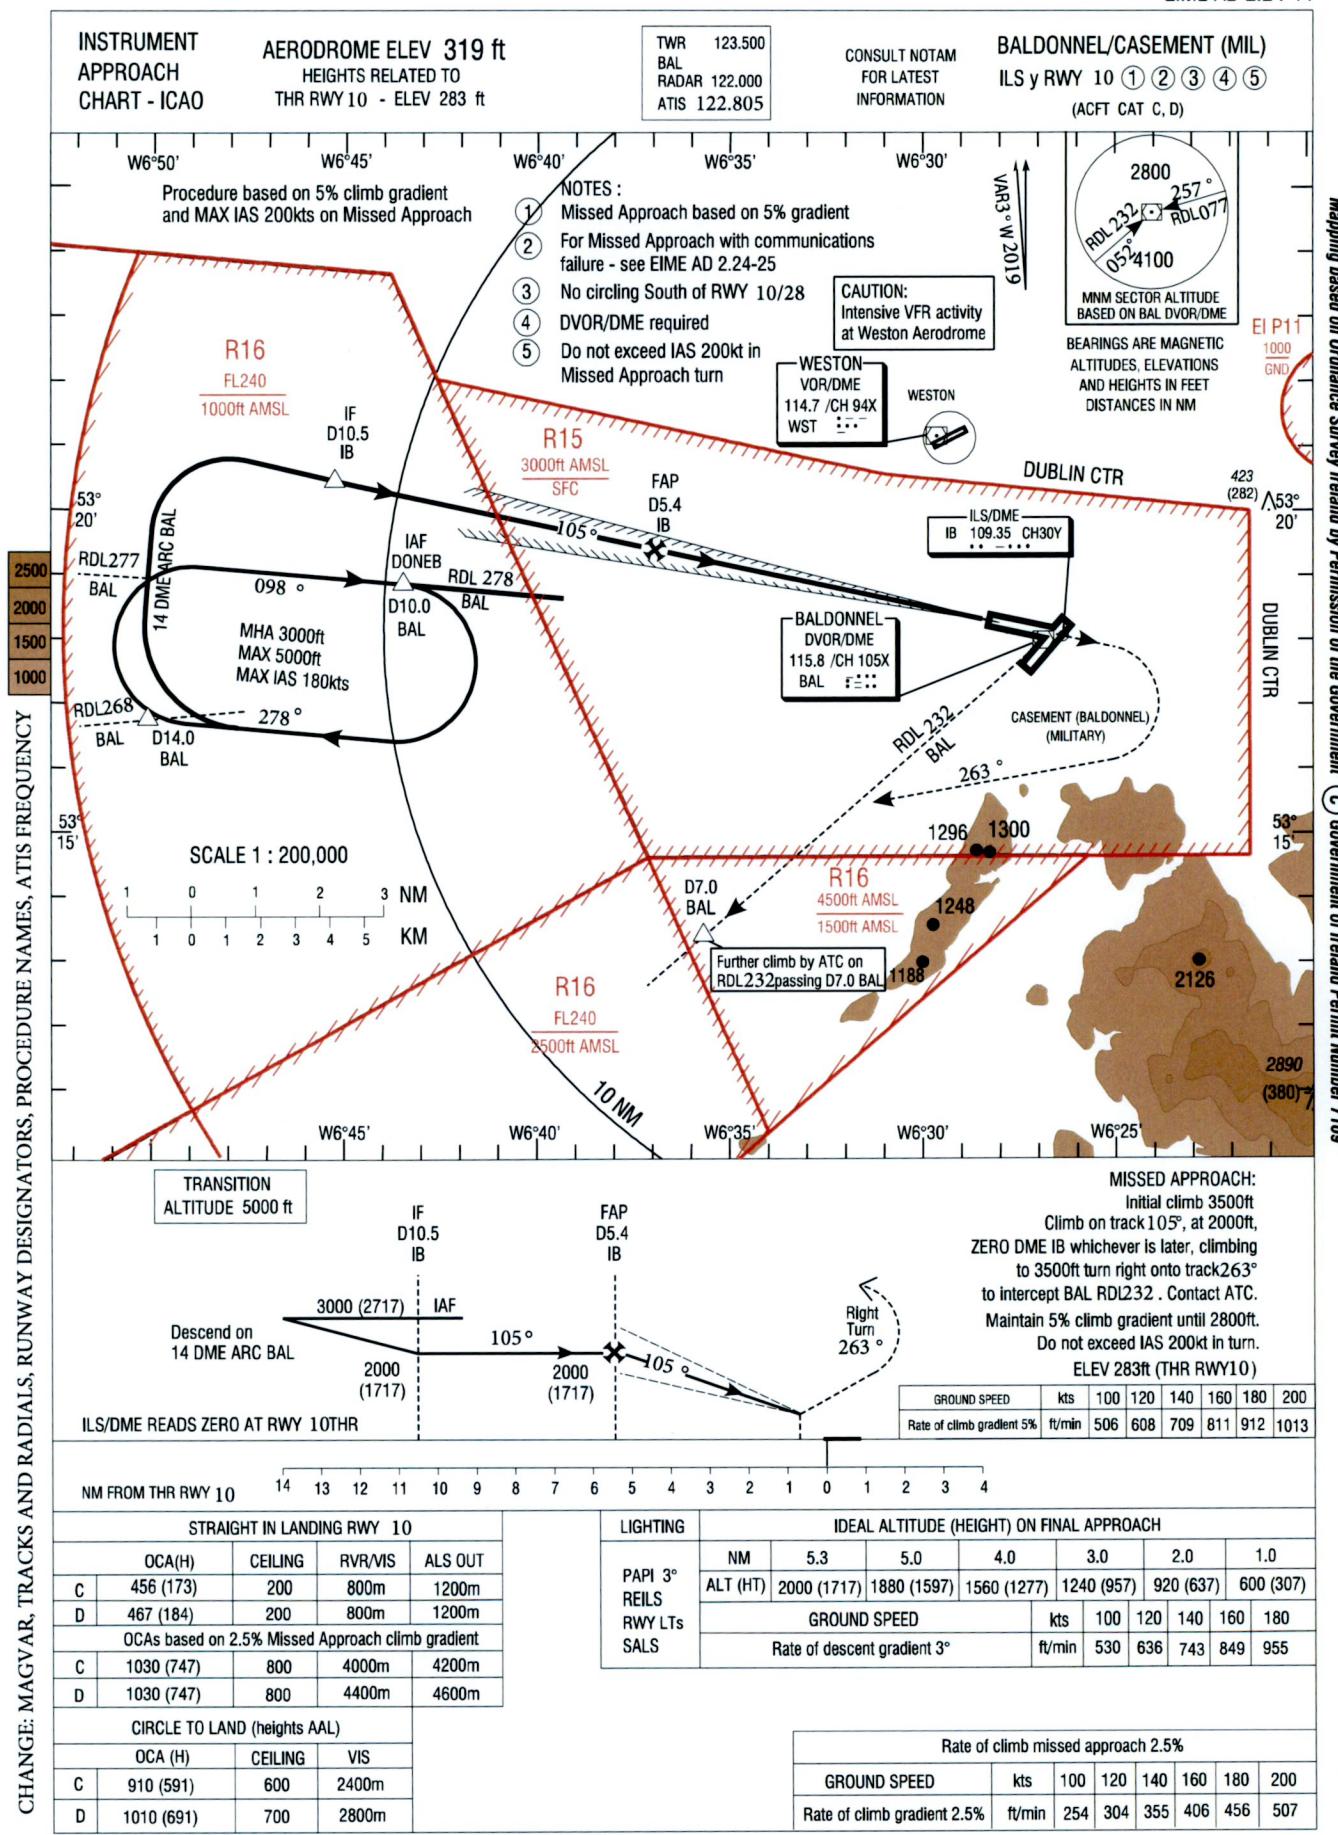

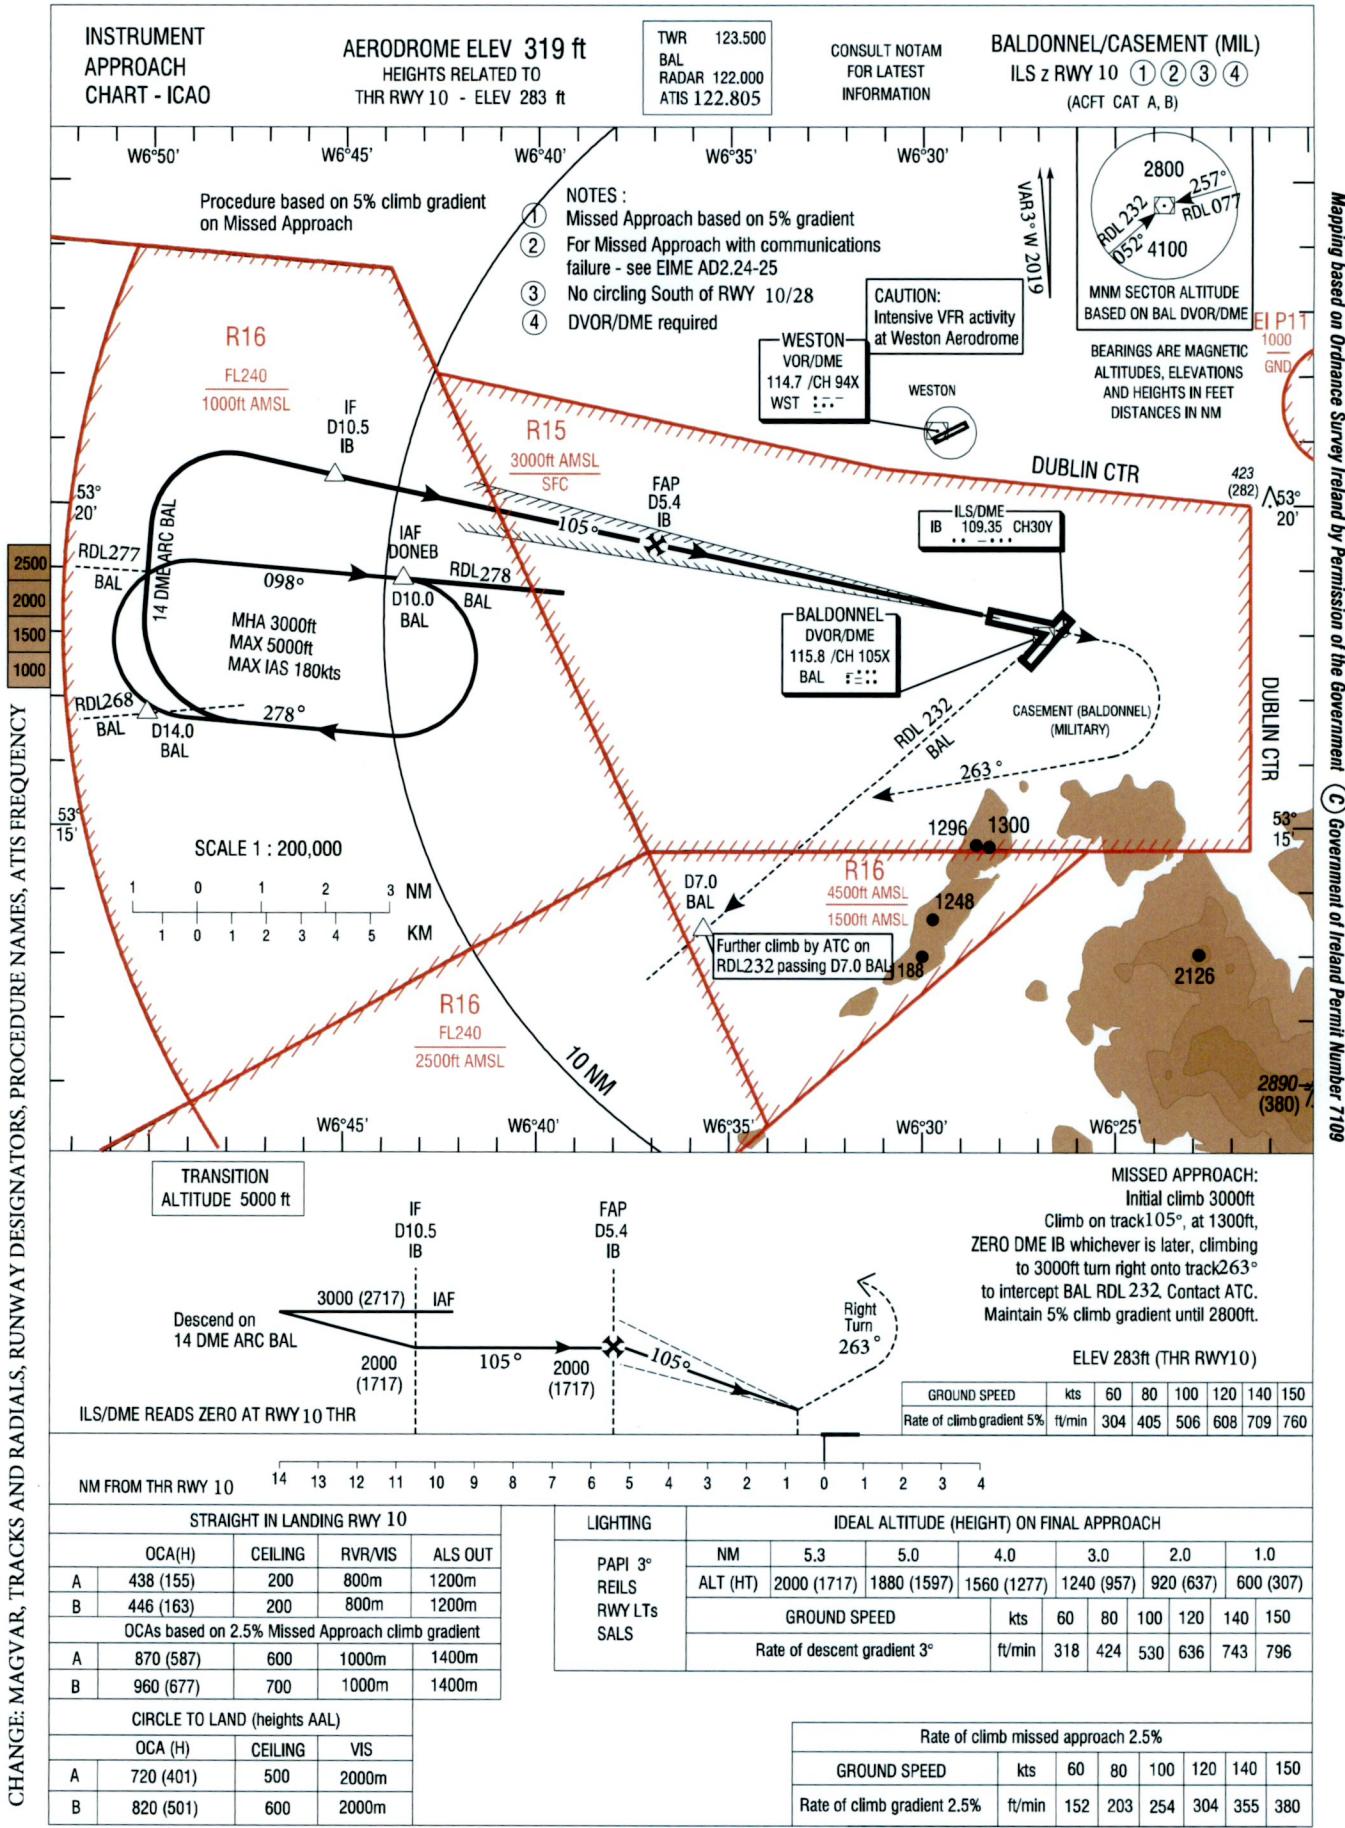


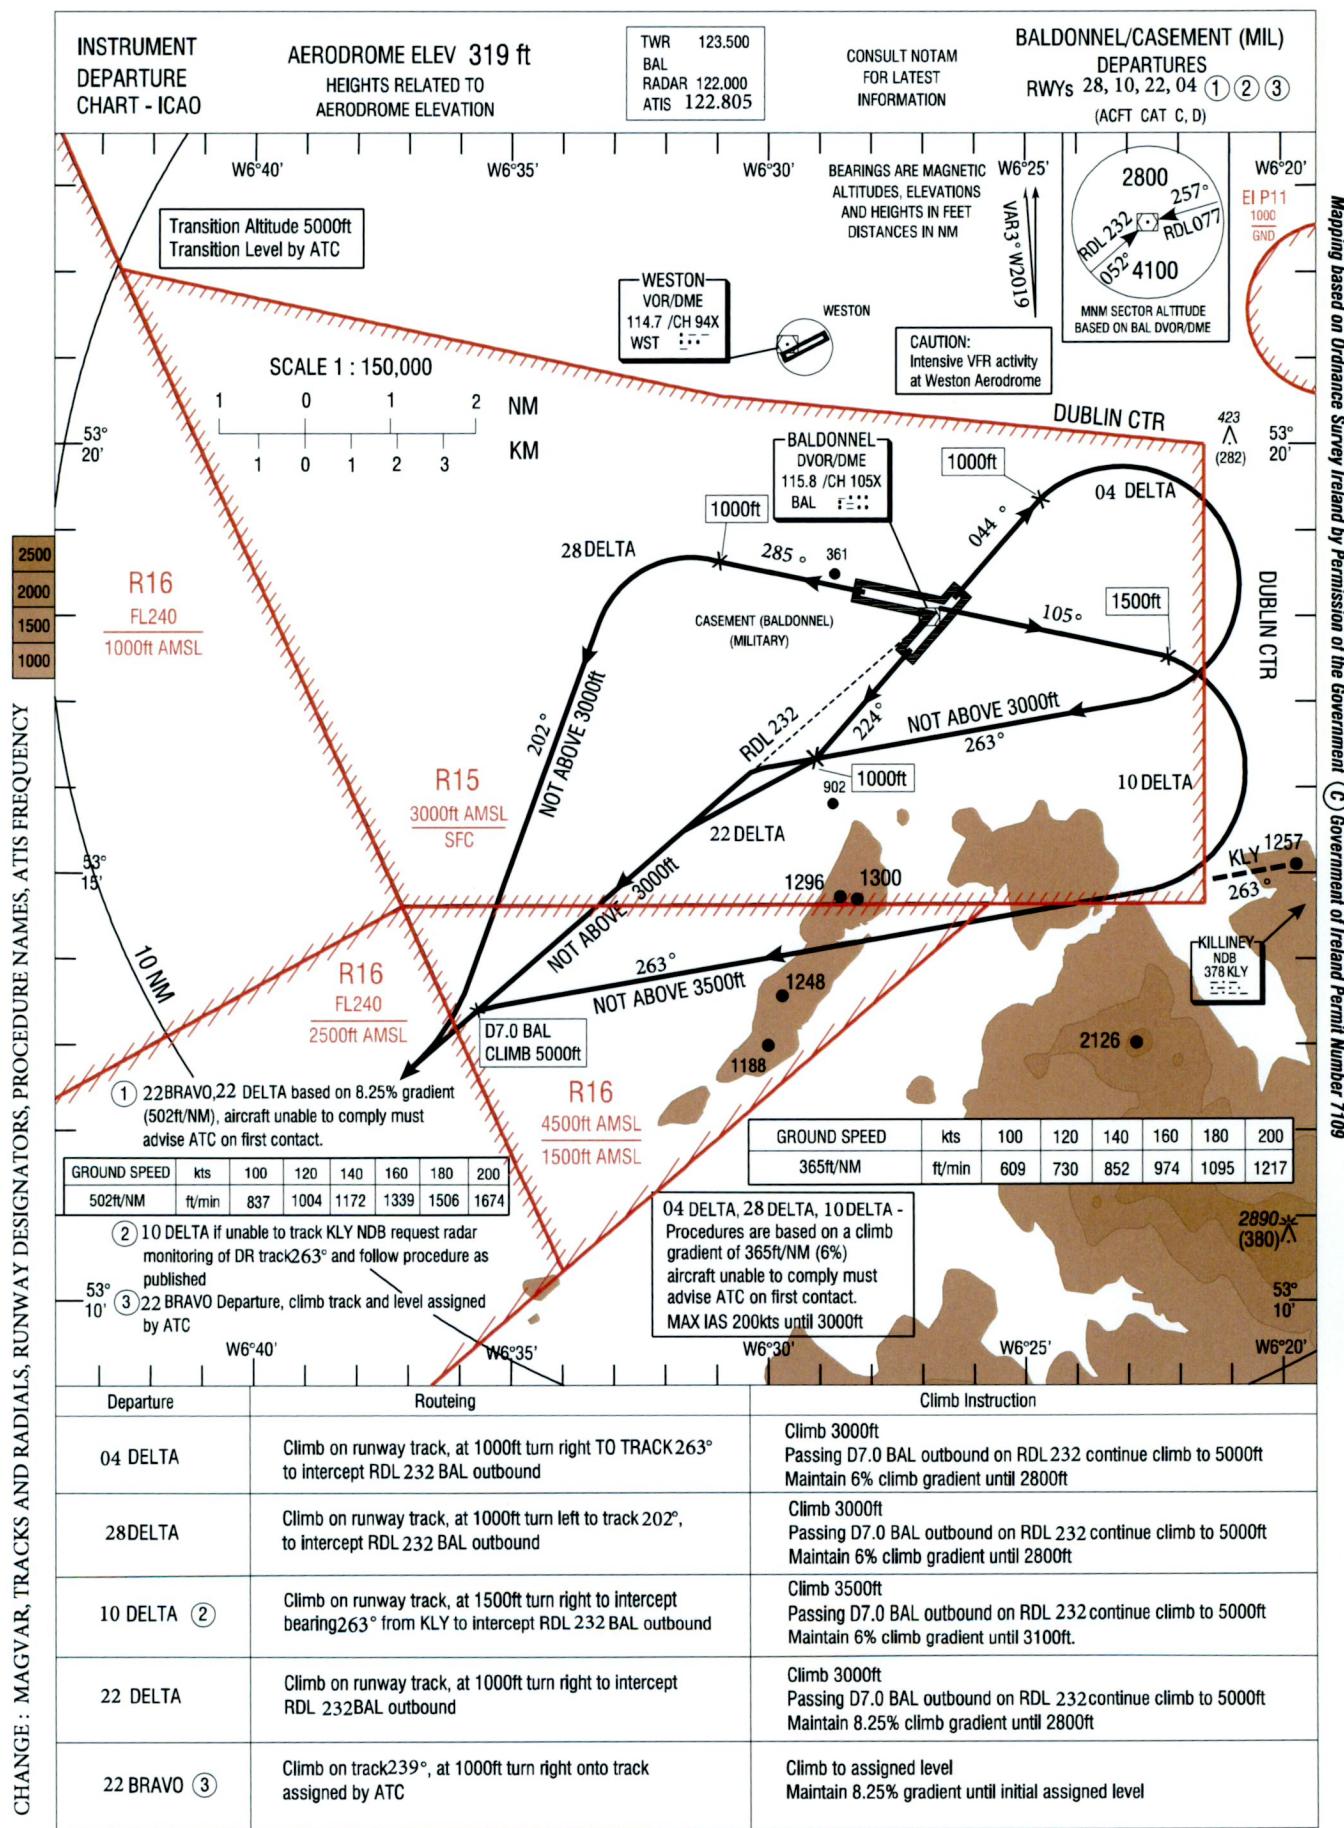

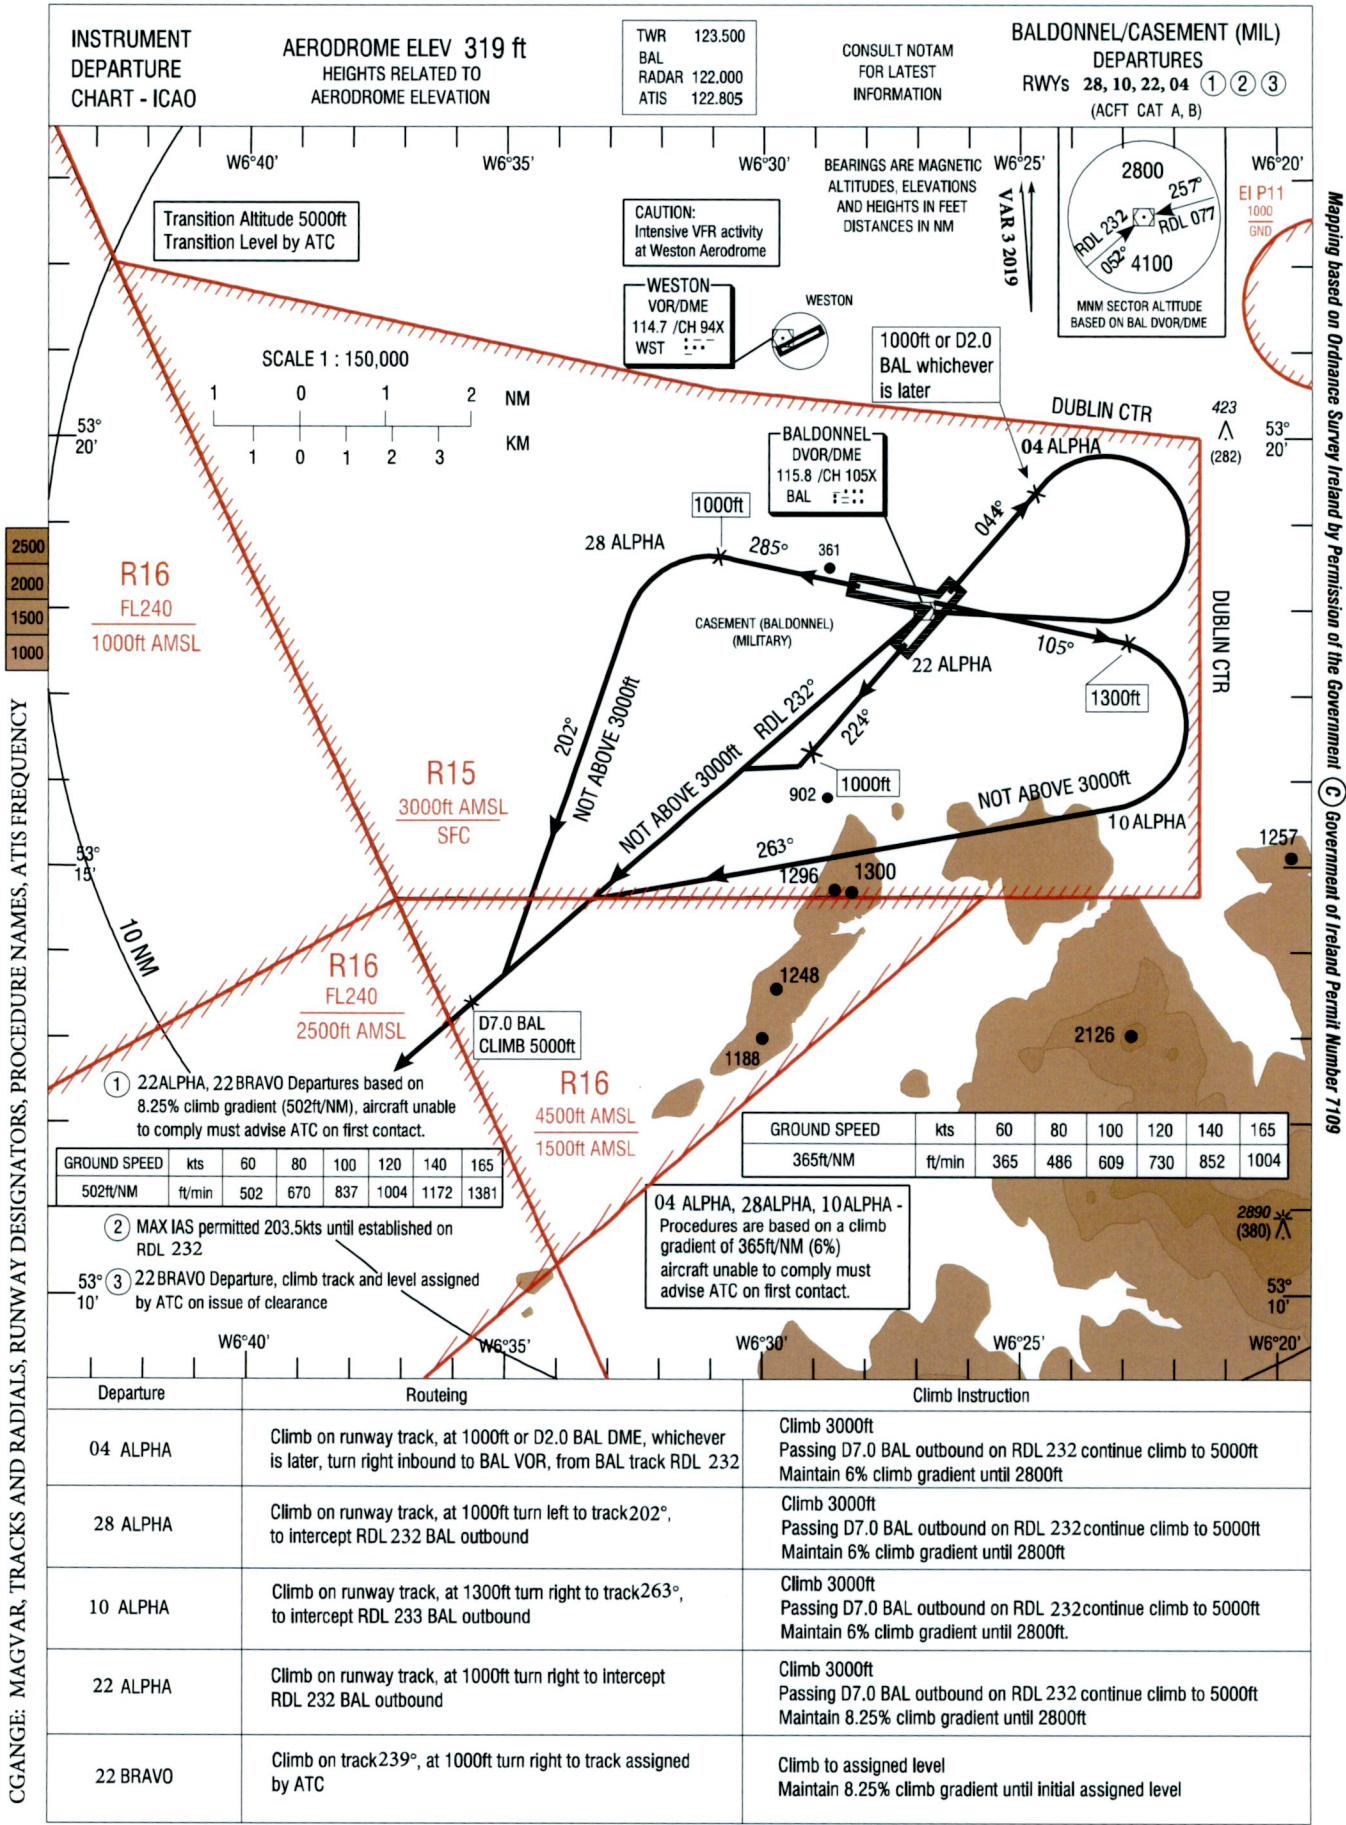


AERODROME CHART N 53°18'10.77" ELEV 319ft TWR 123.500
 ICAO W 006°27'19.46" GND 121.755 CONSULT NOTAM
 ATIS 122.805 FOR LATEST BALDONNEL/CASEMENT
 INFORMATION

RWY	DIRECTION	THR	BEARING STRENGTH	BEARINGS ARE MAGNETIC. ELEVATIONS SHOWN IN FEET AMSL. HEIGHTS IN FEET ABOVE AERODROME ELEVATION SHOWN IN BRACKETS. LINEAR DIMENSIONS IN METRES.
04	044°	N 53°17'36.90" W 006°27'13.73"	PCN 46/F/D/W/T	
10	105°	N 53°18'16.88" W 006°28'07.75"	PCN 52/F/D/W/T	
22	224°	N 53°18'12.63" W 006°26'22.02"	PCN 46/F/D/W/T	
28	285°	N 53°18'05.85" W 006°26'40.68"	PCN 52/F/D/W/T	ANNUAL RATE OF CHANGE -11' W

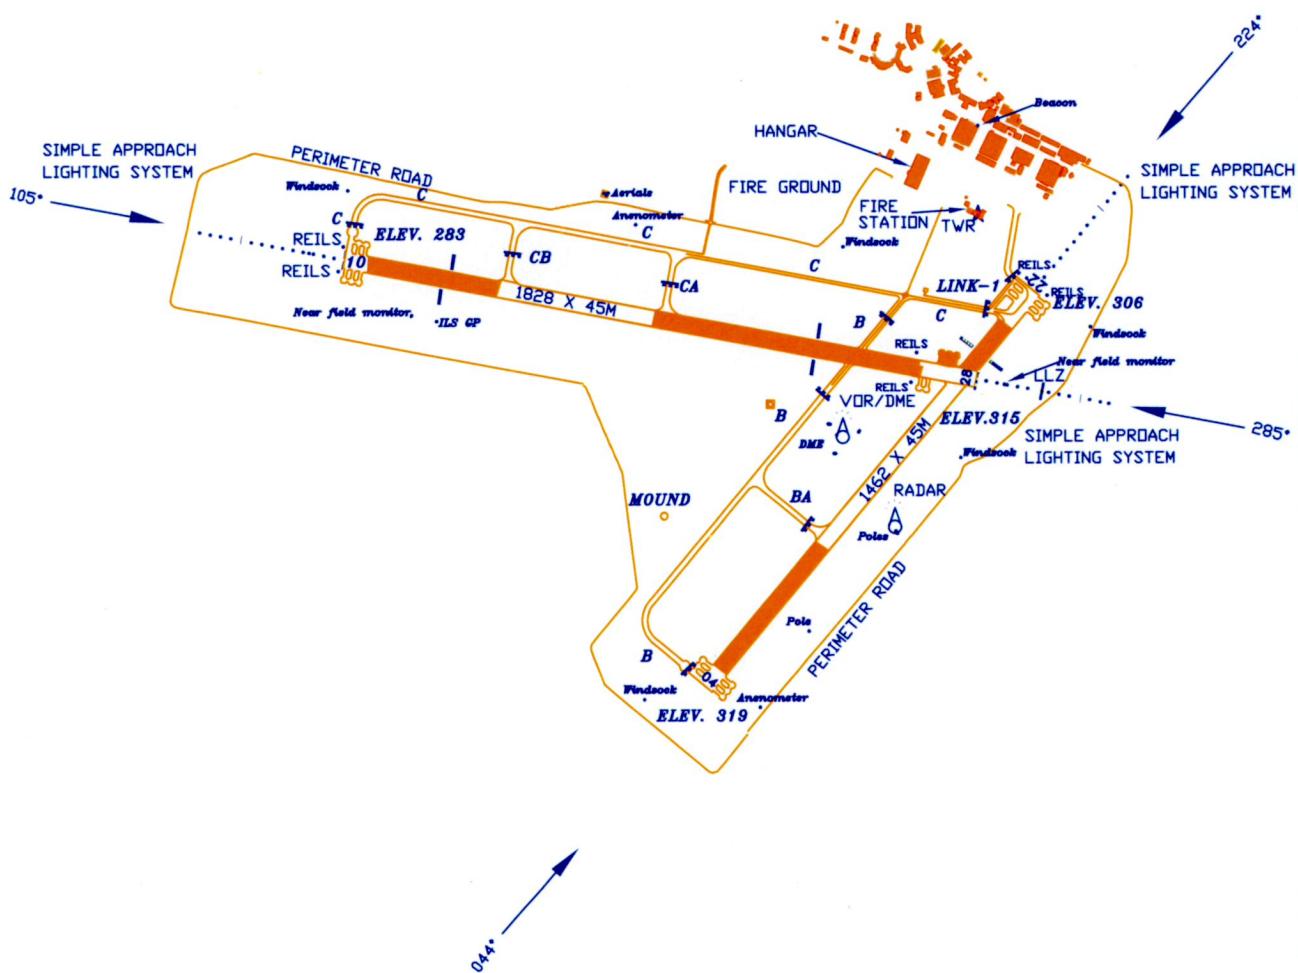

CHANGES : MAGNETIC VARIATION, BEARINGS, RUNWAY DESIGNATORS AND FREQUENCIES.

MARKING AIDS RWY 10/28



LIGHTING AIDS RWY 10/28







MARKING AIDS RWY 04/22



LIGHTING AIDS RWY 04/22



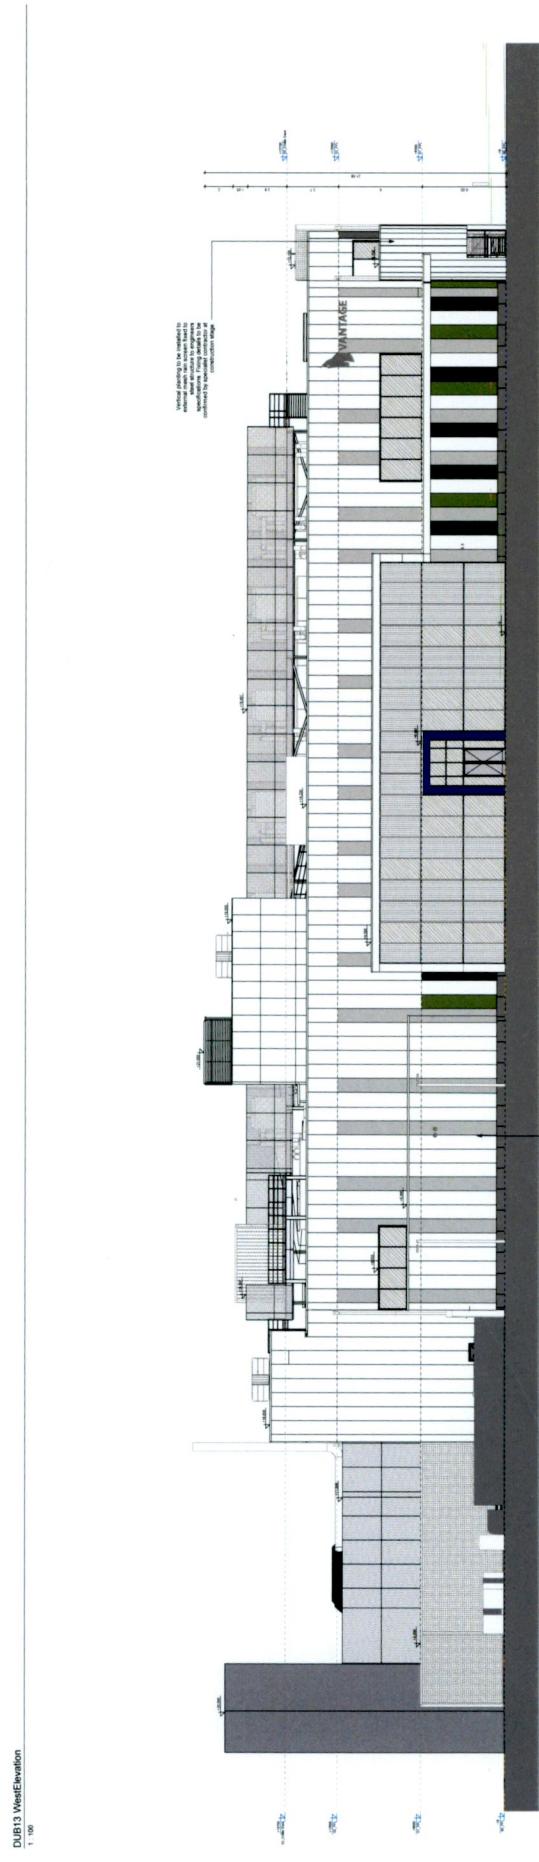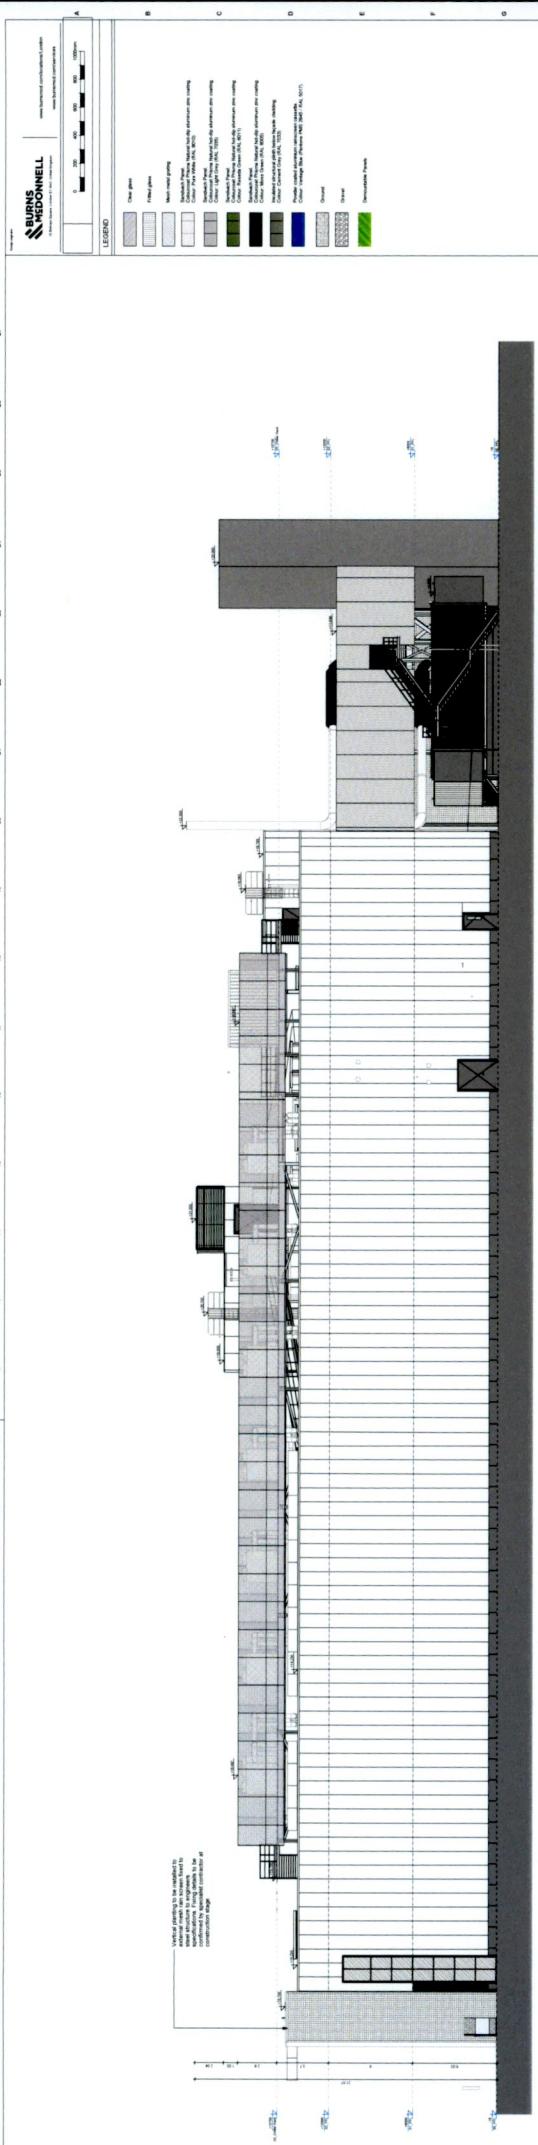

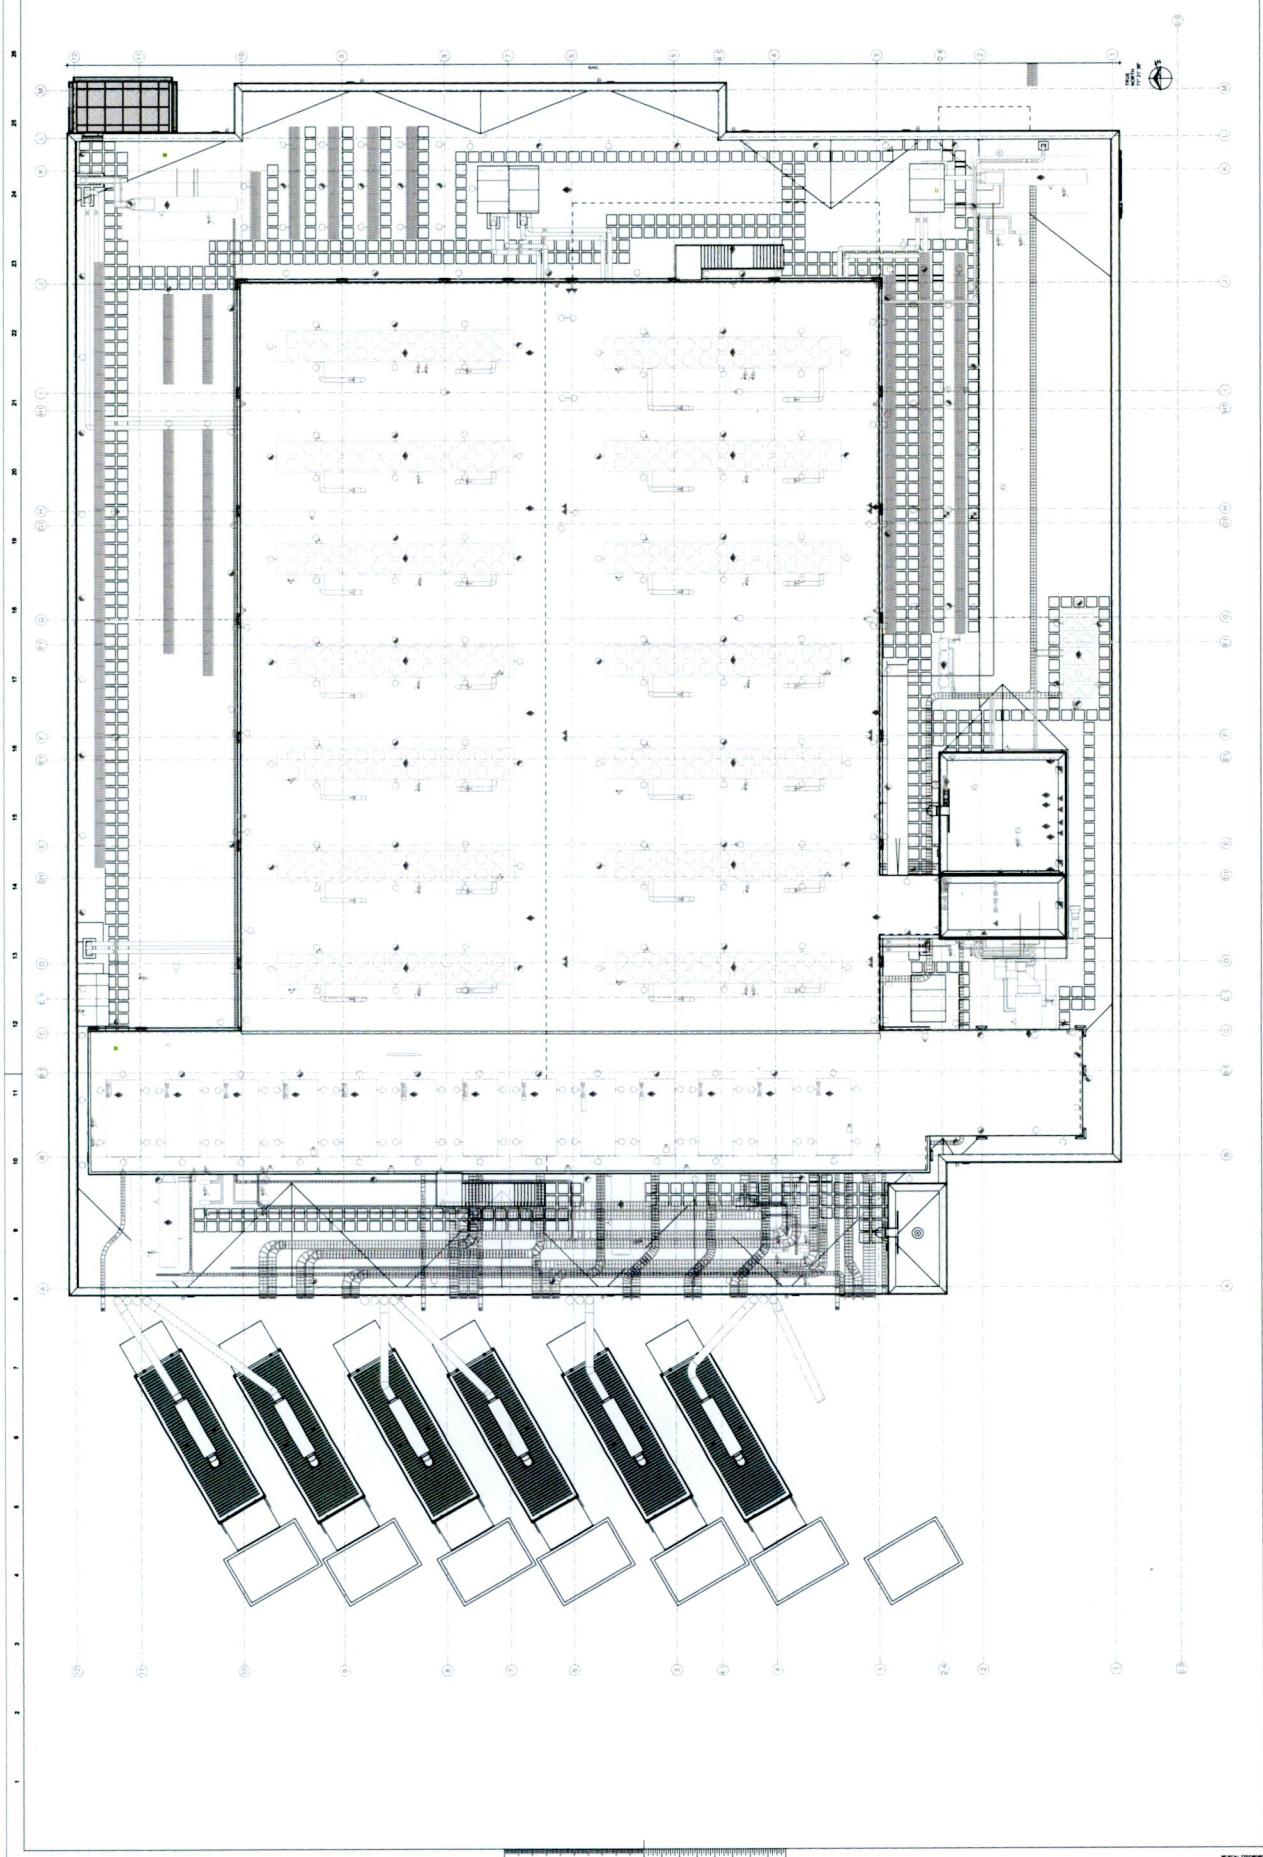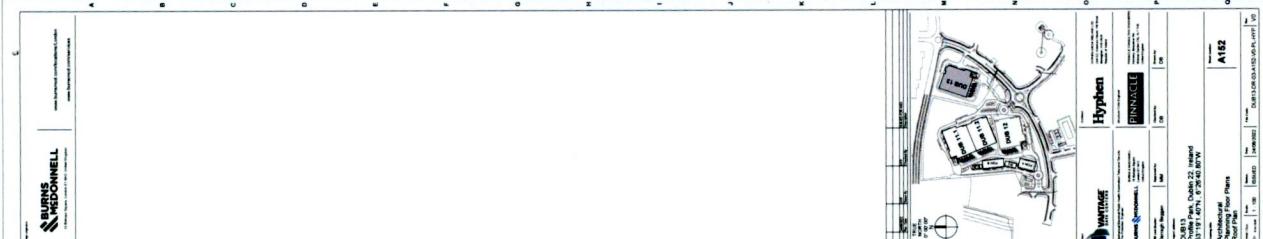



GLASGOW - HEAD OFFICE

Wright Business Centre, 1 Lonmay Road, Glasgow G33 4EL
T: 0141 773 6262
www.neo-environmental.co.uk

IRELAND OFFICE

-85 Bridge Street
Ballymena, Co. Antrim
Northern Ireland
BT43 5EN
0282 565 04 13

IRELAND OFFICE

Johnstown Business Centre
Johnstown House, Naas
Co. Kildare
T: 00 353 (0)45 844250
E: info@neo-environmental.ie

RUGBY OFFICE

Valiant Office Suites
Lumonics House, Valley Drive,
Swift Valley, Rugby,
Warwickshire, CV21 1TQ
T: 01788 297012

WARRINGTON OFFICE

Cinnamon House, Cinnamon Park
Crab Lane, Fearnhead
Warrington
Cheshire
T: 01925 661 716

Common Reflective Surfaces (in surrounding environments for PV systems)		Incident angle in degrees						
		0	15	30	45	60	75	90
Material Reflectivity (percent of incident light reflected)	Steel	36.73%	39.22%	46.34%	57.11%	70.02%	83.15%	94.40%
	Snow (fresh, flakey)	21.63%	23.09%	27.29%	33.63%	41.23%	48.96%	55.59%
	Standard Glass	8.44%	9.01%	10.65%	13.12%	16.09%	19.10%	21.69%
	Plexiglass	8.00%	8.54%	10.09%	12.44%	15.25%	18.11%	20.56%
	Plastic	6.99%	7.46%	8.82%	10.87%	13.33%	15.83%	17.97%
	Smooth Water	4.07%	4.35%	5.14%	6.33%	7.76%	9.22%	10.47%
	Solar Glass (high light transmission, low iron)	3.99%	4.26%	5.03%	6.20%	7.61%	9.05%	10.26%
	Solar Glass w/AR coating	2.47%	2.64%	3.12%	3.84%	4.71%	5.59%	6.35%

(Note: Index of refraction values may vary slightly depending on suppliers and reference documentation. The values for the above calculations are averages or single values obtained from the list of references for this document).

Important reference – “Stipples glass”: In addition to the superior refractive/reflective properties of solar glass versus standard glass, SunPower uses stippled solar glass for our modules. Stippled glass is used with high powered telescopes and powerful beacons and lights. The basic concept behind stippling is for the surfaces of the glass to be textured with small types of indentations. As a result, stippling allows more light energy to be channeled/ transmitted through the glass while diffusing the reflected lightenergy. This concept is why the reflection off a SunPower solar module will look hazy and less-defined than the reflection from standard glass, this occurs because the stippled SunPower glass is transmitting a larger percentage of light to the solar cell while breaking up the intensity of the reflected light energy.

SUMMARY/ACTION REQUIRED:

The studies, data and light beam physics behind the charts and graphs prove beyond a reasonable doubt that solar glass has less glare and reflectance than standard glass. The figures also make it clear that the difference is very decisive between solar glass and other common residential/commercial glasses. In addition, not to be lost in the standard light/glass equations and calculations, the SunPower solar glass is stippled and has a very photon-absorbent solar cell attached to the back side, contributing two additional factors which results in even less light energy being reflected.

SUNPOWER CORPORATION

Tech Note Title & Number: SunPower Solar Module Glare And Reflectance, *T09014

DATE: September 29, 2009

DMS #: 001-56700 Rev. **

REGIONAL CONTACTS:

EU Toll Free number: SunPower Technical Support, **00800-SUNPOWER (00800-78676937)**

- **For inquiries by e-mail, please use:**

- Spain: SunPower – Soporte Técnico España: soportetecnico@sunpowercorp.com
- Germany: SunPower – Technischer Support: technischersupport@sunpowercorp.com
- Italy: SunPower – Servizio Tecnico Italia: serviziotecnico@sunpowercorp.com
- France: SunPower – Support Technique France: supporttechnique@sunpowercorp.com

USA Toll Free number: SunPower Technical Support, **1-800-SUNPOWER (786-76937)**

- **For inquiries by e-mail, please use:** Technicalsupport@Sunpowercorp.com

Australia (Sunpower Corporation Australia PTY LTD) contact number: **+61-8-9477-5888.**

Korea – SPK (SunPower Korea) contact number: **(02) 3453-0941**

REFERENCES:

- Center for Sustainable Building Research. College of Dean – University of Minnesota. All rights Reserved. JDP activity by the University of Minnesota and Lawrence Berkeley National Laboratory
- H.K Pulker, Coatings on Glass, (1999), 2ed, Elsevier, Amsterdam
- C.G Granqvist, Materials Science for Solar Energy Conversion Systems, (1991), Pergamon, G.B
- D. Chen, anti-reflection (AR) coatings made by sol-gel processes: A review, Solar energy Materials and Solar Cells, 68, (2000), 313-336
- P. Nostell, A. Roos, B. Karlsson, Antireflection of glazings for solar energy applications, Solar Energy Materials and Solar Cells, 54, (1998), 23-233
- M. Fukawa, T. Ikeda, T. Yonedaans K. Sato, Antireflective coatings y single layer with refractive index of 1.3, Proceedings of the 3rd International Conference on Coatings on Glass (ICGG), (2000), 257-264
- J. Karlsson and A. Roos, Modeling the angular behavior of the solar energy transmittance of windows, Solar Energy, 69, 4, (2000)
- J. Karlsson, B. Karlsson and A. Roos, A Simple model for assessing the energy efficiency of windows, In Press, Energy and Buildings