


SECTION (Not to scale)

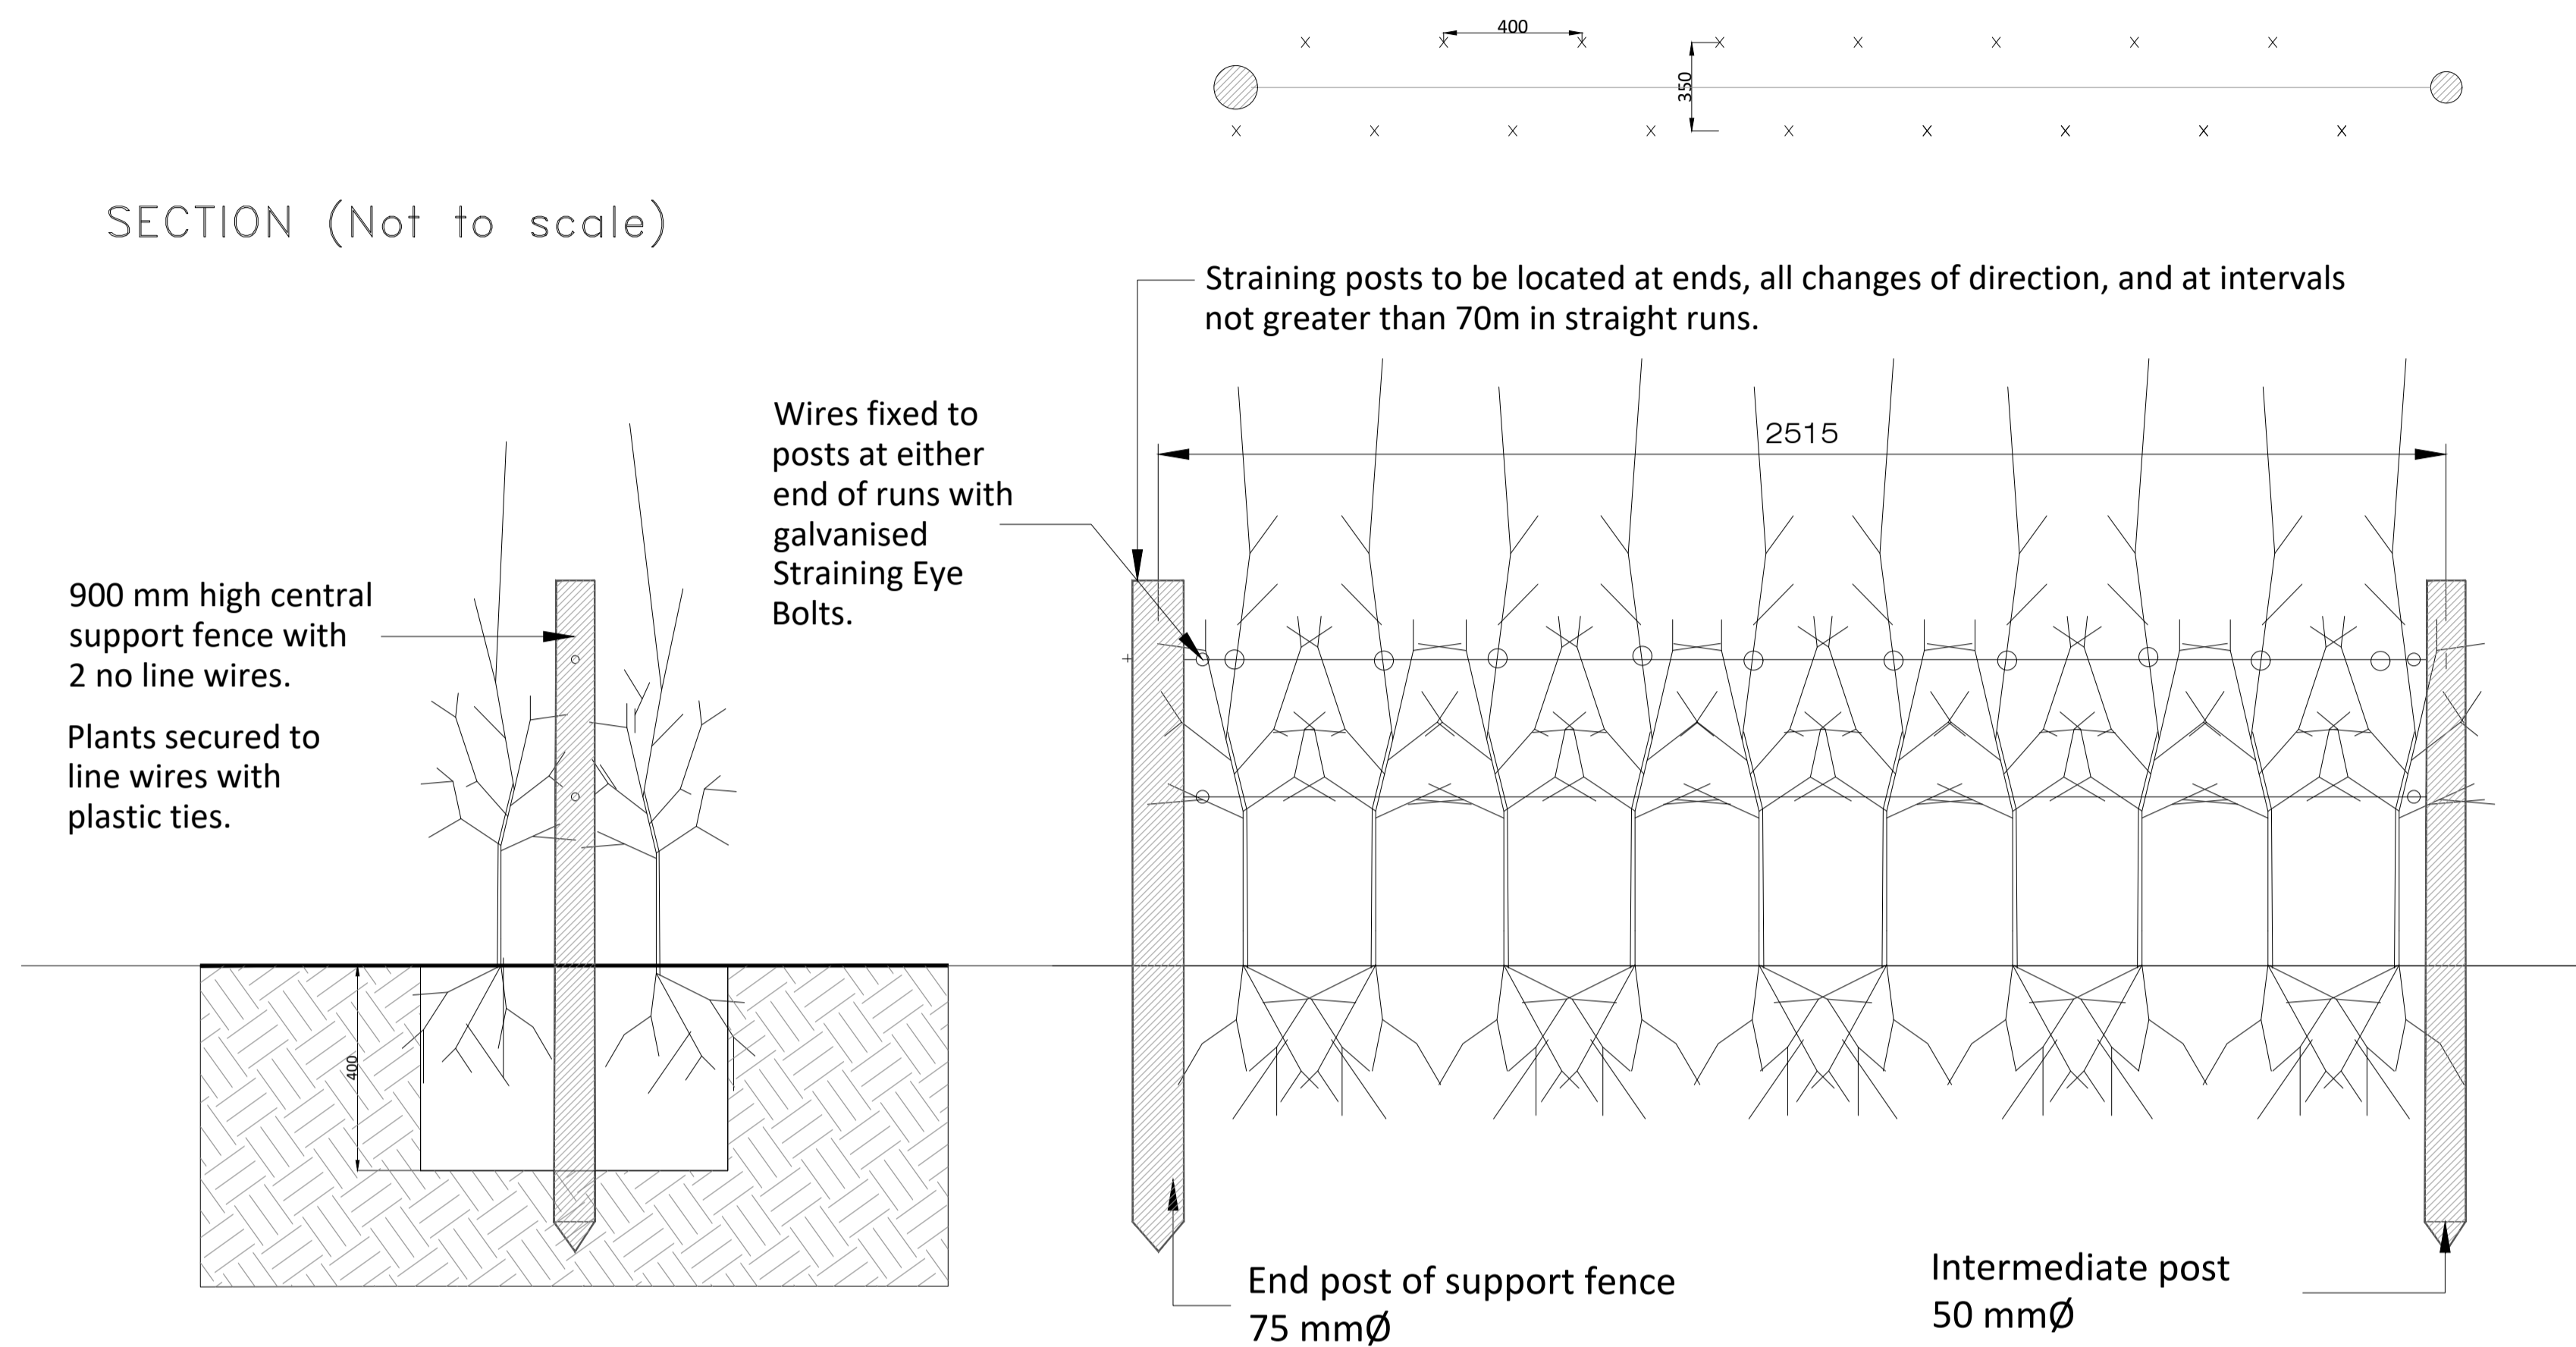

D9

HEDGE PLANTING

1. The hedge planting is to be carried out in a double trench, each dug 450 wide x 600mm deep to the required length.
 2. Mix the dug soil with a slow release fertiliser and an approved soil ameliorant.
 3. Break up the soil in the base of the trench.
 4. Place the plants in the trench in a double staggered row, 300mm between the rows, 400mm between the plants in each row, as shown.
 5. Backfill the trench to half its depth and firm by treading. Continue planting the trench.
 6. Once planted, backfill with the remaining soil and firm as before.
- In March cut the plants to within 1250mm high of the ground to encourage bushy growth from the base.

Notes

COPYRIGHT © ALL RIGHTS RESERVED.
THIS WORK IS COPYRIGHT AND CANNOT BE REPRODUCED OR COPIED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF THE ENGINEER.
DO NOT SCALE FROM THIS DRAWING. WORK ONLY FROM FIGURED DIMENSIONS.
THIS DRAWING TO BE READ IN CONJUNCTION WITH RELEVANT CONSULTANT'S DRAWINGS.

Ordnance Survey Ireland Licence No AR 0001321
© Ordnance Survey Ireland/Government of Ireland

Project Microsoft Dub 14/15 and CAB Building		Project No. 6816	
Orig. Planting Details (Sheet 4 of 4)		Drawing No. 531	Rev. 0
Scales N.T.S	Status Issued for Compliance	Date 22/01/2022	
Mountpleasant Business Centre, Ranelagh, Dublin D06 X7P8 Tel: +353(0)1 2081900		Dim. AP	Chd. Passed



Rev	Date	Drawn	Checked	Description
0	28/01/2022	AP	MM	Issued for Compliance