


Willington Grove

FMH

FDMH

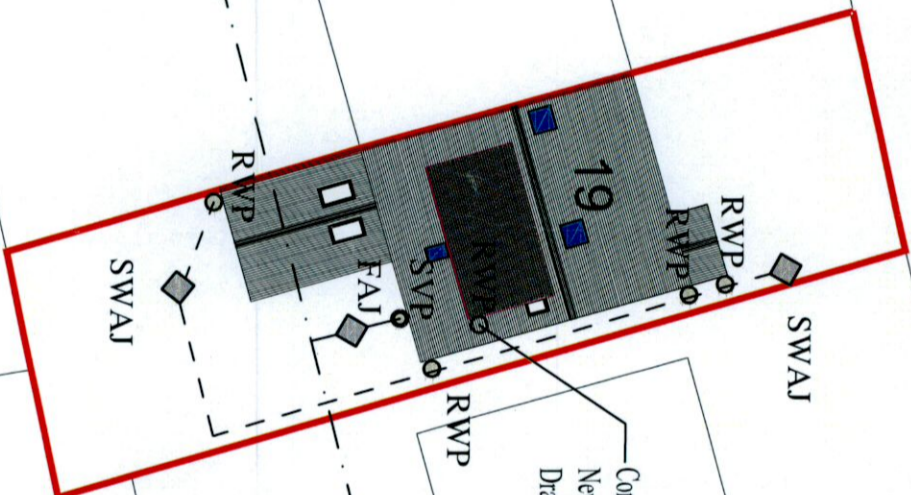

Connect Rain Water Run Of From New Roof Into Existing Surface Water Drainage System

**IMPORTANT NOTE:**  
ALL DRAINS TO BE 100mm PVC LAID ON CONCRETE BEDS 100mm DEEP AND TO A FALL OF NOT LESS THAN 1:80 WITH SIDE HONCHING HALFWAY UP PIPE. ALL DRAINS PASSING UNDER BUILDING TO BE ENCASED 150mm CONCRETE SURROUND AND BRIDGED WITH PRE-CAST AND PRE-STRESSED LINTELS WHERE THEY PASS UNDER BLOCKWORK WITH 50mm CLEARANCE AROUND PIPE AND PROTECTION AGAINST RODENT INFESTATION. ALL EXISTING DRAINS TO BE LOCATED ON SITE BEFORE WORKS COMMEANCE.

THIS DRAWING IS ISSUED FOR PLANNING ONLY, AND IS NOT A CONSTRUCTION DRAWING

ALL BUILDING WORK TO BE CARRIED OUT IN ACCORDANCE WITH ENGINEERS DETAILS & CURRENT BUILDING REGULATIONS

CONTRACTORS MUST VERIFY ALL DIMENSIONS ON SITE BEFORE COMMENCING ANY WORK. NO WORKING DIMENSIONS TO BE SCALED. DIMENSIONS TO BLOCKWORK ONLY. THIS DRAWING AND DESIGN IS COPYRIGHT AND IS THE PROPERTY OF JASON WALSH.

|      |                     |     |    |           |
|------|---------------------|-----|----|-----------|
| PL1  | Issued For Planning | JW  | JW | July 2022 |
| REV1 | REVISION TITLE      | DRW | CD | DATE      |

**APPLICANT:**  
Ronan Lyons

**Jason Walsh**  
Architectural & Engineering  
12 ARD MOR CRESCENT  
TALLAGHT  
DUBLIN 24  
PHONE: 085 8070 432  
EMAIL: G.JL.SERVICES@GMAIL.COM

**JOB TITLE**

Proposed Dormor Roof At  
19 Willington Grove,  
Templeogue,  
Dublin 6W.

**DRAWING TITLE**

Drainage Plan

|               |       |                   |          |             |            |
|---------------|-------|-------------------|----------|-------------|------------|
| <b>SCALE</b>  | 1:250 | <b>INITIALS</b>   | JW       | <b>DATE</b> | 23.07.2022 |
| <b>JOB No</b> | RL-22 | <b>DRAWING No</b> | RL-22-12 | <b>REV</b>  | PL1        |