





**LANDSCAPE DETAILS**

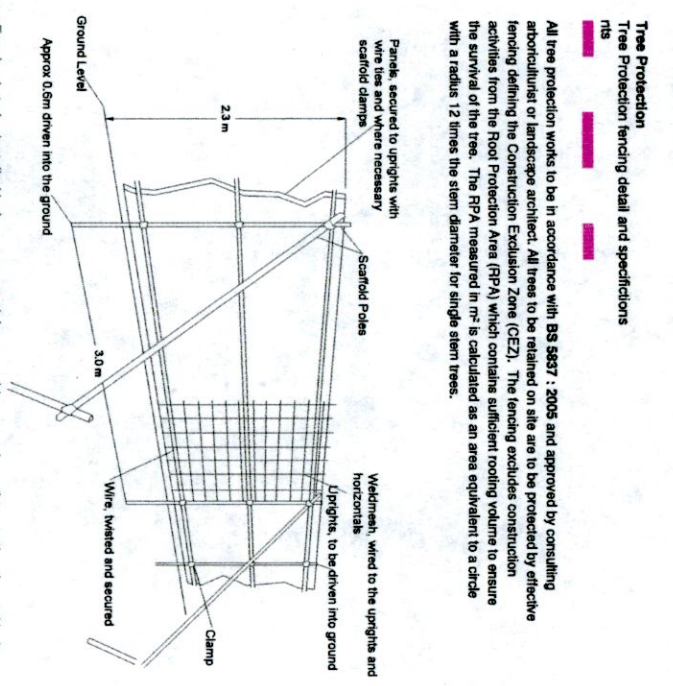

Fencing is to be installed before any materials or machinery are brought onto the site and before any demolition or development, including erection of site huts, commences. Once erected, fencing and ground protection are to be regarded as sacrosanct, and should not be removed or altered without the prior consultation with the consulting arboriculturist or landscape architect. Protective fencing should consist of a scaffold framework in accordance with Figure No. 1 comprising a vertical and horizontal framework, wall braced to resist impacts with vertical tubes spaced at a maximum interval of 3m. On this, well mesh panels or 2m high shunting board should be securely fixed with wire or scaffold clamps. Notices should be erected on the fence with words such as, 'Keep out' or 'No operations past this point'.

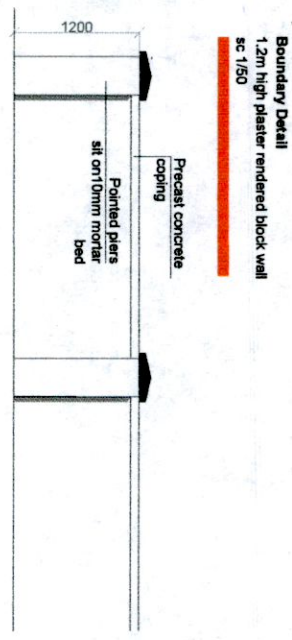

**REFERENCE IMAGES**



**LEGEND**

VEGETATION		
	Existing Trees	To be retained and protected during construction
	Proposed Trees, Multi-stem Trees and Shrubs Planting - 22 no. Total	Screening and border matching existing woodland
	Herbaceous and grasses planting mixture (450mm topsoil depth)	
	Amenity Grass (300mm topsoil depth)	
	Wildflower Meadow as Rain Gardens	Traditional Irish Wildflower Meadow Annual & Perennial mix including the following species referred to in All Ireland Pollinator Plan
	PAVING	
	Exposed aggregate concrete paving surface	
	Gravel	
	Tree protection fencing as per detail	
	1.2m meter high wall as per detail	
	Flush kerb to allow water to drain into planting areas	

**gannon + associates**

CLIENT	Joe Costello	PROJECT TITLE	Proposed Extension at Ballymaice
PROJECT ARCHITECT	John Loney	DATE	August 2022
REVISION	B 03/08/22 Landscape Plan	AP	JG
	A 18/07/22 Landscape Plan	AP	JG
	REV DATE	REVISION	DRAWN CHECKED

SHEET TITLE	Landscape Plan	SHEET SIZE	A2
SHEET NO.	22159_LP_01	REVISION	B
SCALE	1/200	STAGE	Planning Application
DATE	August 2022		