


**Category (A, A1, A2, A3)**  
 Those of high quality and value: in such a condition as to be able to make a substantial contribution (a minimum of 40 years)

**Category (C, C1, C2, C3)**  
 Those of low quality and value: currently in adequate condition to remain until new planting could be established (a minimum of 10 years) or young trees with a stem diameter below 150mm


**Category (B, B1, B2, B3)**

Those of moderate quality and value: those in such a condition as to make a significant contribution (a minimum of 20 years)

**Category (U)**  
 Those in such condition that any existing value would be lost within 10 years and which should, in the current context, be removed for reason of sound abiotic/cultural management

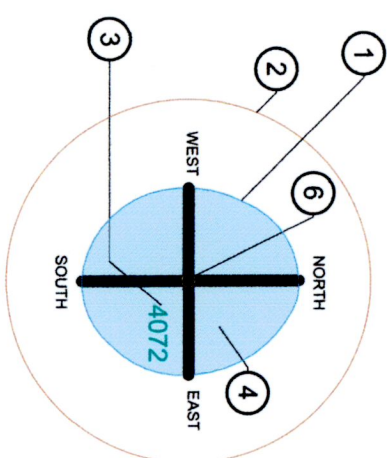

**AGE GROUPINGS**

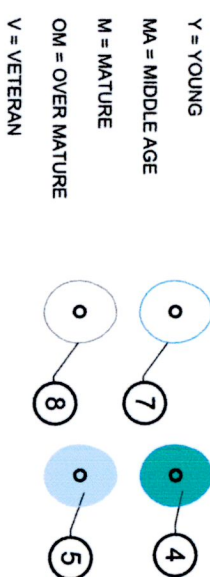

- 1 EXISTING TREE CANOPY BASED ON DIMENSIONS GATHERED ON SITE IN 4 DIRECTIONS, NORTH, SOUTH, EAST AND WEST
- 2 ROOT PROTECTION ZONE BASED ON 12 TIMES THE (DBH) AT CHEST HEIGHT
- 3 TREE TAG NUMBER
- 4 TREE TO BE RETAINED
- 5 TREE TO BE REMOVED
- 6 TREE CATEGORY BASED ON BS:5837 2012 CRITERIA
- 7 DECIDUOUS TREE CANOPY
- 8 EVERGREEN TREE CANOPY

**Client:**  
 John Shenton & Margaret Hanlon  
 Vesey Terrace, Lower Main St, Lucan,  
 K78 VY40, Co. Dublin

**Project:**  
 St Claires Villa, Lucan Road, Co. Dublin

**Drawing Title:** Tree Survey

Drawn By:	Checked By:	Date:	Scale:
WA	MG	18/08/2022	1:200@A3

Drg. No.	CAD File:	Issued For:	Rev.
001	D2041 - St. Claires Villa Gener Issue 27-05-21.DWG	Information	0

**Arbor Care**  
 Unit 1a  
 Crossagalla Enterprise Centre  
 Ballysimon Road  
 Limerick  
 Ireland

Phone: +353 (0)863082808  
 Fax: +353 (0)61400321  
 Email: info@arborcare.ie  
 Web: www.arborcare.ie

