




- Site Boundary
- Street Tree planting
- Open Space Tree planting
- Specimen tree planting
- Columnar tree planting in management areas
- Woodland planting
- Native Hedge planting
- Hedge planting
- Shrub planting
- Screen planting to ESB sub station
- Meadow grass
- Grass
- Mounding and proposed levels
- Amenity area for ball playing / active recreation
- Building Green roof see Architects drawings for details
- Asphalt Concrete AC to Engineers Detail
- Temporary road surface to Engineers detail
- Homezone red chip SMA - 40mm thick
- 200x100x80mm Brick paving to car parking, Charcoal body with a silver trim laid in a herringbone pattern
- Pathways brushed concrete with precast concrete kerb
- Tarmac pathway with precast concrete pencil kerb
- 200x100x80mm Brick paving to entrance pathways, Charcoal body with a silver trim laid in a herringbone pattern
- Bound gravel path
- Bench seat
- Bike stands
- Bins
- Bollards
- Informal play elements, such as tree trunks, boulders etc.
- Proposals outdoor gym equipment, REF to drawing PG-01, PG-02 and PG-03 for details
- Lighting locations and layout See Sabre Electrical Services Ltd for details
- Grass swales
- Bio retention tree pits
- Location of additional street trees in public areas proposed for taking in charge

Note: Side entrance and patio paving to architects detail

Rev.	Date	Note
01	2022-12-12	Corrected roof plan, updated landscape plan.

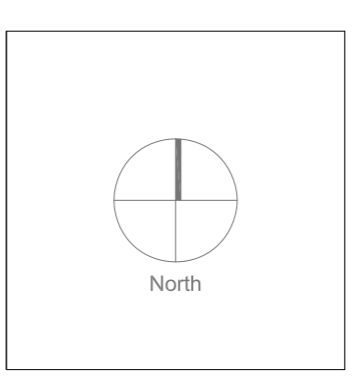

General Notes

Doyle & O'Troithigh
Landscape Architecture

Project Name: Tandy's Lane Village Phase 2
Drawing Name: Overall Landscape Plan

Status	Compliance	Drawing No	LP-01-CO
Project No	19-044	Revision No	00
Scale	1:1000	Drawn By	DOT
Date	09/11/2022	Checked By	D&O

Linda Doyle
Director
+353 (0)87 287 4106
linda@doyle-otroithigh.com

Daire O'Troithigh
Director
+353 (0)86 303 3490
daire@doyle-otroithigh.com

Office Address
Peninsula House
283 Upper Peninsula St
Dublin 2

Contact
mull@doyle-otroithigh.com
+353 (0)1 608 7782