

Proposed Tree Planting
Upright Oak - *Quercus robur* 'fastigiata'
Clear stem.
In Urban Tree Pit or similar approved
(See Rationale for more details)

Defensive planting with gravel drain to building.

S4 Prunus 'Otto Luyken' x 28.no

S4 Prunus 'Otto Luyken' x 8.no
S2 Persicaria affine x 9no.

Proposed Tree Planting
(*Quercus robur* 'fastigiata')

Car Parking

Proposed Pub


Proposed Shop Unit

Parthenocissus tricuspidata to be planted in the two tree pockets to grow across the wall

Ground cover Planting
S2 - Persicaria affine x 56 .no
S5- Lavandula angustifolia x 40 .no

Prunus 'Otto Luyken'

Typical Tree Stake Detail Scale (1:50 @A1)

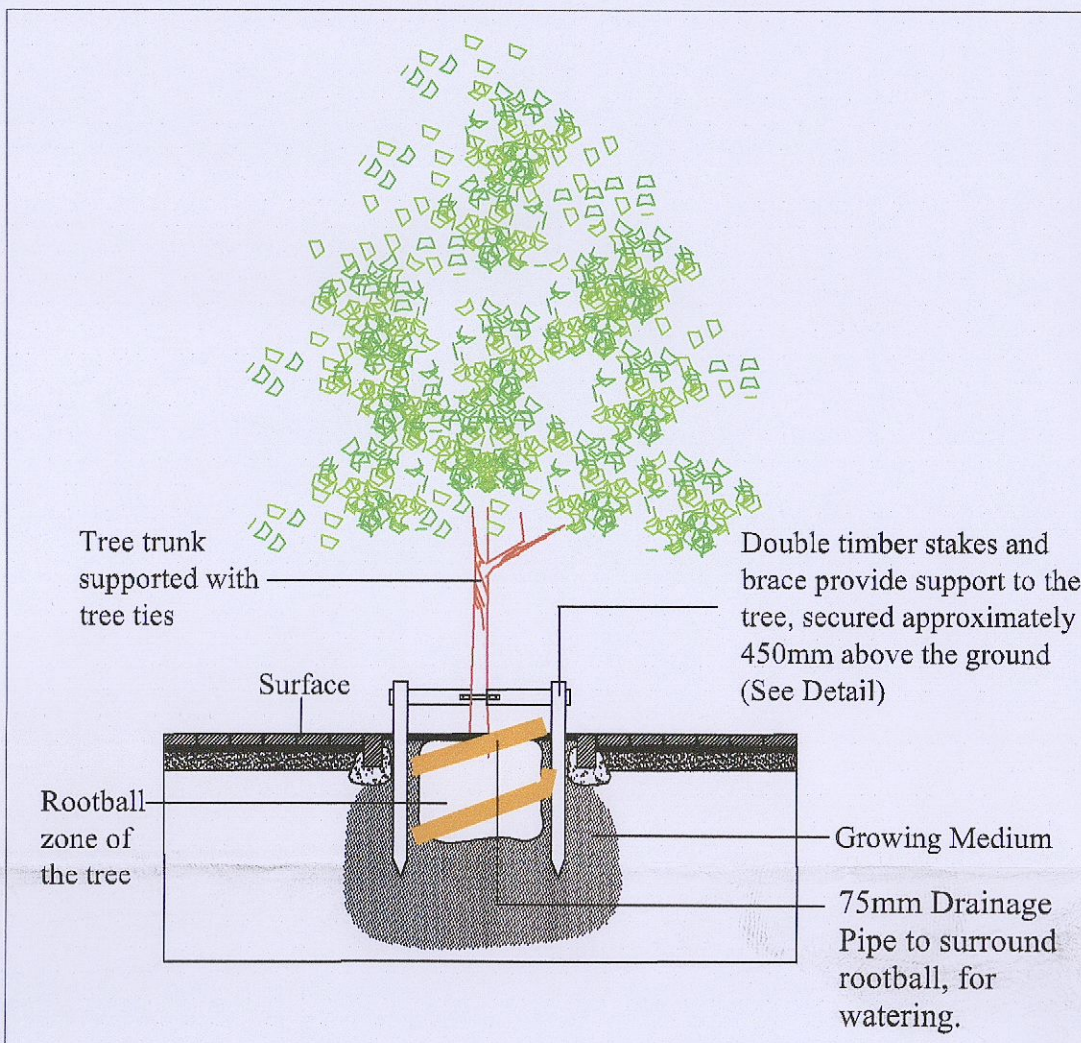

Wildflower Meadow Mix

- Name.
- Common knapweed - *Centaura nigra*
 - Ribwort plantain - *Plantago lanceolata*
 - Red clover - *Trifolium pratense*
 - Bird's-foot trefoil - *Lotus corniculatus*
 - Bulbous buttercup - *Ranunculus bulbosus*
 - Meadow buttercup - *Ranunculus acris*
 - Lady's-bedstraw - *Galium verum*
 - Cowslip - *Primula veris*
 - Oxeye daisy - *Leucanthemum vulgare*
 - Yellow Rattle - *Rhinanthus minor*
 - Common sorrel *Rumex acetosa*
 - Burnet saxifrage - *Pimpinella saxifraga*
 - Autumn hawkbit - *Leontodon autumnalis*
 - Rough hawkbit - *Leontodon hispidus*


Proposed Trees

No.	Name	Size
T1	Acer palmatum 'Sango kaku'	120 cm-150cm
T2	Amelanchier grandiflora	150cm height r/b
T3	Quercus robur 'Fastigiata'	20-25cm
T4	Rhus typhina	150cm height r/b
T5	Betula pendula	14-16cm


LANDSCAPE TREATMENTS:

- Softlandscape**
 - Tree Planting (Please see list below)
- Proposed Grass area
- Proposed Wildflower Planting
- Low Hedge Planting
 - Prunus 'Otto Luyken'
 - Sarcococca spp.
- Defensive Planting beds
 - Low to Ground cover planting
 - S2 Persicaria affine - 7per m2
 - S4 Prunus 'Otto Luyken' - 4per m2
 - S5 Lavandula angustifolia - 4per m2
- Intensive green roof
 - Planting
 - Groundcover & medium size m2
 - S1 Vinca minor - 5per m2
 - S3 Sedum spectabile - 5per m2
 - S6 Hypericum calycinum - 4per m2
 - S7 Miscanthus sinensis - 4per m2
- Extensive green roof
 - Planting
 - Sedum

Typical Landscape details of soil Depth Scale (1:50 @A1)

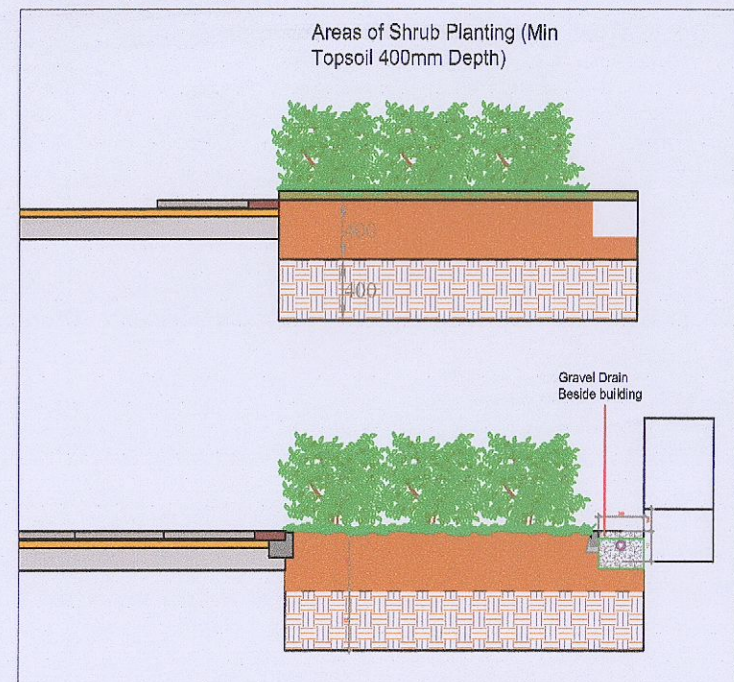

Shrub Planting Detail

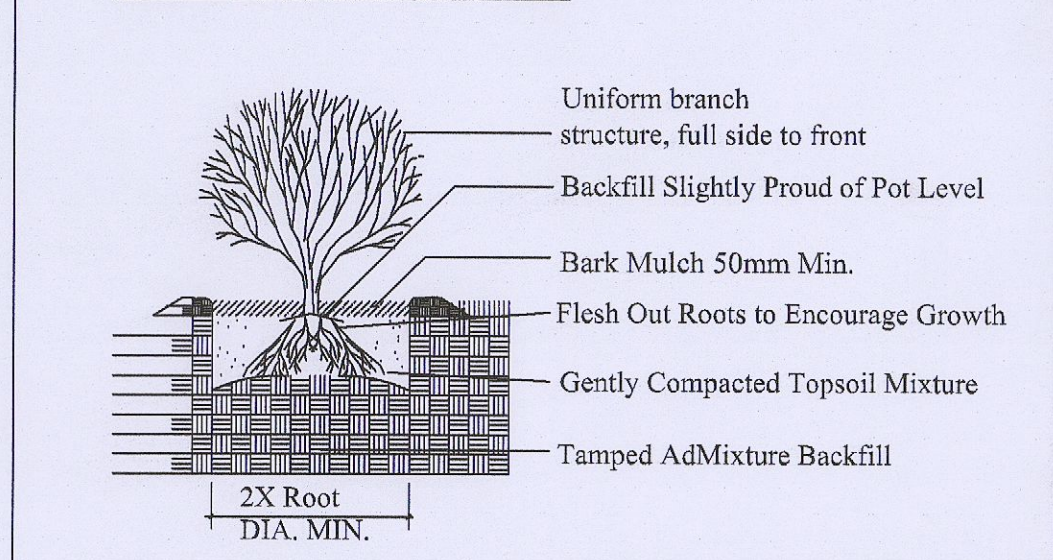

SCHEDULE OF IMPLEMENTATION:

- ALL TREE AND HEDGEROW PLANTING IS TO BE CARRIED OUT DURING THE FIRST WINTER SEASON, I.E. NOVEMBER TO FEBRUARY INCLUSIVE.
- ALL LAWN AREAS ARE TO BE PREPARED AND SEEDED DURING THE GROWING SEASON, I.E. APRIL TO OCTOBER INCLUSIVE.
- ALL CONTAINERISED SHRUB PLANTING MAY BE CARRIED OUT AT ANY TIME OF WHEN SOIL IS NOT FROZEN, WATERLOGGED OR EXCESSIVELY DRY.

PLANTING NOTES:

ALL TREES, SHRUBS AND HEDGEROW PLANTS SHALL COMPLY WITH BS 3936, SPECIFICATION FOR NURSERY STOCK. ALL PRE-PLANTING SITE PREPARATION, PLANTING AND POST PLANTING MAINTENANCE WORKS SHALL BE CARRIED OUT IN ACCORDANCE WITH THE REQUIREMENTS OF BS 4428 (1989) CODE OF PRACTICE FOR GENERAL LANDSCAPE OPERATIONS (EXCLUDING HARD SURFACES).

ALL NEW TREE PLANTING SHALL BE POSITIONED IN ACCORDANCE WITH THE REQUIREMENTS OF TABLE 3 OF BS 5837: 2005 TREE IN RELATION TO CONSTRUCTION: RECOMMENDATIONS, WHICH SPECIFIES MINIMUM DISTANCES BETWEEN NEW PLANTING AND STRUCTURES.


REVISONS:	NO.	DATE	COMMENTS:	DRWN	CHKD
	1	05/12	Update according to Drainage Plan	CW	RMD

PROJECT:
Proposed Mix Development at
Cuckoo's Nest, Greenhills Road, Kilnamanagh, Dublin 24

DWG TITLE:
Landscape Planting Plan

Client
Brian Mulvaney

JOB NO:	DATE:	DRWN:	APPR:
1705	07/06/2022	JC	RMD
DWG NO:	SCALE:	REV:	
04	1:100 - Plan or as shown.	H	

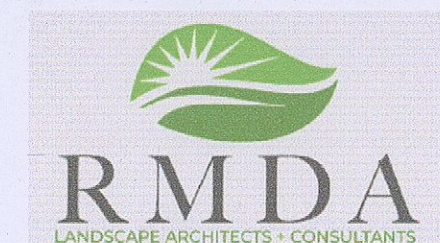

Ronan MacDiarmada +Associates Ltd.
Landscape Architects and Consultants.

Tootenhill, Rathcoole, Co. Dublin
tel: +353 1 412 4476
mob: 086 26 25 438
e-mail: info@rmda.ie