



**ATKINS**


Member of the SNC-Lavalin Group

# Adamstown Block G Amendment

## Design Stage Traffic Management Plan

Quintain Ireland Ltd

October 2021

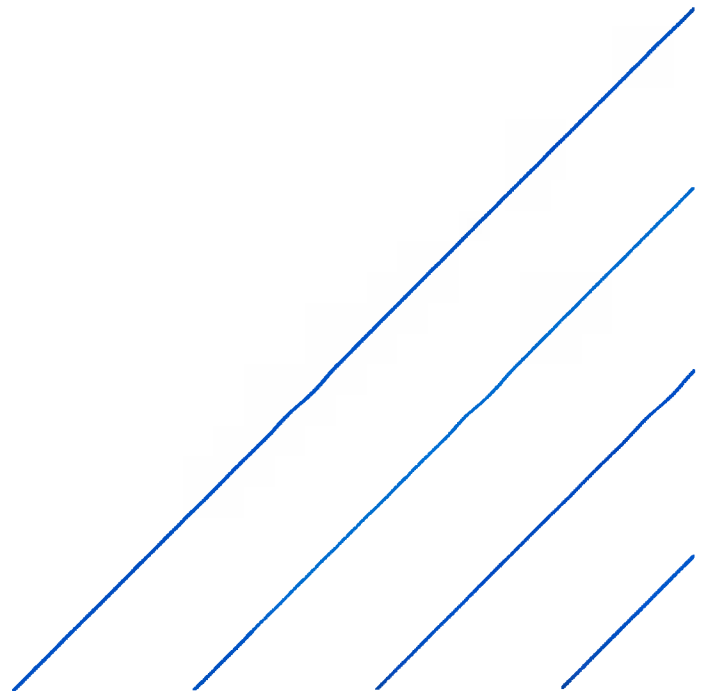

# Notice

This document and its contents have been prepared and are intended solely as information for Quintain Ireland Ltd and use in relation to For Planning

WS Atkins Ireland Limited assumes no responsibility to any other party in respect of or arising out of or in connection with this document and/or its contents.

This document has 19 pages including the cover.

## Document history

Revision	Purpose description	Originated	Checked	Reviewed	Authorised	Date
Rev 1.0	For Planning	PF	PF	KB	KB	13/10/21

## Client signoff

Client	Quintain Ireland Ltd
Project	Adamstown Block G Amendment
Job number	5150924
Client signature / date	

# Contents

Chapter	Page
<b>1. Introduction</b>	<b>4</b>
<b>2. Site Location and Description</b>	<b>5</b>
2.1. Site Location	5
2.2. Proposed Development Description	6
2.3. Characteristics of the Local Road Network	7
2.4. Construction Stage Traffic Impact	9
<b>3. Undertaking the Works</b>	<b>10</b>
3.1. Working Hours	10
3.2. Site Compound	11
<b>4. Traffic Management</b>	<b>12</b>
4.1. Key Principles	12
4.2. Construction Accesses	13
4.3. Haul Roads and Construction Related Deliveries to Site	13
<b>5. Construction Stage Traffic Management Plan</b>	<b>14</b>
5.1. Temporary Road Services	14
5.2. Recovery Vehicles	15
5.3. Special Events	16
5.4. Public Notices	16
<b>6. Key Organisations and Responsibilities</b>	<b>17</b>
6.1. General	17
6.2. Emergency Services	17
6.3. Contact Details	18
 <b>Tables</b>	
Table 6-1 - Contact Table	18
 <b>Figures</b>	
Figure 2-1 - Block G Site Location	5
Figure 2-2 - Block G Development Site Layout	7
Figure 2-3 - Block G Construction Access Routes	9
Figure 3-1 – Block G Site Compound Locations	11

# 1. Introduction

This Design Stage Traffic Management Plan sets out the requirements for traffic management during the construction period and provides information on the existing public roads impacted by the works. The Plan has been prepared in accordance with the requirements of the following documents:

- Traffic Signs Manual (Chapter 8 – Temporary Traffic Measures and Signs for Roadworks) published by the Department of Transport.
- Guidance for the Control and Management of Traffic at Road Works published also by the Department of Transport.

The purpose of this Design Stage Traffic Management Plan is to provide a basis for the management of traffic during the execution of the works to be undertaken by the Project Supervisor for the Construction Stage (PSCS)/Contractor for the project.

In accordance with duties imposed by the Safety, Health and Welfare at Work (Construction) Regulations 2013, subsequent amendments and the 'Guidance for the Control and Management of Traffic at Road Works', this plan must be further developed into a Construction Stage Traffic Management Plan by the PSCS/Contractor prior to commencing the works and must not be implemented until it has been assessed and developed by the PSCS/Contractor.

The Contractor must obtain approval from the Local Authority for the developed Construction Stage Traffic Management Plan before commencement of construction.

The intention of the plan is to ensure the safety of all workers and all road users both in and around the works during the construction stage.

This planning and design exercise is also carried out to identify and keep the impact of the works on traffic movements on public and private roads, and other local roads, to a minimum.

Particular and significant risks in relation to traffic management associated with the construction of the project are detailed along with measures taken to avoid, minimise, or reduce these risks to acceptable levels where this is reasonably practicable

## 2. Site Location and Description

### 2.1. Site Location

The location of the proposed development site is shown in Figure 2-1 below. The site area for the Block G of the Adamstown District Centre Development Site is approximately 1.0544 hectares.

The Adamstown District Centre Block G development site is bordered to the north by Adamstown Avenue, to the south by Station Road and to the east by Adamstown Park. The development site is located north of Adamstown Rail Station. Adamstown Boulevard terminates to the north-west of the development.

The Adamstown District Centre Block G development site will be served by vehicular junctions off Adamstown Avenue and Station Road.

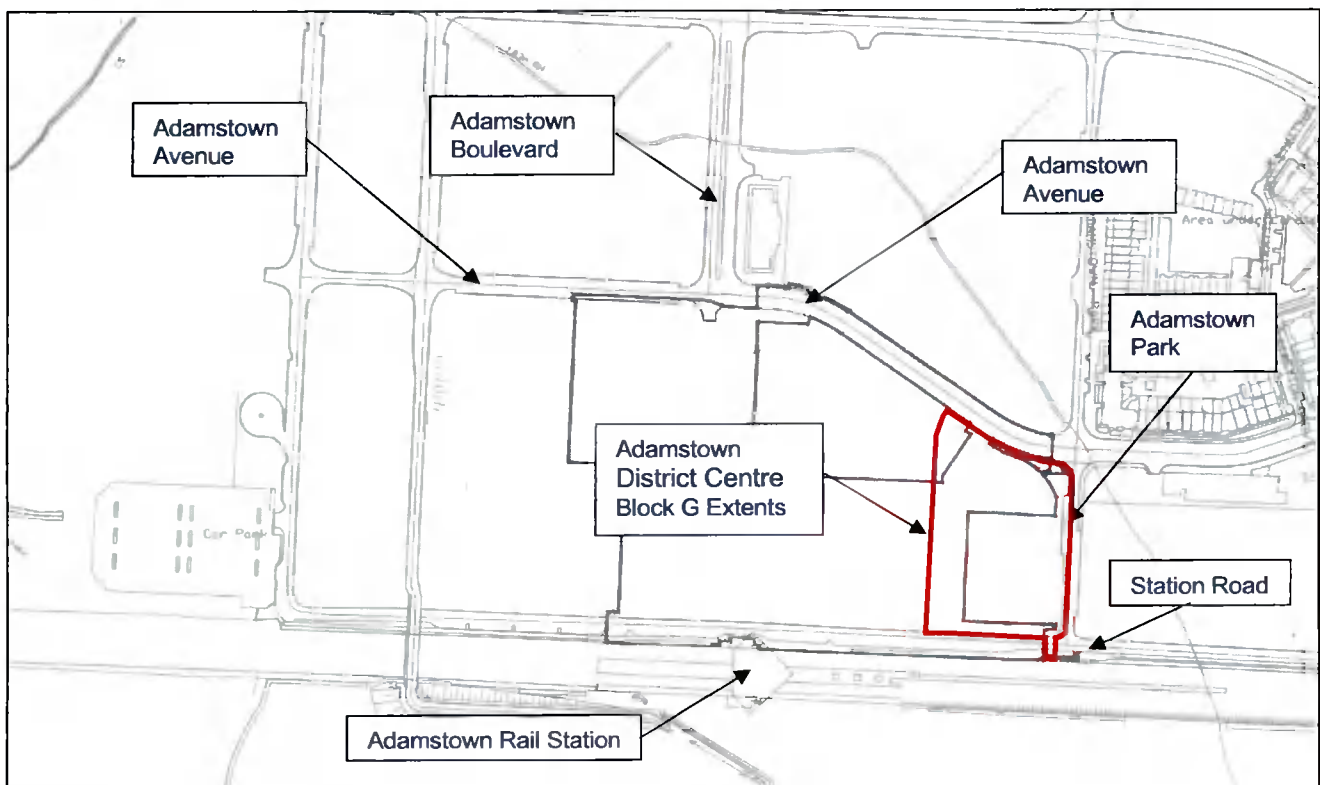


Figure 2-1 - Block G Site Location

## 2.2. Proposed Development Description

The proposed development comprises the following:

- Repositioning of landscaped communal courtyard of Block G from first floor level to ground floor level due to removal of podium parking at level 0, and the consequential relocation of 83no. car parking spaces to within the Block F car park and to on-street locations immediately adjacent to Block G, including ancillary site development and landscape works.
- The introduction of 9no. ground floor units, facilitated by the removal of the podium from the core.
- A minor reduction to the overall provision of residential units from 185 to 184no. apartment units.
- The provision of an additional unit and changes to the unit mix on Level 1.
- Adjustments to the location of the bicycle, plant, and waste stores serving Block G.
- Adjustments to Block G2 consisting of a minor reduction to the footprint of the Block by 0.6m, the removal of setback to the North (level 5) and adjustments to the Southern gable.

This application seeks permission for these minor design changes to the development permitted under SDCC Reg Ref SDZ21A/0007.

The development also includes the provision of ancillary site development and landscape works.

The proposed Adamstown District Centre Block G development site is as shown in Figure 2-2 below which details site layout in respect to the adjacent road network.

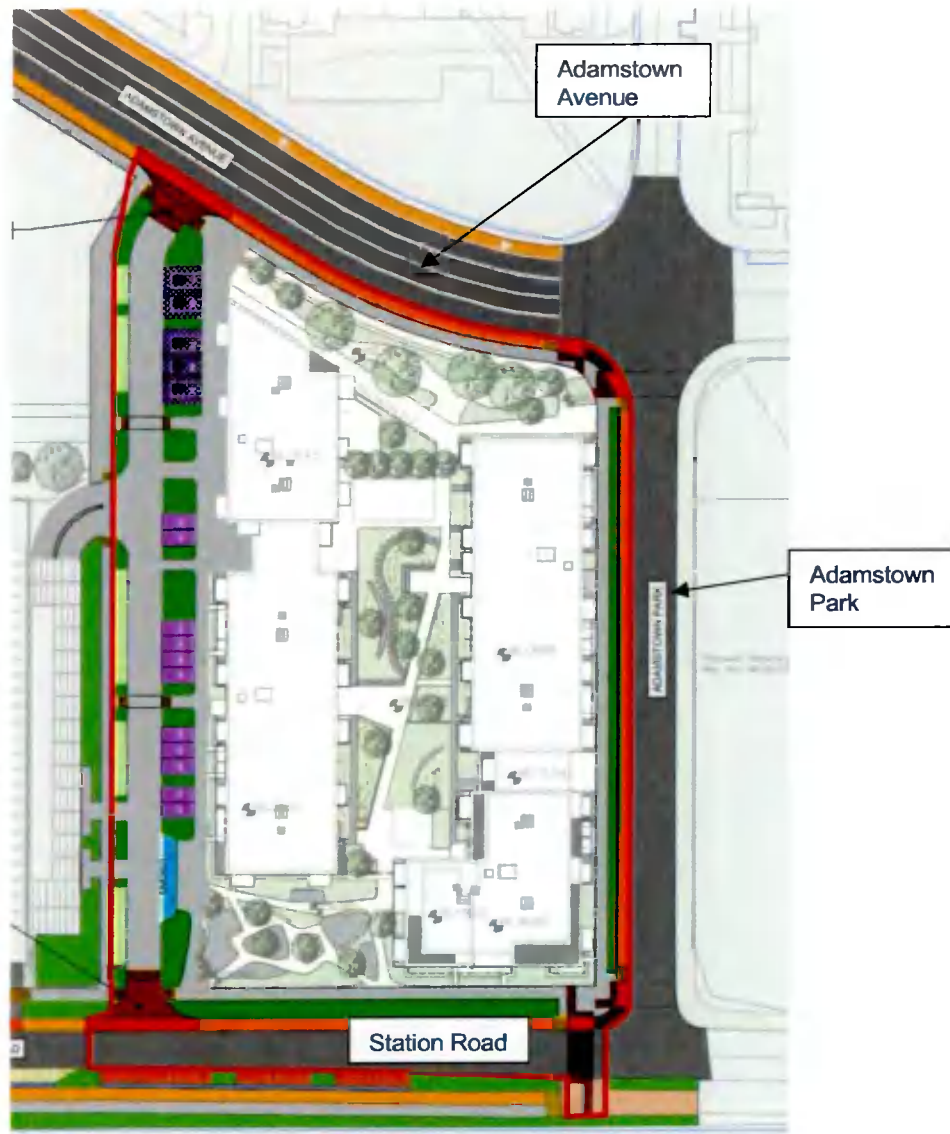


Figure 2-2 - Block G Development Site Layout

Access to the site will be gained off junctions with Adamstown Avenue and Station Road. The proposed form of junctions for the Adamstown District Centre Block G development access is priority junctions, these junctions are described in further detail in the Roads Engineering Report.

## 2.3. Characteristics of the Local Road Network

### 2.3.1. Adamstown Avenue

The proposed Adamstown District Centre Block G development will access onto Adamstown Avenue. East of the Adamstown Boulevard signalised junction Adamstown Avenue is a single carriageway road with bus lane provision provided each side of the road. West of the signalised junction Adamstown Avenue is a single carriageway road. To the east Adamstown Avenue provides access to the R120 Newcastle Road. To the west Adamstown Avenue will provide access to the R403 Celbridge Road via the recently approved Celbridge Link Road.

### 2.3.2. Station Road

The proposed Adamstown District Centre Block G development will access onto Station Road, Station Road is a single carriageway road. To the east Station Road provides access to the R120 Newcastle Road and R136 Ballyowen Road via the Adamstown Link Road. To the west Station Road will provide access to the R403 Celbridge Road via the recently approved Celbridge Link Road.

### 2.3.3. Adamstown Boulevard

Adamstown Boulevard terminates to the north-west of the proposed Adamstown District Centre Block G development, Adamstown Boulevard is a single carriageway road with bus lane provision provided each side of the road. To the north Adamstown Boulevard provides access to Lucan via the Dodsborough Road.

### 2.3.4. Adamstown Park

Adamstown Park runs to the east of the proposed Adamstown District Centre Block G development, Adamstown Park is a single carriageway road which connects to Adamstown Avenue to the north and Station Road to the south.



## 2.4. Construction Stage Traffic Impact

At construction stage the traffic volumes will be, at their peak, notably less than the traffic volumes predicted for the completed development. In this context the existing junctions and the proposed development junctions will have adequate capacity to accommodate the relatively modest traffic volumes anticipated during the construction stage. The main construction access to and from the proposed Adamstown District Centre Block G Development Site will be off either off Adamstown Avenue or Station Road. The construction access routes are detailed in figure 2-3 below.

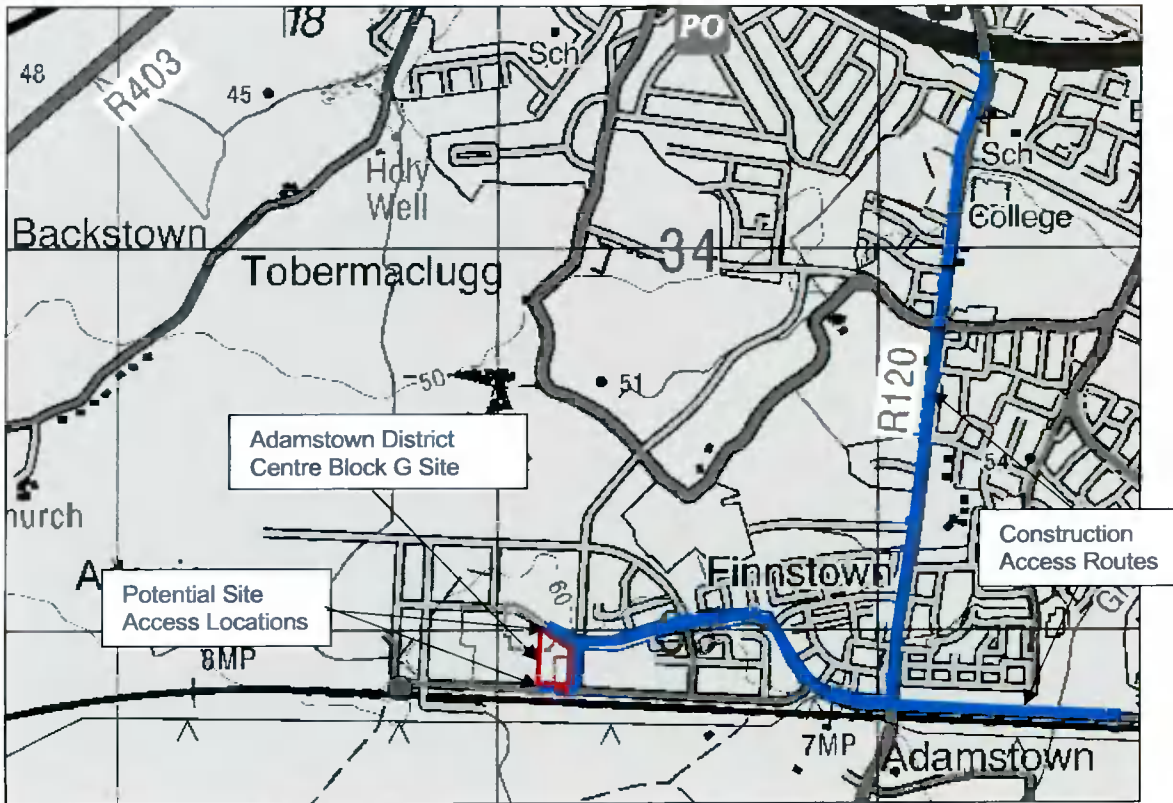


Figure 2-3 - Block G Construction Access Routes

The construction access location and construction access route will be agreed with South Dublin County Council prior to the generation and submission of the Construction Stage Traffic Management Plan.

## 3. Undertaking the Works

All of the works to be undertaken on the public roads have a speed limit of 50kph or under. In accordance with Chapter 8 of the Traffic Signs Manual, the designation of the road for Traffic Management Design Parameters will be Level 2.

Temporary safety or pedestrian barriers placed around the working area should be clearly defined by temporary road markings, signage and coning as specified in the Traffic Signs Manual. The PSCS shall carry out a risk assessment before commencing any works on site, to determine the type of barriers (if any) and cones most suitable for the works. Provision shall be made at all times to maintain safe pedestrian passage along these public roads with provision of appropriate temporary pedestrian routes around the works area as required.

It is the Contractor's responsibility to keep informed, inter alia by close liaison with the Garda, the Client, the Roads Department of South Dublin County Council, and the Employer's Representative, of other ongoing or planned construction events which may impact upon his works.

The Contractor must submit the developed Construction Stage Traffic Management Plan to the Employer's Representative & South Dublin County Council for review and approval before commencement of construction. The Contractor is responsible for the erection, maintenance and removal of all traffic management measures and signage.

South Dublin County Council's procedures for road opening licences must be strictly adhered to. The Contractor is entirely responsible for obtaining Road Opening Licenses and Road Closures as necessary to enable him to fulfil his contractual obligations.

The construction accesses are indicated in figure 2-2. These accesses will serve as the construction accesses to the Adamstown District Centre Phase 1 development site for the duration of the works. The required sight lines at these junctions will be made immediately available.

Access for deliveries and the emergency services will have to be facilitated into the site via these access routes, and the access junctions. Specific traffic control measures during the works are detailed in Section 4 following herein.

The Contractor shall continually risk assess all temporary traffic management installations to determine if the measures taken have had the desired effect in reducing traffic speeds to an appropriate level during the course of the works.

If traffic speeds are deemed inappropriate, the Contractor is to provide additional traffic management measures to reduce such speeds to a level appropriate to the works. The design of any such measures must be subjected to risk assessment which must be passed to the PSDP for review before being implemented.

Static lane closures resulting in one-way shuttle traffic movements past the works are only permitted on a single section of the works at a time i.e. static lane closures may not be implemented on more than one section of road simultaneously.

### 3.1. Working Hours

Working hours will be from 8am - 7pm Monday to Friday and from 8am - 2pm on Saturdays. Working will not be permitted on Sundays or Public Holidays.

Working outside the hours noted above and on Sundays or Public Holidays shall only be by written agreement between the Employer's Representative and South Dublin County Council.

### 3.2. Site Compound

The Contractor is responsible for proposing a suitable location for the site compounds with respect to the Adamstown Station Phase 1 Development Site and shall liaise with the Employer's Representative to agree the proposed location.

Opportunities exist within the site for locating the site compound, indicative locations are detailed in figure 3-1. The compound for each site will be of adequate size to accommodate site staff parking appropriate to the level of site activity anticipated for sites of these scale.

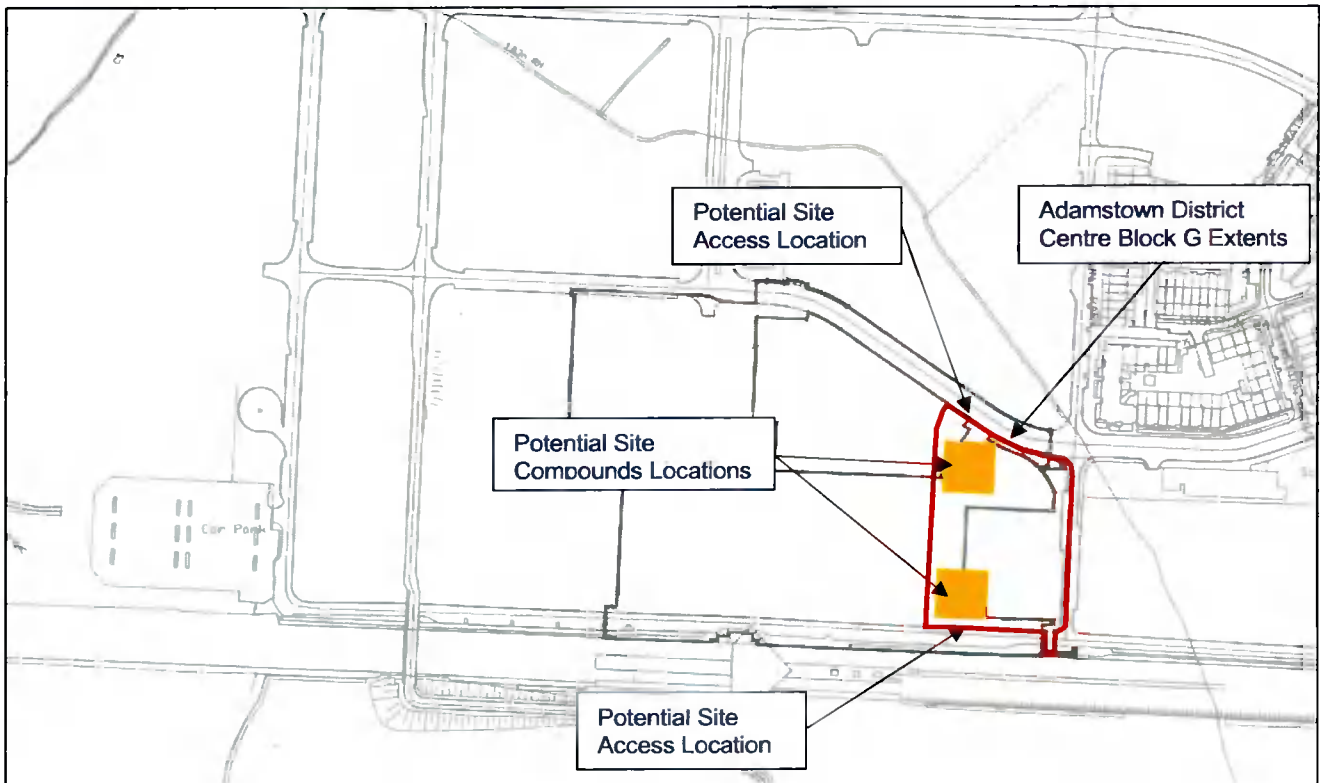


Figure 3-1 – Block G Site Compound Locations

In any case, the proposed location of the site compounds shall be agreed with the Employer's Representative.

The Contractor is responsible for providing car parking for all site staff and visitors within the sites and shall liaise with the Employer's Representative to agree the proposed car parking locations. Parking on the adjacent streets or nearby residential areas is strictly prohibited.

## 4. Traffic Management

### 4.1. Key Principles

Public access must be maintained past the works at all times for vehicles and cyclists, and along the footway past both of the proposed site entrances for pedestrians.

Adamstown Avenue and Station Road are single carriageway roads and have a speed limit of 50kph. In accordance with Chapter 8 of the Traffic Signs Manual, the designation of these roads for Traffic Management Design Parameters will be Level 2. As the works will operate in all flow and visibility conditions and will remain in position for a duration in excess of 24 hours, it is anticipated that the class of the roadworks will be 'Type A'. Traffic management design parameters shall therefore be in accordance with Table 8.3.2 Type A of the Traffic Signs Manual.

The Contractor must ensure that, wherever possible, two-way traffic is safely maintained along these roads during the works. Where it is not possible to safely maintain two-way traffic flow, then alternative arrangements for the control and management of traffic must be agreed with and approved in writing by the Employers Representative and the Road Department of South Dublin County Council.

In this regard where it is not possible to maintain two-way traffic flow it would be anticipated that static lane closures would be required. In this instance the Contractor may use temporary traffic-signal-controls or STOP/GO single lane shuttle working to facilitate the works if necessary, provided the required consents and detailed Construction Stage Traffic Management Plan approvals have been received from South Dublin County Council's Roads Department, An Garda Síochána and the emergency services.

If full road closure of any road is required the closure period must be kept to a minimum and local residential access must be maintained at all times. In the context of a full road closure the Construction Stage Traffic Management Plan must clearly set out the alternative detour routes, to be agreed with south Dublin County Council and Gardai, and the required traffic management measures to safely and efficiently reroute traffic to these routes. If a road closure is required, the statutory process set out in Section 75 of the Roads Act 1993 and guidance set out within Section 8.38, Chapter 8 of the Traffic Signs Manual are to be followed.

Full time access for local residents must be maintained and managed. Should traffic-signal-controls be used then they must be vehicle actuated and suspended in favour of manually operated STOP/GO control to prevent unacceptable delays or queuing.

Two-way access for pedestrians must be maintained in accordance with the Traffic Signs Manual at all times. Where works are to occupy footpaths then dedicated protected routes must be provided that do not require crossing of the carriageway in accordance with Chapter 8 of the Traffic Signs Manual. The routes must be adequately supervised and maintained to ensure that pedestrians do not encroach into the works area.

Regular meetings between the Employer's Representative, the Contractor, South Dublin County Council, the Gardai and other emergency services shall be arranged by the Contractor and shall take place throughout the Construction Period; as well as at initiation or changes of Traffic Management layouts and at any other time deemed necessary by any of these parties. Such meetings shall take account of any special events that may require particular Traffic Management Operations.

The works are to be programmed in such a manner as to reduce disruption to local residents or businesses along the road.

## 4.2. Construction Accesses

The following provisions shall be made in terms of traffic management at construction access points:

- Advance warning signage of construction access points shall be adequately signed on Adamstown Avenue and Station Road, including local side roads, i.e. "construction vehicle access ahead";
- Construction access gates shall remain closed when not in use;
- A site safety notice shall be erected at construction access points;
- Temporary traffic management measures deployed during the hours of darkness shall serve to highlight the precise location of the construction access. Such measures could include additional traffic cones, road danger lamps and/or reflectorized signage;
- Routine inspection shall be carried out to ensure that signage and visibility splays are not obstructed;
- The road network immediately outside each site access shall be regularly inspected for cleanliness and cleaned as necessary. Any damage to the roads or local side roads caused by construction traffic shall be repaired as necessary; and
- Within the site, sufficient space shall be allocated to allow vehicles to turn around safely on-site.

## 4.3. Haul Roads and Construction Related Deliveries to Site

### 4.3.1. Permissible Haul Routes

The Contractor shall use the routes indicated on figure 2-3 as the haul route and for the purpose of deliveries for the Adamstown District Centre Block G Development Site.

### 4.3.2. Delivery Restrictions to Limit Risks for Residents

Deliveries are expressly prohibited 30 minutes either side of peak hours, i.e. 30 minutes before or after 08.00 – 09.00 am, and 30 minutes before or after 17.00 – 18.00 pm.

### 4.3.3. Mitigation Measures

Marshalling should be provided to manage construction vehicles access the Adamstown District Centre Block G Development Site and ensure there is no conflicts with public vehicles along Adamstown Avenue or Station Road.

## 5. Construction Stage Traffic Management Plan

The Contractor shall develop this Design Process Traffic Management Plan into a Construction Stage Traffic Management Plan prior to undertaking the works.

The Construction Stage Traffic Management Plan must be submitted to the Employers Representative and South Dublin County Council for review and agreed prior to work commencing and shall include drawings detailing all proposed temporary traffic management arrangements including those listed below:

- The location and details of all proposed temporary traffic management measures including any lane closures and construction vehicle accesses;
- Separate detailed plans in AutoCAD format showing all significant construction stages and phases;
- The location and details of all temporary signage in full compliance with Chapter 8 including road markings;
- Bespoke designs for each phase or stage must be included, standard traffic management layouts from Chapter 8 are not acceptable;
- The location and details of all temporary safety and pedestrian barriers should be shown;
- Details of any temporary traffic diversions including location and details of all diversion signage;
- Details of any temporary pavement surfaces required to facilitate the works should be described;
- Details of anticipated works deliveries and storage of materials;
- Risk Assessments for design and construction of temporary traffic management where relevant.

The Construction Stage Traffic Management Plan including details of all proposed temporary traffic management measures to facilitate traffic movements during the works must be lodged with the Employers Representative and South Dublin County Council for consideration, a minimum of 14 days prior to the date on which it is proposed to commence the works.

The PSCS/Contractor shall supply, erect and maintain, for the duration of the Works, adequate warning and diversion signs and any other signs or traffic signals which may be considered necessary.

The PSCS/Contractor shall keep clean and legible at all times all traffic signs, lamps, barriers and traffic control signals and shall re-position, cover or remove them as necessary during the progress of the works.

### 5.1. Temporary Road Services

The Contractor shall be responsible for the temporary restoration of existing carriageways outside of the subject site, in the event that they are damaged as a result of the Works. Any temporary restoration of the roads shall be carried out to the satisfaction of the Employers Representative and South Dublin County Council.

In the event of any interference with existing road markings, the Contractor shall arrange for immediate replacement with temporary markings and arrange with the Employers Representative and South Dublin County Council to have permanent markings restored.

## 5.2. Recovery Vehicles

The use of a recovery vehicle is not required.

The Contractor is responsible however for the removal of shed/dropped loads and vehicles that are stationary due to mechanical breakdowns, accident damage, or have been abandoned in the trafficked road within the temporary traffic management works.

The Contractor shall be required to remove the obstruction clear of the execution and completion of the Works, such that the running carriageway is cleared in the shortest possible time.

### 5.3. Special Events

The Contractor must ensure that the Programme and Construction Stage Traffic Management Plan is cognisant of and flexible to accommodate spikes in traffic flows associated with planned events in the locality.

Notwithstanding any consents or approvals granted for the Construction Stage Traffic Management Plan by South Dublin County Council's Roads Department, An Garda Síochána and the emergency services; South Dublin County Council and An Garda Síochána reserve the right to modify, remove or postpone the implementation of a particular Construction Stage Traffic Management system if deemed necessary by traffic conditions at any time during the works.

Regular meetings between the Employer's Representative, the Contractor, South Dublin County Council, the Gardaí and other emergency services shall be arranged by the Contractor and shall take place throughout the Construction Period; as well as at initiation or changes of Traffic Management layouts and at any other time deemed necessary by any of these parties. Such meetings shall take account of any special events that may require particular Traffic Management Operations.

### 5.4. Public Notices

Information on proposed Temporary Traffic Management measures, including potential delay times, locations and duration of lane closures etc. should be agreed with South Dublin County Council and the Employer's Representative, and announced in advance using various media e.g. press releases, local/national radio stations and AA Roadwatch.



## 6. Key Organisations and Responsibilities

### 6.1. General

The following parties will have an input into the Temporary Traffic Management Scheme in this contract and should be kept informed of developments in relation to traffic management:

- PSCS/Contractor;
- Employer's Representative;
- South Dublin County Council;
- Garda Síochána & Emergency Services;
- PSDP.

The Contractor shall consult with the Gardaí, the emergency services and other relevant authorities (listed above) during the preparation of the Construction Stage Traffic Management Plan. The Contractor shall have due regard to the impact of the proposals on the general traffic situation and possible conflicts with other contracts, activities or events.

The Contractor shall co-ordinate the implementation of the developed traffic management plan during the works. Where problems associated with temporary traffic management are observed by or notified to the Contractor, the Contractor shall consult with the Employers Representative, PSDP and South Dublin County Council to revise or modify the traffic management plan as necessary.

### 6.2. Emergency Services

In relation to any accidents or incidents occurring on or caused by the works, the Contractor shall provide all necessary assistance to deal with the emergency to the Gardaí, Ambulance and Fire Brigade services.


The Contractor shall notify in advance the local ambulance officer and the local fire officer of any road closures, temporary traffic lights, and other Traffic Management proposals so that potential disruption to emergency ambulance and fire brigade response can be planned and minimised.

### 6.3. Contact Details

A list of relevant contact names and telephone numbers are contained in Table 6.1 following:

**Table 6-1 - Contact Table**

Name:	Telephone No's
<b>Client:</b> Quintain Developments Ireland Ltd, Fitzwilliam Court, Leeson Close, Dublin 2, D02 YW24	01 5260352
<b>Employers Representative:</b> To be confirmed	To be confirmed
<b>Architect:</b> Henry J Lyons	01 888 3333
<b>Engineer:</b> Atkins Consulting Engineers, Atkins House, 150 Lakeshore Drive, Airside Business Park, Swords, Co. Dublin.	01 810 8100
<b>South Dublin County Council Roads Department:</b> County Hall Tallaght, Dublin 24, D24 YNN5	01 414 9000
<b>Garda Síochána:</b> Lucan Garda Station, Dorney Court, Main Street Lucan, Co. Dublin.	999 / 112 01 666 7300
<b>Fire Service:</b> Leixlip Fire Station, Mill Ln, St. Catherine's Park, Leixlip, Co. Kildare	999 / 112 01 624 4455
<b>Ambulance Service:</b> Hermitage Medical Clinic Emergency Department, Old Lucan Rd, Fonthill, Dublin, D20 W722	999 / 112 01 6459016

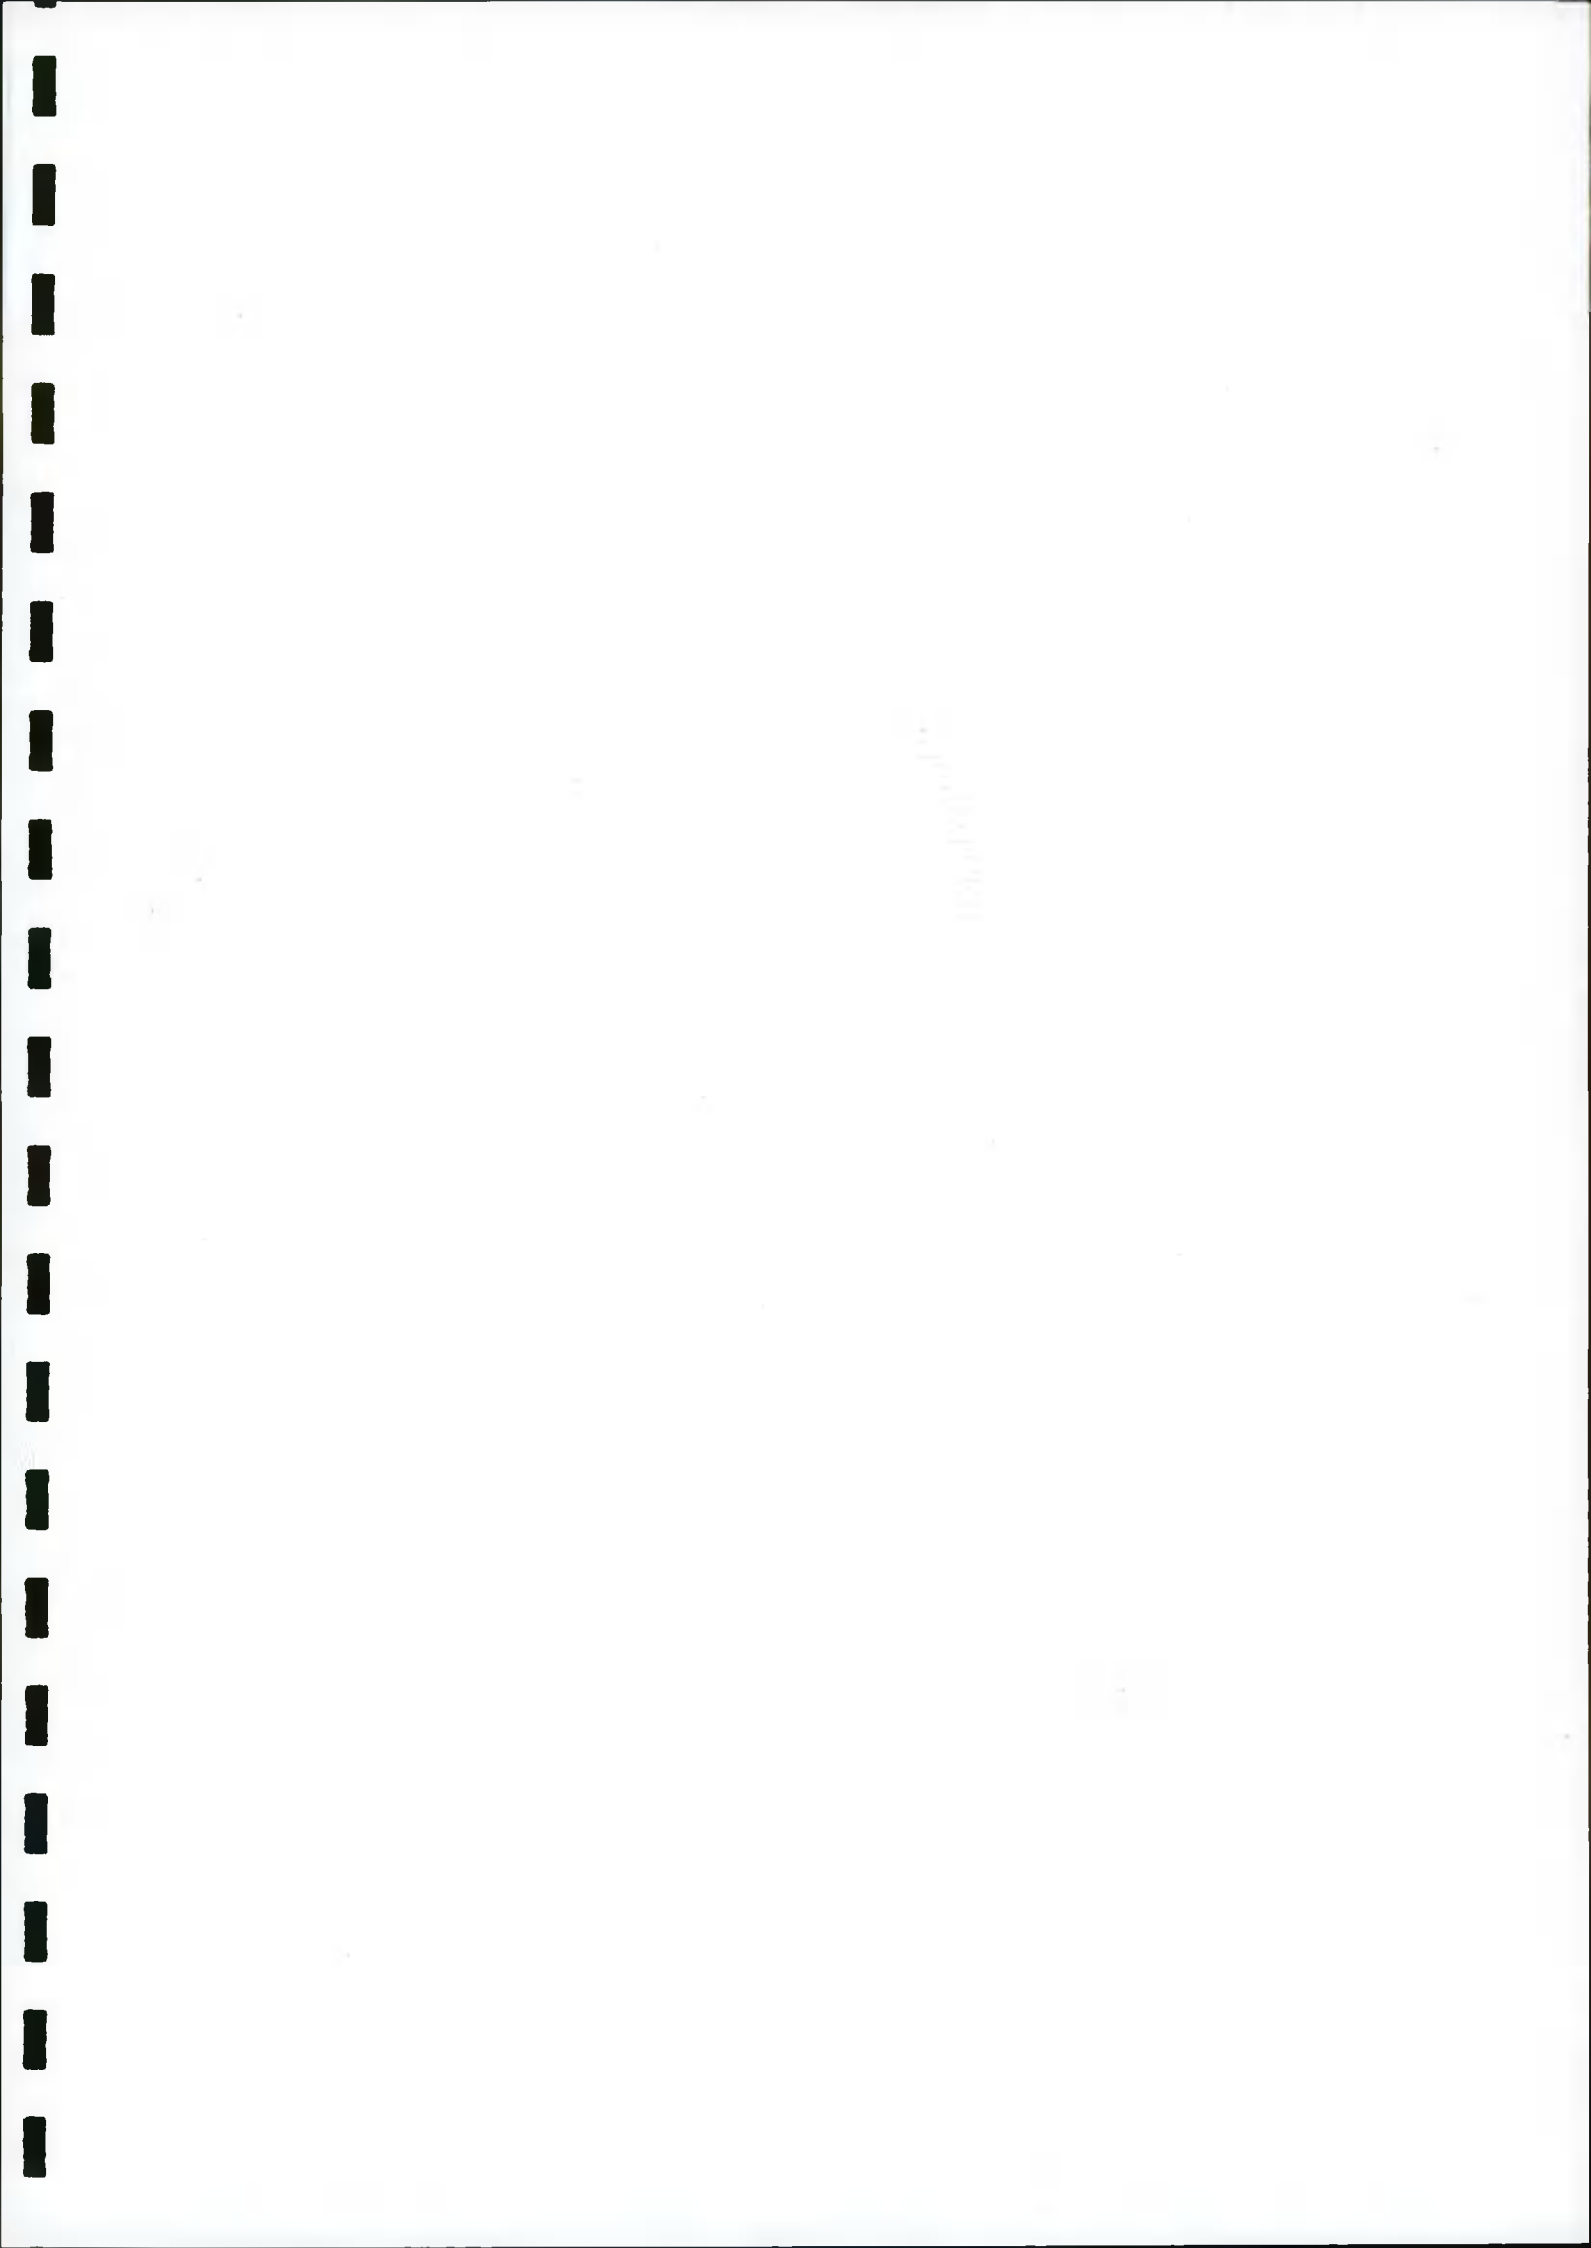

Peter Foley  
**WS Atkins Ireland Limited**  
Unit 2B  
2200 Cork Airport Business Park  
Cork  
T12 R279

Tel: +353 21 429 0300

© WS Atkins Ireland Limited except where stated otherwise